



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

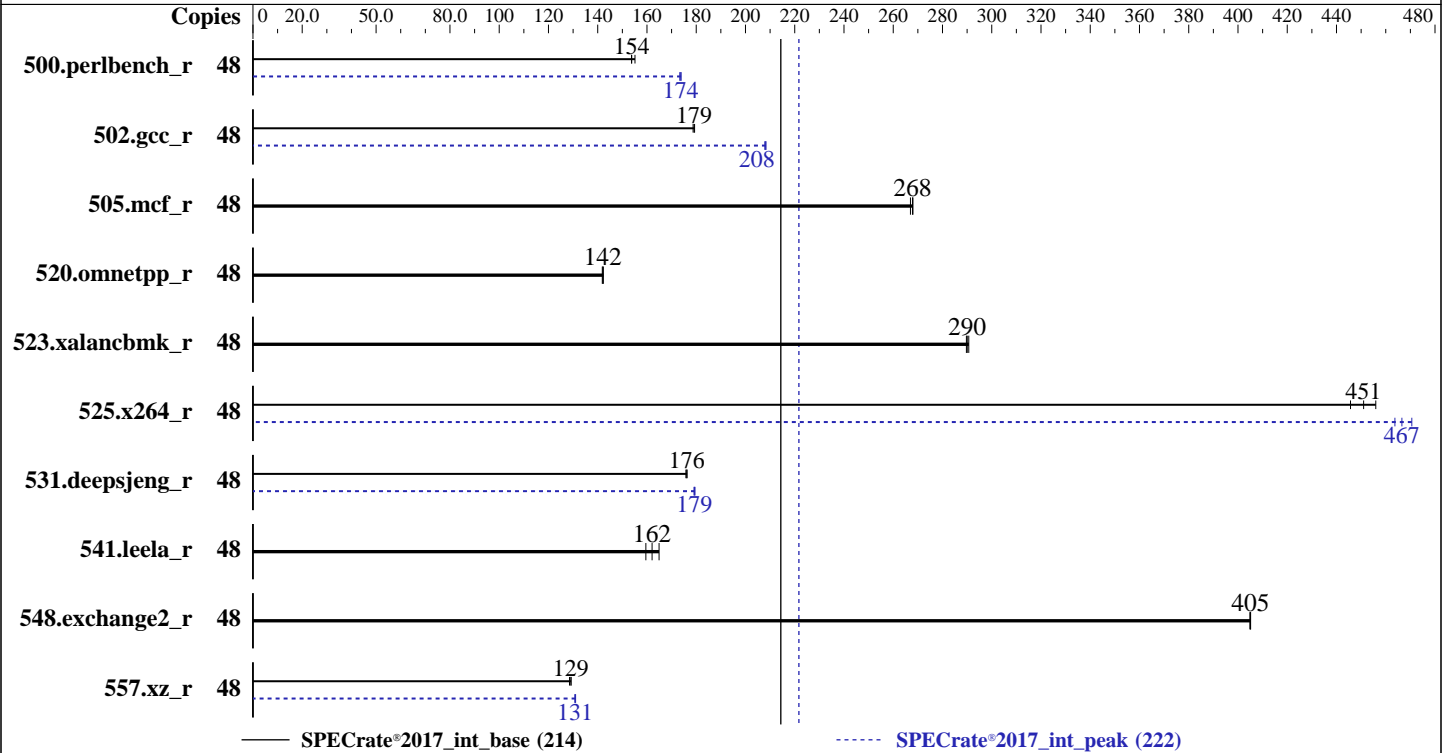

### Hardware

CPU Name: Intel Xeon Gold 6256  
 Max MHz: 4500  
 Nominal: 3600  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler Build 20190815 for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler Build 20190815 for Linux  
 Parallel: No  
 Firmware: Version 6102 released Dec-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	493	155	497	154	<b>497</b>	<b>154</b>	48	<b>440</b>	<b>174</b>	441	173	440	174
502.gcc_r	48	379	179	380	179	<b>379</b>	<b>179</b>	48	326	208	327	208	<b>326</b>	<b>208</b>
505.mcf_r	48	<b>290</b>	<b>268</b>	289	268	291	267	48	<b>290</b>	<b>268</b>	289	268	291	267
520.omnetpp_r	48	<b>443</b>	<b>142</b>	444	142	443	142	48	<b>443</b>	<b>142</b>	444	142	443	142
523.xalancbmk_r	48	<b>175</b>	<b>290</b>	175	290	174	291	48	<b>175</b>	<b>290</b>	175	290	174	291
525.x264_r	48	<b>186</b>	<b>451</b>	189	446	184	456	48	179	471	181	464	<b>180</b>	<b>467</b>
531.deepsjeng_r	48	313	176	312	176	<b>312</b>	<b>176</b>	48	306	180	<b>307</b>	<b>179</b>	307	179
541.leela_r	48	482	165	<b>490</b>	<b>162</b>	498	160	48	482	165	<b>490</b>	<b>162</b>	498	160
548.exchange2_r	48	311	405	<b>310</b>	<b>405</b>	310	405	48	311	405	<b>310</b>	<b>405</b>	310	405
557.xz_r	48	401	129	<b>401</b>	<b>129</b>	403	129	48	<b>396</b>	<b>131</b>	396	131	396	131

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/spec2017\_19u5/lib/intel64:/spec2017\_19u5/lib/ia32:/spec2017\_19u5/je5.0  
.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The jemalloc library was configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Patrol Scrub = Disabled  
ENERGY\_PERF\_BIAS\_CFG mode = performance  
SNC = Enabled  
IMC interleaving = 1-way  
Engine Boost = Level3(Max)  
Enforce POR = Disable  
Memory Frequency = 2933  
LLC dead line allc = Disabled  
SR-IOV Support = Disabled  
CSM Support = Disabled

```
Sysinfo program /spec2017_19u5/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-628j Tue Apr 14 01:27:56 2020
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
2 "physical id"s (chips)
48 "processors"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

### Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 3 10 12 13 16 17 21 25 26 27 29
physical 1: cores 2 4 5 9 11 13 16 18 21 24 26 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
Stepping:              7
CPU MHz:               3600.000
CPU max MHz:           4500.0000
CPU min MHz:           1200.0000
BogoMIPS:              7200.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              33792K
NUMA node0 CPU(s):    0,2,5,6,8,9,24,26,29,30,32,33
NUMA node1 CPU(s):    1,3,4,7,10,11,25,27,28,31,34,35
NUMA node2 CPU(s):    12,15,18,19,21,22,36,39,42,43,45,46
NUMA node3 CPU(s):    13,14,16,17,20,23,37,38,40,41,44,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

### Platform Notes (Continued)

ospke avx512\_vnni md\_clear flush\_llid arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 2 5 6 8 9 24 26 29 30 32 33
node 0 size: 192080 MB
node 0 free: 191450 MB
node 1 cpus: 1 3 4 7 10 11 25 27 28 31 34 35
node 1 size: 193533 MB
node 1 free: 193058 MB
node 2 cpus: 12 15 18 19 21 22 36 39 42 43 45 46
node 2 size: 193533 MB
node 2 free: 193096 MB
node 3 cpus: 13 14 16 17 20 23 37 38 40 41 44 47
node 3 size: 193503 MB
node 3 free: 193055 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:      791194000 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Apr 13 19:25

SPEC is set to: /spec2017\_19u5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	932G	19G	914G	2%	/

```
From /sys/devices/virtual/dmi/id
  BIOS:      American Megatrends Inc. 6102 12/19/2019
  Vendor:    ASUSTeK COMPUTER INC.
  Product:   Z11PG-D24 Series
  Product Family: Server
  Serial:    System Serial Number
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

```
(End of data from sysinfo program)
The build_date 20190815 in sw_compiler is correct for the IC compiler.
The build_date in Compiler Version Notes is incorrect.
```

### Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
=====
```

```
Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
  Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

### Compiler Version Notes (Continued)

```

C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)

```

```

-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C      | 502.gcc_r(peak)
-----

```

```

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
-----

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C      | 502.gcc_r(peak)
-----

```

```

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

## Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto  
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto -mfpmath=sse  
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(3.60 GHz, Intel Xeon Gold 6256)

SPECrate®2017\_int\_base = 214

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.html>

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-13 13:27:55-0400.

Report generated on 2021-01-04 18:00:47 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.