



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

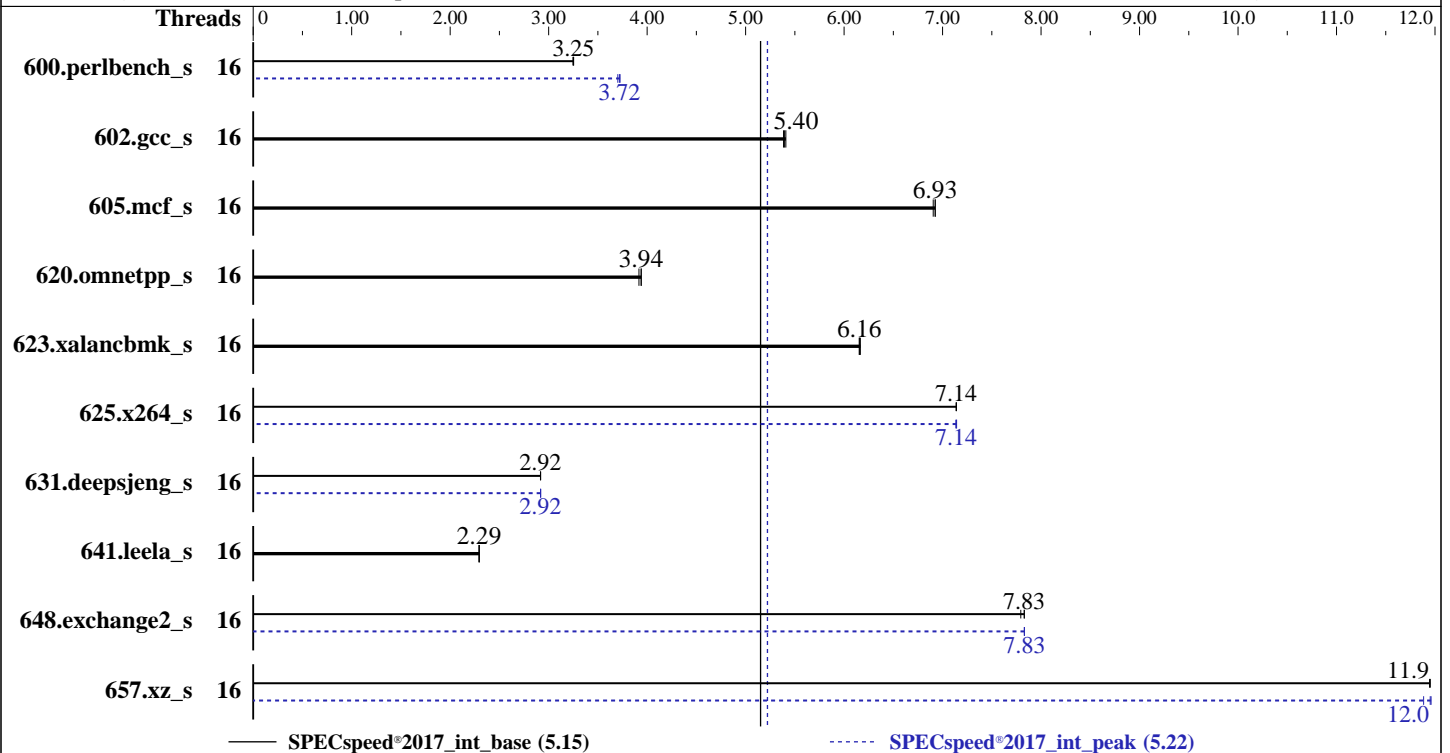

Hardware

CPU Name: Intel Xeon Bronze 3206R
 Max MHz: 1900
 Nominal: 1900
 Enabled: 16 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2133)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: Yes
 Firmware: Version 6102 released Dec-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	546	3.25	546	3.25	547	3.25	16	476	3.73	479	3.70	477	3.72
602.gcc_s	16	738	5.40	736	5.41	739	5.39	16	738	5.40	736	5.41	739	5.39
605.mcf_s	16	682	6.93	682	6.93	684	6.91	16	682	6.93	682	6.93	684	6.91
620.omnetpp_s	16	414	3.94	416	3.92	414	3.94	16	414	3.94	416	3.92	414	3.94
623.xalancbmk_s	16	230	6.15	230	6.17	230	6.16	16	230	6.15	230	6.17	230	6.16
625.x264_s	16	247	7.14	247	7.14	247	7.14	16	247	7.14	247	7.14	247	7.14
631.deepsjeng_s	16	491	2.92	491	2.92	491	2.92	16	491	2.92	491	2.92	491	2.92
641.leela_s	16	743	2.30	744	2.29	744	2.29	16	743	2.30	744	2.29	744	2.29
648.exchange2_s	16	375	7.83	376	7.83	377	7.79	16	375	7.83	375	7.83	375	7.83
657.xz_s	16	517	12.0	518	11.9	517	11.9	16	517	12.0	520	11.9	517	12.0

SPECspeed®2017_int_base = **5.15**

SPECspeed®2017_int_peak = **5.22**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/19u4/lib/intel64:/19u4/je5.0.1-64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

The jemalloc library was

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

General Notes (Continued)

configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
Patrol Scrub = Disabled
VT-d = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
SR-IOV Support = Disabled
CSM Support = Disabled
Engine Boost = Level3(Max)
LLC dead line allc = Disabled

sysinfo program /19u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-628j Wed May 20 06:08:51 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 48 bits virtual
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 8

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                    85
Model name:               Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping:                 7
CPU MHz:                  1900.000
CPU max MHz:              1900.0000
CPU min MHz:              1000.0000
BogoMIPS:                 3800.00
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 11264K
NUMA node0 CPU(s):       0-7
NUMA node1 CPU(s):       8-15

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke
avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 385616 MB
node 0 free: 384997 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 387040 MB
node 1 free: 385311 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: May-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      791201012 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 May 19 17:43

SPEC is set to: /19u4

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   932G  19G  913G   3% /
```

From /sys/devices/virtual/dmi/id

```
BIOS:      American Megatrends Inc. 6102 12/19/2019
Vendor:    ASUSTeK COMPUTER INC.
Product:   Z11PG-D24 Series
Product Family: Server
Serial:    System Serial Number
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

```
625.x264_s: -w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

```
631.deepsjeng_s: -w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017_int_base = 5.15

SPECspeed®2017_int_peak = 5.22

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-19 18:08:50-0400.

Report generated on 2020-07-21 13:15:19 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-21.