



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

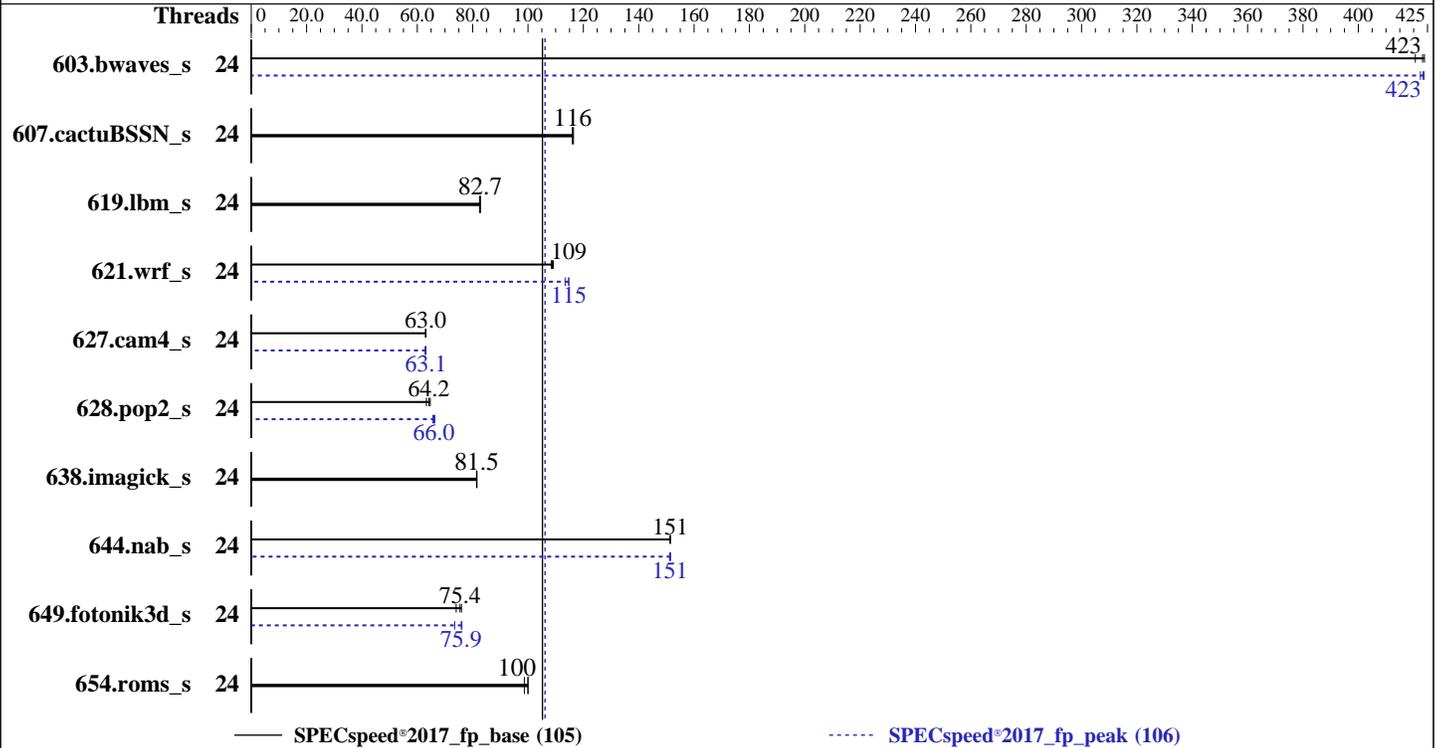

### Hardware

CPU Name: Intel Xeon Silver 4214R  
 Max MHz: 3500  
 Nominal: 2400  
 Enabled: 24 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler Build 20190815 for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler Build 20190815 for Linux  
 Parallel: Yes  
 Firmware: Version 6102 released Dec-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	140	421	<b><u>139</u></b>	<b><u>423</u></b>	139	424	24	<b><u>139</u></b>	<b><u>423</u></b>	140	422	139	424
607.cactuBSSN_s	24	<b><u>143</u></b>	<b><u>116</u></b>	144	116	143	116	24	<b><u>143</u></b>	<b><u>116</u></b>	144	116	143	116
619.lbm_s	24	<b><u>63.3</u></b>	<b><u>82.7</u></b>	63.5	82.5	63.3	82.8	24	<b><u>63.3</u></b>	<b><u>82.7</u></b>	63.5	82.5	63.3	82.8
621.wrf_s	24	122	108	<b><u>122</u></b>	<b><u>109</u></b>	121	109	24	115	115	<b><u>115</u></b>	<b><u>115</u></b>	117	113
627.cam4_s	24	141	62.9	<b><u>141</u></b>	<b><u>63.0</u></b>	140	63.1	24	140	63.1	141	62.8	<b><u>140</u></b>	<b><u>63.1</u></b>
628.pop2_s	24	188	63.3	184	64.7	<b><u>185</u></b>	<b><u>64.2</u></b>	24	179	66.3	181	65.6	<b><u>180</u></b>	<b><u>66.0</u></b>
638.imagick_s	24	177	81.4	177	81.6	<b><u>177</u></b>	<b><u>81.5</u></b>	24	177	81.4	177	81.6	<b><u>177</u></b>	<b><u>81.5</u></b>
644.nab_s	24	115	151	<b><u>115</u></b>	<b><u>151</u></b>	115	151	24	116	151	<b><u>115</u></b>	<b><u>151</u></b>	115	152
649.fotonik3d_s	24	123	74.0	120	76.0	<b><u>121</u></b>	<b><u>75.4</u></b>	24	120	76.1	<b><u>120</u></b>	<b><u>75.9</u></b>	124	73.5
654.roms_s	24	160	98.7	157	100	<b><u>157</u></b>	<b><u>100</u></b>	24	160	98.7	157	100	<b><u>157</u></b>	<b><u>100</u></b>

SPECspeed®2017\_fp\_base = **105**

SPECspeed®2017\_fp\_peak = **106**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/spec2017\_19u5/lib/intel64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

### Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

HyperThreading = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = performance

SR-IOV Support = Disabled

Engine Boost = Level3(Max)

LLC dead line allc = Disabled

CSM Support = Disabled

sysinfo program /spec2017\_19u5/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-628j Mon May 11 19:26:59 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 46 bits physical, 48 bits virtual

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 1

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4214R CPU @ 2.40GHz

Stepping: 7

CPU MHz: 2400.000

CPU max MHz: 3500.0000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

### Platform Notes (Continued)

```

CPU min MHz:          1000.0000
BogoMIPS:             4800.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             16896K
NUMA node0 CPU(s):   0-11
NUMA node1 CPU(s):   12-23
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 385616 MB
node 0 free: 385039 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 387039 MB
node 1 free: 386708 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:          791199472 kB
HugePages_Total:    0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

### Platform Notes (Continued)

```

VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:         Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling

```

run-level 3 May 11 19:26

SPEC is set to: /spec2017\_19u5

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   932G  19G  913G   3% /

```

From /sys/devices/virtual/dmi/id

```

BIOS:      American Megatrends Inc. 6102 12/19/2019
Vendor:    ASUSTeK COMPUTER INC.
Product:   Z11PG-D24 Series
Product Family: Server
Serial:    System Serial Number

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

### Compiler Version Notes

```
=====
C                | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                  | 644.nab_s(base, peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Sep-2019

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-m64 -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4214R)

SPECspeed®2017\_fp\_base = 105

SPECspeed®2017\_fp\_peak = 106

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Sep-2019

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only  
-no-prec-div -qopt-mem-layout-trans=4  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

627.cam4\_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-11 07:26:58-0400.

Report generated on 2020-07-21 13:15:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-21.