



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55


Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Apr-2020

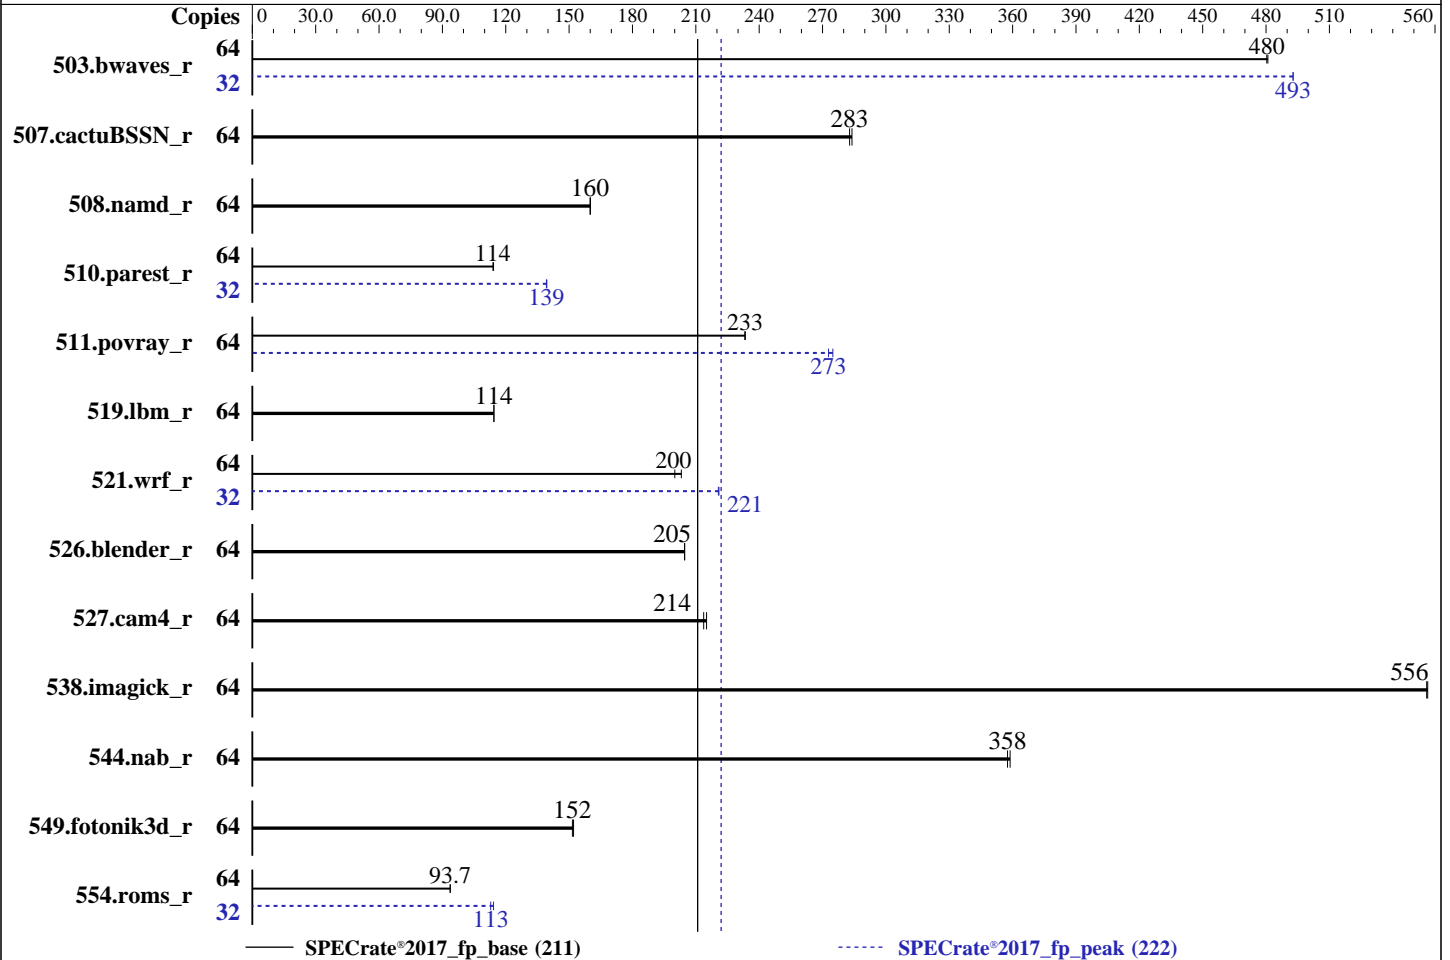

### Hardware

CPU Name: Intel Xeon Gold 6242  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1  
 kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.7.1 released Feb-2020  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2020  
Hardware Availability: Apr-2019  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1335	481	<b><u>1336</u></b>	<b><u>480</u></b>			32	<b><u>651</u></b>	<b><u>493</u></b>	651	493		
507.cactuBSSN_r	64	<b><u>286</u></b>	<b><u>283</u></b>	285	284			64	<b><u>286</u></b>	<b><u>283</u></b>	285	284		
508.namd_r	64	380	160	<b><u>380</u></b>	<b><u>160</u></b>			64	380	160	<b><u>380</u></b>	<b><u>160</u></b>		
510.parest_r	64	<b><u>1469</u></b>	<b><u>114</u></b>	1466	114			32	<b><u>601</u></b>	<b><u>139</u></b>	600	139		
511.povray_r	64	<b><u>641</u></b>	<b><u>233</u></b>	640	233			64	<b><u>548</u></b>	<b><u>273</u></b>	544	275		
519.lbm_r	64	590	114	<b><u>590</u></b>	<b><u>114</u></b>			64	590	114	<b><u>590</u></b>	<b><u>114</u></b>		
521.wrf_r	64	706	203	<b><u>717</u></b>	<b><u>200</u></b>			32	<b><u>325</u></b>	<b><u>221</u></b>	324	221		
526.blender_r	64	476	205	<b><u>476</u></b>	<b><u>205</u></b>			64	476	205	<b><u>476</u></b>	<b><u>205</u></b>		
527.cam4_r	64	520	215	<b><u>524</u></b>	<b><u>214</u></b>			64	520	215	<b><u>524</u></b>	<b><u>214</u></b>		
538.imagick_r	64	286	557	<b><u>286</u></b>	<b><u>556</u></b>			64	286	557	<b><u>286</u></b>	<b><u>556</u></b>		
544.nab_r	64	300	359	<b><u>301</u></b>	<b><u>358</u></b>			64	300	359	<b><u>301</u></b>	<b><u>358</u></b>		
549.fotonik3d_r	64	1640	152	<b><u>1646</u></b>	<b><u>152</u></b>			64	1640	152	<b><u>1646</u></b>	<b><u>152</u></b>		
554.roms_r	64	<b><u>1086</u></b>	<b><u>93.7</u></b>	1085	93.7			32	445	114	<b><u>451</u></b>	<b><u>113</u></b>		

SPECrate®2017\_fp\_base = 211

SPECrate®2017\_fp\_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/dev/shm/cpu2017-ic19.1u1/lib/intel64:/dev/shm/cpu2017-ic19.1u1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

- Sub NUMA Cluster enabled
- Virtualization Technology disabled
- System Profile set to Custom
- CPU Performance set to Maximum Performance
- C States set to Autonomous
- C1E disabled
- Uncore Frequency set to Dynamic
- Energy Efficiency Policy set to Performance
- Memory Patrol Scrub set to standard
- Logical Processor enabled
- CPU Interconnect Bus Link Power Management disabled
- PCI ASPM L1 Link Power Management disabled
- UPI Prefetch enabled
- LLC Prefetch disabled
- Dead Line LLC Alloc enabled
- Directory AtoS disabled

Sysinfo program /dev/shm/cpu2017-ic19.lul/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on localhost.localdomain Fri Jun 5 16:07:02 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6242 CPU @ 2.80GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6242 CPU @ 2.80GHz

Stepping: 6

CPU MHz: 3564.535

CPU max MHz: 3900.0000

CPU min MHz: 1200.0000

BogoMIPS: 5600.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 22528K

NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60

NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61

NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62

NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin ssbd mba ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bml hle avx2 smep bmi2 erms invpcid rtm

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
node 0 size: 192048 MB
node 0 free: 182593 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61
node 1 size: 193532 MB
node 1 free: 193189 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62
node 2 size: 193532 MB
node 2 free: 192488 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63
node 3 size: 193532 MB
node 3 free: 193227 MB
node distances:
node  0  1  2  3
 0:  10  21  11  21
 1:  21  10  21  11
 2:  11  21  10  21
 3:  21  11  21  10
```

```
From /proc/meminfo
MemTotal: 791188960 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.1:ga

uname -a:

Linux localhost.localdomain 4.18.0-147.el8.x86\_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jun 5 10:50

SPEC is set to: /dev/shm/cpu2017-ic19.1ul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	378G	4.2G	374G	2%	/dev/shm

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.7.1 02/14/2020  
 Vendor: Dell Inc.  
 Product: PowerEdge MX740c  
 Product Family: PowerEdge  
 Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

21x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
 1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
 2x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

| 544.nab\_r(base, peak)

-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran, C | 521.wrf\_r(peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECrate®2017\_fp\_base = 211**

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

**SPECrate®2017\_fp\_peak = 222**

**CPU2017 License:** 55

**Test Date:** Jun-2020

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Apr-2019

**Tested by:** Dell Inc.

**Software Availability:** Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: basepeak = yes
```

```
510.parest_r: -m64 -qnextgen
```

```
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 211

PowerEdge MX740c (Intel Xeon Gold 6242, 2.80GHz)

SPECrate®2017\_fp\_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-05 16:07:02-0400.  
Report generated on 2020-07-07 14:30:42 by CPU2017 PDF formatter v6255.  
Originally published on 2020-07-07.