



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

## SPECrate®2017\_fp\_base = 200

## H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

## SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066


Test Date: Jun-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

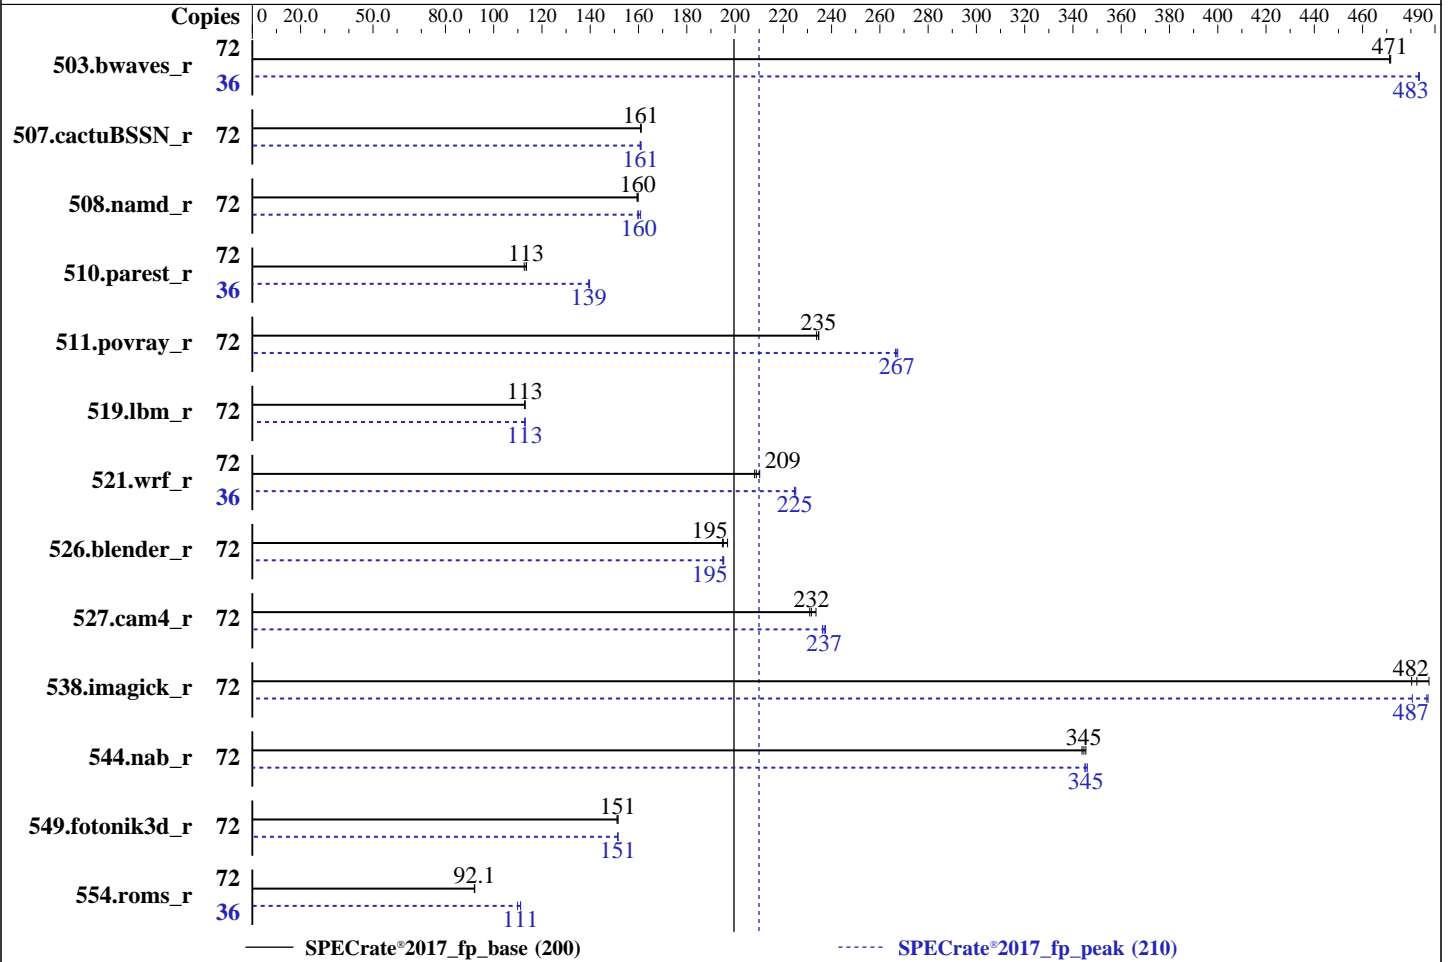

### Hardware

CPU Name: Intel Xeon Gold 6240  
 Max MHz: 3900  
 Nominal: 2600  
 Enabled: 36 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933V-R, running at 2933)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.00.42 released Jun-2020 BIOS  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Date: Jun-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	1532	471	1531	472	<u>1532</u>	<u>471</u>	36	747	483	<u>747</u>	<u>483</u>	747	483
507.cactuBSSN_r	72	<b>566</b>	<b>161</b>	566	161	567	161	72	566	161	567	161	<b>567</b>	<b>161</b>
508.namd_r	72	<u>428</u>	<u>160</u>	429	159	428	160	72	428	160	<u>427</u>	<u>160</u>	425	161
510.parest_r	72	<b>1660</b>	<b>113</b>	1658	114	1672	113	36	675	139	<u>675</u>	<u>139</u>	674	140
511.povray_r	72	<u>717</u>	<b>235</b>	719	234	716	235	72	<b>630</b>	<b>267</b>	629	267	631	266
519.lbm_r	72	672	113	672	113	<b>672</b>	<b>113</b>	72	672	113	672	113	<b>672</b>	<b>113</b>
521.wrf_r	72	775	208	767	210	<b>772</b>	<b>209</b>	36	<b>359</b>	<b>225</b>	359	225	358	225
526.blender_r	72	557	197	563	195	<b>562</b>	<b>195</b>	72	562	195	<u>562</u>	<u>195</u>	561	195
527.cam4_r	72	545	231	539	234	<b>544</b>	<b>232</b>	72	530	237	533	236	<b>532</b>	<b>237</b>
538.imagick_r	72	367	488	<b>371</b>	<b>482</b>	373	480	72	368	487	373	481	<b>368</b>	<b>487</b>
544.nab_r	72	<b>352</b>	<b>345</b>	351	345	352	344	72	<b>351</b>	<b>345</b>	351	345	350	346
549.fotonik3d_r	72	<b>1853</b>	<b>151</b>	1857	151	1852	151	72	1854	151	<b>1853</b>	<b>151</b>	1852	151
554.roms_r	72	1244	92.0	1241	92.2	<b>1243</b>	<b>92.1</b>	36	<b>515</b>	<b>111</b>	515	111	520	110

SPECrate®2017\_fp\_base = 200

SPECrate®2017\_fp\_peak = 210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Set SNC to Enabled  
Set IMC Interleaving to 1-way Interleave  
Set XPT Prefetcher to Enabled

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-wax3 Mon Jun 29 19:04:37 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 72
On-line CPU(s) list: 0-71
Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Date: Jun-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Platform Notes (Continued)

```

CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
Stepping:             7
CPU MHz:              2600.000
CPU max MHz:          3900.0000
CPU min MHz:          1000.0000
BogoMIPS:             5200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             25344K
NUMA node0 CPU(s):   0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s):   3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s):   18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s):   21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 95257 MB
node 0 free: 82830 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 96754 MB
node 1 free: 89002 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 96754 MB
node 2 free: 89076 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 96520 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## Platform Notes (Continued)

node 3 free: 89199 MB

node distances:

```

node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394533904 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP4

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

uname -a:

```

Linux linux-wax3 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted
Speculation, IBPB, IBRS_FW

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## Platform Notes (Continued)

run-level 3 Jun 29 10:09 last=5

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/md126p1	btrfs	401G	42G	359G	11%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 2.00.42 06/22/2020

Vendor: New H3C Technologies Co., Ltd.

Product: UniServer R4900 G3

Product Family: Rack

Serial: 210231A6T3H19B000065

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933

12x NO DIMM NO DIMM

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
 =====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
 | 554.roms\_r(base, peak)  
 =====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
 =====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Jun-2020

**Hardware Availability:** Mar-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nonstandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_fp\_base = 200

H3C UniServer R4900 G3 (Intel Xeon Gold 6240)

SPECrate®2017\_fp\_peak = 210

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Jun-2020

**Hardware Availability:** Mar-2019

**Software Availability:** May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevE.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevE.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-29 07:04:37-0400.

Report generated on 2020-07-21 13:19:27 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-21.