



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

### H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066


Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

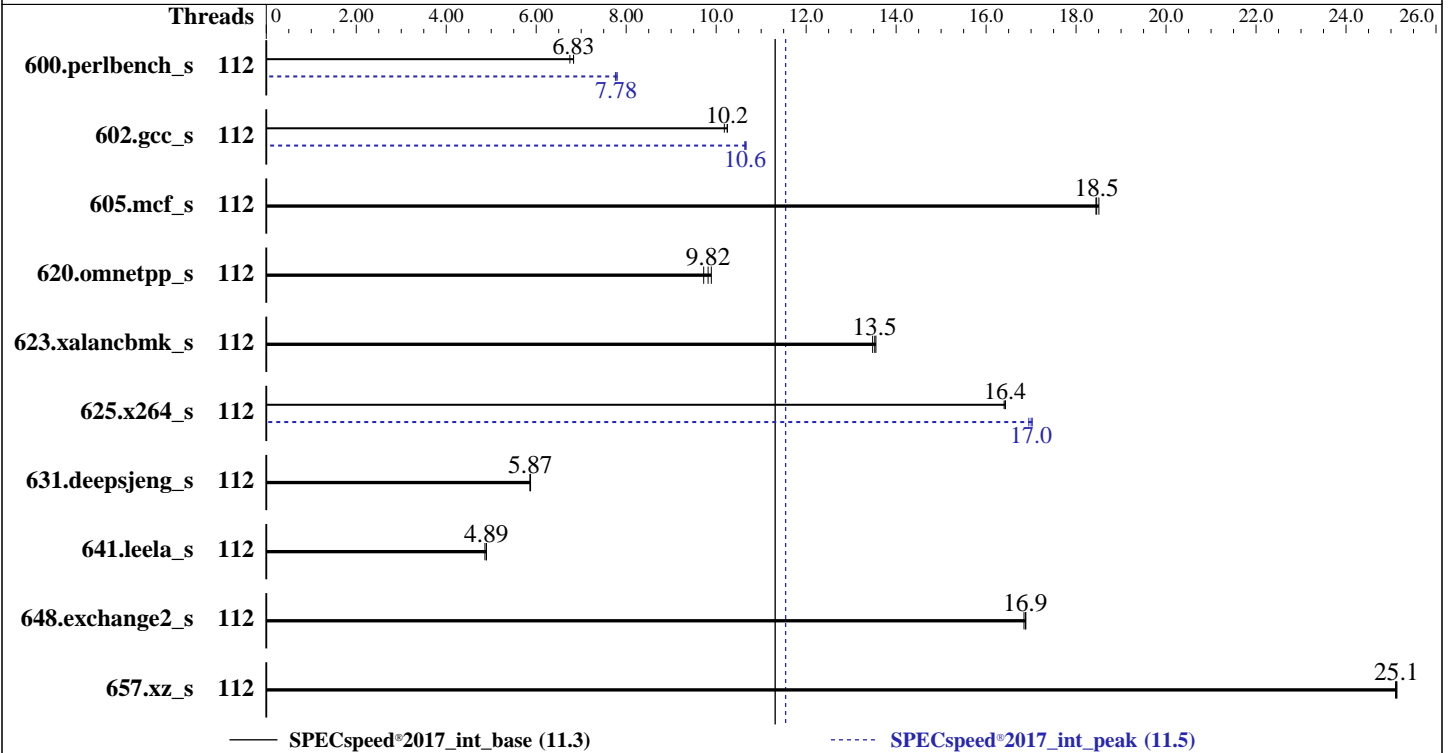

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 112 cores, 4 chips  
 Orderable: 1,2,3,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa)  
 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
 Compiler Build 20200306 for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran  
 Compiler Build 20200306 for Linux  
 Parallel: Yes  
 Firmware: Version 2.00.33 released Aug-2019 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Results Table

| Benchmark       | Base    |            |             |            |             |            | Peak        |         |            |             |            |             |            |             |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 600.perlbench_s | 112     | <b>260</b> | <b>6.83</b> | 263        | 6.75        | 260        | 6.83        | 112     | 228        | 7.80        | <b>228</b> | <b>7.78</b> | 229        | 7.76        |
| 602.gcc_s       | 112     | <b>389</b> | <b>10.2</b> | 389        | 10.2        | 391        | 10.2        | 112     | 373        | 10.7        | 374        | 10.6        | <b>374</b> | <b>10.6</b> |
| 605.mcf_s       | 112     | 255        | 18.5        | <b>256</b> | <b>18.5</b> | 256        | 18.4        | 112     | 255        | 18.5        | <b>256</b> | <b>18.5</b> | 256        | 18.4        |
| 620.omnetpp_s   | 112     | <b>166</b> | <b>9.82</b> | 165        | 9.89        | 168        | 9.72        | 112     | <b>166</b> | <b>9.82</b> | 165        | 9.89        | 168        | 9.72        |
| 623.xalancbmk_s | 112     | <b>105</b> | <b>13.5</b> | 105        | 13.6        | 105        | 13.5        | 112     | <b>105</b> | <b>13.5</b> | 105        | 13.6        | 105        | 13.5        |
| 625.x264_s      | 112     | 107        | 16.4        | 108        | 16.4        | <b>107</b> | <b>16.4</b> | 112     | 104        | 17.0        | 104        | 16.9        | <b>104</b> | <b>17.0</b> |
| 631.deepsjeng_s | 112     | 244        | 5.87        | <b>244</b> | <b>5.87</b> | 245        | 5.86        | 112     | 244        | 5.87        | <b>244</b> | <b>5.87</b> | 245        | 5.86        |
| 641.leela_s     | 112     | 351        | 4.86        | <b>349</b> | <b>4.89</b> | 349        | 4.89        | 112     | 351        | 4.86        | <b>349</b> | <b>4.89</b> | 349        | 4.89        |
| 648.exchange2_s | 112     | <b>174</b> | <b>16.9</b> | 175        | 16.8        | 174        | 16.9        | 112     | <b>174</b> | <b>16.9</b> | 175        | 16.8        | 174        | 16.9        |
| 657.xz_s        | 112     | 246        | 25.1        | <b>246</b> | <b>25.1</b> | 246        | 25.1        | 112     | 246        | 25.1        | <b>246</b> | <b>25.1</b> | 246        | 25.1        |

SPECspeed®2017\_int\_base = **11.3**

SPECspeed®2017\_int\_peak = **11.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Oct-2020  
**Hardware Availability:** Jun-2019  
**Software Availability:** Apr-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Set Hyper Threading to Disabled  
Set Patrol Scrub to Disabled  
Set IMC Interleaving to 2-way Interleave

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Fri Oct 30 16:03:55 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz  
4 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 28  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 112

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Date: Oct-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-111
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping: 6
CPU MHz: 1051.489
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 95040 MB
node 0 free: 94591 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

```

node 1 size: 96761 MB
node 1 free: 96592 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 96761 MB
node 2 free: 95236 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 96761 MB
node 3 free: 96469 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      394573112 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:          KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): via prctl and seccomp  
Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

tsx\_async\_abort: Vulnerable: Clear CPU buffers attempted, no microcode; SMT disabled

run-level 3 Oct 30 16:02

SPEC is set to: /home/speccpu

| Filesystem            | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-home | xfs  | 839G | 141G | 698G  | 17%  | /home      |

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 2.00.33 08/22/2019

Vendor: New H3C Technologies Co., Ltd.

Product: H3C UniServer R6900 G3

Product Family: Rack

Serial: 210235A3T0H204000004

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933

24x NO DIMM NO DIMM

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C          | 600.perlbench_s(peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

**CPU2017 License:** 9066  
**Test Sponsor:** New H3C Technologies Co., Ltd.  
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Oct-2020  
**Hardware Availability:** Jun-2019  
**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
| 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 600.perlbench\_s(peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries
```





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64(*) -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

(\*) Indicates a portability flag that was found in a non-portability variable.

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -m64 -qnextgen -std=c11 -fuse-ld=gold
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.3

H3C UniServer R6900 G3 (Intel Xeon Platinum 8280)

SPECspeed®2017\_int\_peak = 11.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2020

Hardware Availability: Jun-2019

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.4-CLX-RevB.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.4-CLX-RevB.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-30 04:03:55-0400.

Report generated on 2020-11-25 10:28:42 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.