



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

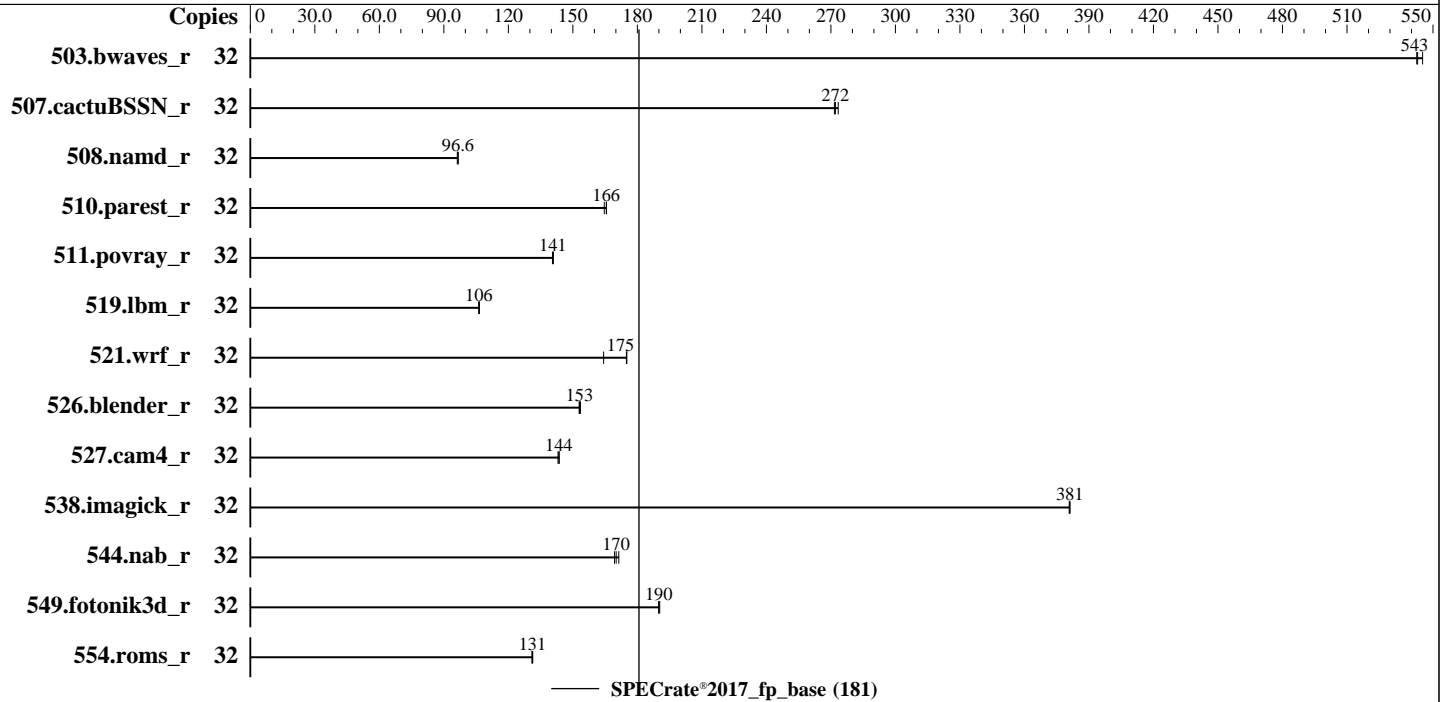

Hardware

CPU Name: AMD EPYC 7262
 Max MHz: 3400
 Nominal: 3200
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB per core
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-L)
 Storage: 1 x PCIe SSD, 2TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 kernel version 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Fujitsu BIOS Version R07.104. Released Oct-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	592	542	589	545	591	543							
507.cactuBSSN_r	32	148	273	149	272	149	272							
508.namd_r	32	314	96.7	315	96.6	316	96.3							
510.parest_r	32	506	166	505	166	509	165							
511.povray_r	32	532	141	530	141	531	141							
519.lbm_r	32	317	106	317	107	317	106							
521.wrf_r	32	409	175	410	175	436	164							
526.blender_r	32	319	153	318	153	317	154							
527.cam4_r	32	390	144	391	143	390	144							
538.imagick_r	32	209	381	209	381	209	381							
544.nab_r	32	318	169	314	171	317	170							
549.fotonik3d_r	32	657	190	655	190	656	190							
554.roms_r	32	387	131	387	131	388	131							

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/benchmark/speccpu/amd_rate_aocc200_rome_C_lib/64;/home/benchmark/speccpu/amd_rate_aocc200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS configuration:

cTDP = 180

Determinism Slider = Power

Package Power Limit = 180

SVM Mode = Disabled

Sysinfo program /home/benchmark/speccpu/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost Thu Nov 5 00:46:24 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Platform Notes (Continued)

From /proc/cpuinfo

model name : AMD EPYC 7262 8-Core Processor

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 4 8 12 16 20 24 28

physical 1: cores 0 4 8 12 16 20 24 28

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7262 8-Core Processor
Stepping:               0
CPU MHz:                1796.321
CPU max MHz:           3200.0000
CPU min MHz:           1500.0000
BogoMIPS:               6388.16
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0,1,16,17
NUMA node1 CPU(s):     2,3,18,19
NUMA node2 CPU(s):     4,5,20,21
NUMA node3 CPU(s):     6,7,22,23
NUMA node4 CPU(s):     8,9,24,25
NUMA node5 CPU(s):     10,11,26,27
NUMA node6 CPU(s):     12,13,28,29
NUMA node7 CPU(s):     14,15,30,31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Platform Notes (Continued)

```

constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 16 17

node 0 size: 64249 MB

node 0 free: 63831 MB

node 1 cpus: 2 3 18 19

node 1 size: 64509 MB

node 1 free: 64408 MB

node 2 cpus: 4 5 20 21

node 2 size: 64509 MB

node 2 free: 64385 MB

node 3 cpus: 6 7 22 23

node 3 size: 64497 MB

node 3 free: 64376 MB

node 4 cpus: 8 9 24 25

node 4 size: 64509 MB

node 4 free: 64386 MB

node 5 cpus: 10 11 26 27

node 5 size: 64509 MB

node 5 free: 64412 MB

node 6 cpus: 12 13 28 29

node 6 size: 64509 MB

node 6 free: 64398 MB

node 7 cpus: 14 15 30 31

node 7 size: 64236 MB

node 7 free: 64132 MB

node distances:

node 0 1 2 3 4 5 6 7

0: 10 12 12 12 32 32 32 32

1: 12 10 12 12 32 32 32 32

2: 12 12 10 12 32 32 32 32

3: 12 12 12 10 32 32 32 32

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Platform Notes (Continued)

```

4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      527904492 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

uname -a:

```

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020
(720aeba/lp-1a956f1) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:                               Not affected
CVE-2018-3620 (L1 Terminal Fault):           Not affected
Microarchitectural Data Sampling:           Not affected
CVE-2017-5754 (Meltdown):                   Not affected
CVE-2018-3639 (Speculative Store Bypass):    Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):           Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):           Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
srbds:                                       Not affected
tsx_async_abort:                             Not affected

```

run-level 3 Nov 5 00:38

SPEC is set to: /home/benchmark/speccpu

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/nvme1n1p3  xfs      1.3T  6.0G  1.3T   1% /home

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
  BIOS:      American Megatrends Inc. V7.104 08/20/2020
  Vendor:    FUJITSU
  Product:   PRIMERGY GX2460 M1
  Product Family: empty
  Serial:    MACK900001
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  16x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++ | 508.namd_r(base) 510.parest_r(base)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++, C | 511.povray_r(base) 526.blender_r(base)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
C++, C, Fortran | 507.cactuBSSN_r(base)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY GX2460 M1, AMD EPYC 7262,
3.20 GHz

SPECrate®2017_fp_base = 181

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Oct-2019

Software Availability: Oct-2020

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-04 10:46:23-0500.

Report generated on 2020-12-08 15:20:23 by CPU2017 PDF formatter v6255.

Originally published on 2020-12-08.