



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082


Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

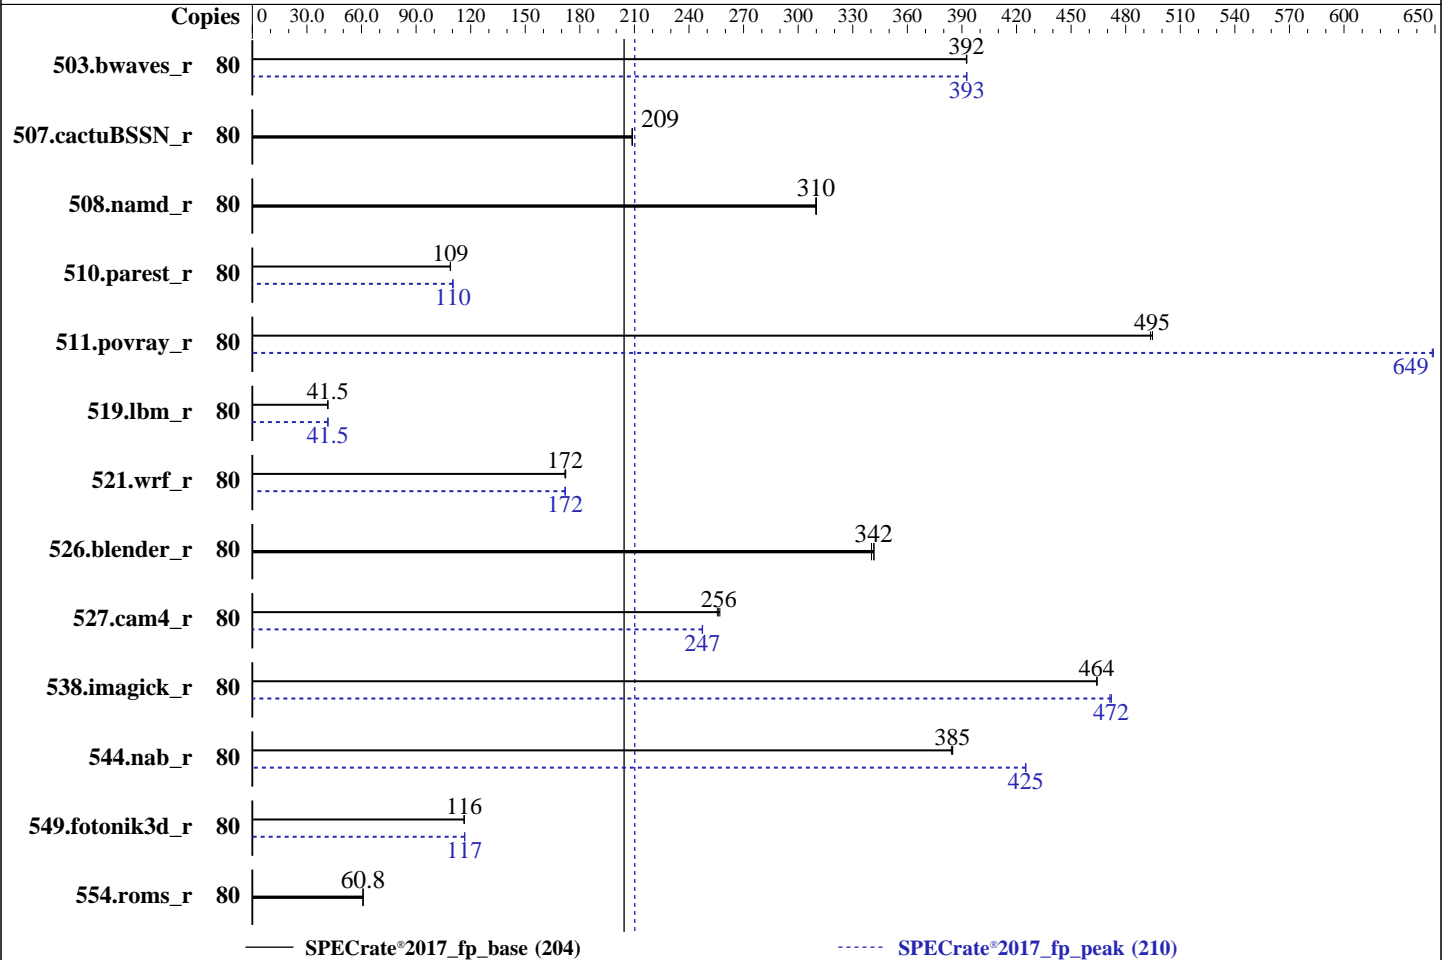

Hardware

CPU Name: Ampere Altra Q80-30
 Max MHz: 3000
 Nominal: 2800
 Enabled: 80 cores, 1 chip
 Orderable: 1 chips
 Cache L1: 64 KB I + 64 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 811 GB, NVME, M.2, PCIe Gen3
 Other: None

Software

OS: CentOS Linux release 8.3.2011
 4.18.0-240.1.1.el8_3.aarch64
 Compiler: C/C++/Fortran: Version 10.2.1 of Ampere GCC
 Parallel: No
 Firmware: Version F05 released Jan-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: Jemalloc memory allocator library v5.2.1
 Power Management: OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	2044	392	2044	392	2043	393	80	2043	393	2043	393	2044	393
507.cactuBSSN_r	80	485	209	485	209	485	209	80	485	209	485	209	485	209
508.namd_r	80	245	310	245	310	245	310	80	245	310	245	310	245	310
510.parest_r	80	1922	109	1924	109	1921	109	80	1898	110	1899	110	1899	110
511.povray_r	80	378	495	378	494	378	495	80	288	649	288	648	288	649
519.lbm_r	80	2033	41.5	2031	41.5	2034	41.5	80	2030	41.5	2030	41.5	2030	41.5
521.wrf_r	80	1040	172	1042	172	1043	172	80	1042	172	1042	172	1043	172
526.blender_r	80	357	342	357	342	358	340	80	357	342	357	342	358	340
527.cam4_r	80	547	256	544	257	546	256	80	565	247	566	247	566	247
538.imagick_r	80	429	464	429	464	429	464	80	422	471	422	472	421	472
544.nab_r	80	350	385	350	385	350	384	80	317	425	317	425	317	425
549.fotonik3d_r	80	2678	116	2677	116	2677	116	80	2671	117	2672	117	2672	117
554.roms_r	80	2087	60.9	2089	60.8	2089	60.8	80	2087	60.9	2089	60.8	2089	60.8

SPECrate®2017_fp_base = 204

SPECrate®2017_fp_peak = 210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

Binaries were compiled on a system with 2x Ampere Altra Q80-30 CPU chips + 256 GB Memory using CentOS 8.3

Ampere GCC 10.2.1 is available via <https://github.com/AmpereComputing/ampere-gcc/releases>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
Set dirty_ratio=8 to limit dirty cache to 8% of memory
i.e. echo 8 | sudo tee /proc/sys/vm/dirty_ratio
Set swappiness=1 to swap only if necessary
i.e. echo 1 | sudo tee /proc/sys/vm/swappiness
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
i.e. echo 1 | sudo tee /proc/sys/vm/zone_reclaim_mode
Set drop_caches=3 to reset caches before invoking runcpu
i.e. echo 3 | sudo tee /proc/sys/vm/drop_caches
Set numa_balancing=0 to disable automatic numa balancing

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Operating System Notes (Continued)

```
i.e. echo 0 | sudo tee /proc/sys/kernel/numa_balancing
Switch off all ktune and tuned settings
i.e. sudo tuned-adm off
Transparent huge pages set to 'never'
i.e. sudo bash -c "echo never > /sys/kernel/mm/transparent_hugepage/enabled"

runcpu command invoked through numactl i.e.
numactl --interleave=0-3 runcpu
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/ampctest/ampere_spec2017/jemalloc/install/lib:/home/ampctest/ampere_spec2017/gcc/install/lib64:/home/ampctest/ampere_spec2017/gcc/install/lib:/home/ampere_spec2017/gcc/install/lib64:/home/ampere_spec2017/jemalloc/install/lib:"
```

General Notes

Jemalloc v5.2.1 is available via <https://github.com/jemalloc/jemalloc/releases/download/5.2.1/jemalloc-5.2.1.tar.bz2>
It was built on CentOS 8.3 using Version 10.2.1 of Ampere GCC with configure options `--prefix=/home/ampctest/jemalloc/install --with-lg-quantum=3`

- NA: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
Chipset > ANC Mode > Quadrant

```
Sysinfo program /home/ampere_spec2017/spec2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Mon Feb 22 23:23:58 2021
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Platform Notes (Continued)

From /proc/cpuinfo

```

*
* Did not identify cpu model.  If you would
* like to write your own sysinfo program, see
* www.spec.org/cpu2017/config.html#sysinfo
*
*
* 0 "physical id" tags found.  Perhaps this is an older system,
* or a virtualized system.  Not attempting to guess how to
* count chips/cores for this system.
*
    80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)

```

From lscpu:

```

Architecture:      aarch64
Byte Order:        Little Endian
CPU(s):            80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
Core(s) per socket: 80
Socket(s):         1
NUMA node(s):     1
Vendor ID:         ARM
Model:             1
Stepping:          r3p1
CPU max MHz:      3000.0000
CPU min MHz:      1000.0000
BogoMIPS:          50.00
L1d cache:        64K
L1i cache:        64K
L2 cache:         1024K
NUMA node0 CPU(s): 0-79
Flags:             fp asimd evtstrm aes pmull sha1 sha2 crc32 atomics fphp asimdhp
cpuid asimdrdm lrcpc dcpop asimddp ssbs

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 0 size: 260857 MB
node 0 free: 258481 MB
node distances:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Platform Notes (Continued)

```
node    0
0:     10
```

```
From /proc/meminfo
MemTotal:      267117952 kB
HugePages_Total:      0
Hugepagesize:    524288 kB
```

```
/sbin/tuned-adm active
No current active profile.
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
CentOS Linux release 8.3.2011
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.3.2011
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.3.2011
system-release: CentOS Linux release 8.3.2011
system-release-cpe: cpe:/o:centos:centos:8
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.1.1.el8_3.aarch64 #1 SMP Thu Nov 19 22:13:39
UTC 2020 aarch64 aarch64 aarch64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer
sanitization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):	Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Feb 22 22:47

SPEC is set to: /home/ampere_spec2017/spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	811G	119G	692G	15%	/home

From /sys/devices/virtual/dmi/id

```
Vendor:          GIGABYTE
Product:         E252-P30-00
Product Family: Server
Serial:          01234567890123456789AB
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
1x Array 1 Manufacturer 10 Array 1 Part Number 10
1x Array 1 Manufacturer 12 Array 1 Part Number 12
1x Array 1 Manufacturer 14 Array 1 Part Number 14
1x Array 1 Manufacturer 16 Array 1 Part Number 16
1x Array 1 Manufacturer 2 Array 1 Part Number 2
1x Array 1 Manufacturer 4 Array 1 Part Number 4
1x Array 1 Manufacturer 6 Array 1 Part Number 6
1x Array 1 Manufacturer 8 Array 1 Part Number 8
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

BIOS:

```
BIOS Vendor:      GIGABYTE
BIOS Version:     F05
BIOS Date:        01/19/2021
BIOS Revision:    5.15
Firmware Revision: 1.3
```

(End of data from sysinfo program)

Compiler Version Notes

```
-----
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

```
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

```
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

```
=====  
C++, C, Fortran | 507.cactuBSSN_r(base, peak)  
=====
```

```
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

```
=====  
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)  
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

| 554.roms_r(base, peak)

GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using both C and C++:

g++ gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LINUX -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-mabi=lp64 -std=c99 -L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-strict-aliasing -ljemalloc

```

C++ benchmarks:

```

-mabi=lp64 -std=c++03 -L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -ljemalloc

```

Fortran benchmarks:

```

-mabi=lp64 -L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-stack-arrays -ljemalloc

```

Benchmarks using both Fortran and C:

```

-mabi=lp64 -std=c99 -L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-stack-arrays -fno-strict-aliasing
-ljemalloc

```

Benchmarks using both C and C++:

```

-mabi=lp64 -std=c++03 -std=c99
-L/home/ampctest/ampere_spec2017/gcc/install/lib64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-L/home/ampctest/ampere_spec2017/gcc/install/lib  
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast  
-mcpu=neoverse-n1 -flto -fno-strict-aliasing -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-mabi=lp64 -std=c++03 -std=c99  
-L/home/ampctest/ampere_spec2017/gcc/install/lib64  
-L/home/ampctest/ampere_spec2017/gcc/install/lib  
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -g -Ofast  
-mcpu=neoverse-n1 -flto -fno-stack-arrays -fno-strict-aliasing  
-ljemalloc
```

Base Other Flags

C benchmarks:

```
-Wl, -Map, mapfile
```

C++ benchmarks:

```
-Wl, -Map, mapfile
```

Fortran benchmarks:

```
-fallow-argument-mismatch -Wl, -Map, mapfile
```

Benchmarks using both Fortran and C:

```
-fallow-argument-mismatch -Wl, -Map, mapfile
```

Benchmarks using both C and C++:

```
-Wl, -Map, mapfile
```

Benchmarks using Fortran, C, and C++:

```
-fallow-argument-mismatch -Wl, -Map, mapfile
```

Peak Compiler Invocation

C benchmarks:

```
gcc
```

C++ benchmarks:

```
g++
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using both C and C++:

g++ gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-mabi=lp64 -std=c99 -L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib -fprofile-generate
-fprofile-use -g -Ofast -mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96 --param max-inline-insns-auto=64
--param inline-unit-growth=96 -ljemalloc
```

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -mabi=lp64 -std=c++03

```
-L/home/ampctest/ampere_spec2017/gcc/install/lib64
-L/home/ampctest/ampere_spec2017/gcc/install/lib
-L/home/ampctest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=256
--param max-inline-insns-auto=128
--param inline-unit-growth=256 -ffinite-loops -ljemalloc
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

```
503.bwaves_r: -mabi=lp64
-L/home/ampptest/ampere_spec2017/gcc/install/lib64
-L/home/ampptest/ampere_spec2017/gcc/install/lib
-L/home/ampptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
-fno-stack-arrays -ljemalloc
```

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

```
521.wrf_r: -mabi=lp64 -std=c99
-L/home/ampptest/ampere_spec2017/gcc/install/lib64
-L/home/ampptest/ampere_spec2017/gcc/install/lib
-L/home/ampptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96 -fno-stack-arrays -ljemalloc
```

```
527.cam4_r: -mabi=lp64 -std=c99
-L/home/ampptest/ampere_spec2017/gcc/install/lib64
-L/home/ampptest/ampere_spec2017/gcc/install/lib
-L/home/ampptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96 -fno-stack-arrays
-fno-strict-aliasing -ljemalloc
```

Benchmarks using both C and C++:

```
511.povray_r: -mabi=lp64 -std=c++03 -std=c99
-L/home/ampptest/ampere_spec2017/gcc/install/lib64
-L/home/ampptest/ampere_spec2017/gcc/install/lib
-L/home/ampptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
--param early-inlining-insns=256  
--param max-inline-insns-auto=128  
--param inline-unit-growth=256 -ffinite-loops  
-fno-strict-aliasing -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

```
-w -Wl,-Map,mapfile
```

C++ benchmarks:

```
-Wl,-Map,mapfile
```

Fortran benchmarks (except as noted below):

```
-Wl,-Map,mapfile
```

554.roms_r: -fallow-argument-mismatch -Wl,-Map,mapfile

Benchmarks using both Fortran and C:

521.wrf_r: -w -fallow-argument-mismatch -Wl,-Map,mapfile

527.cam4_r: -fallow-argument-mismatch -Wl,-Map,mapfile

Benchmarks using both C and C++:

```
-Wl,-Map,mapfile
```

Benchmarks using Fortran, C, and C++:

```
-fallow-argument-mismatch -Wl,-Map,mapfile
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2021-07-21.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-platform-settings-Altra-rev.2.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

SPECrate®2017_fp_base = 204

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082

Test Date: Feb-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2021-07-21.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-platform-settings-Altra-rev.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-22 10:23:57-0500.

Report generated on 2021-09-17 12:26:04 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-17.