



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-28RL  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2021

Hardware Availability: Feb-2020

Software Availability: Jun-2021

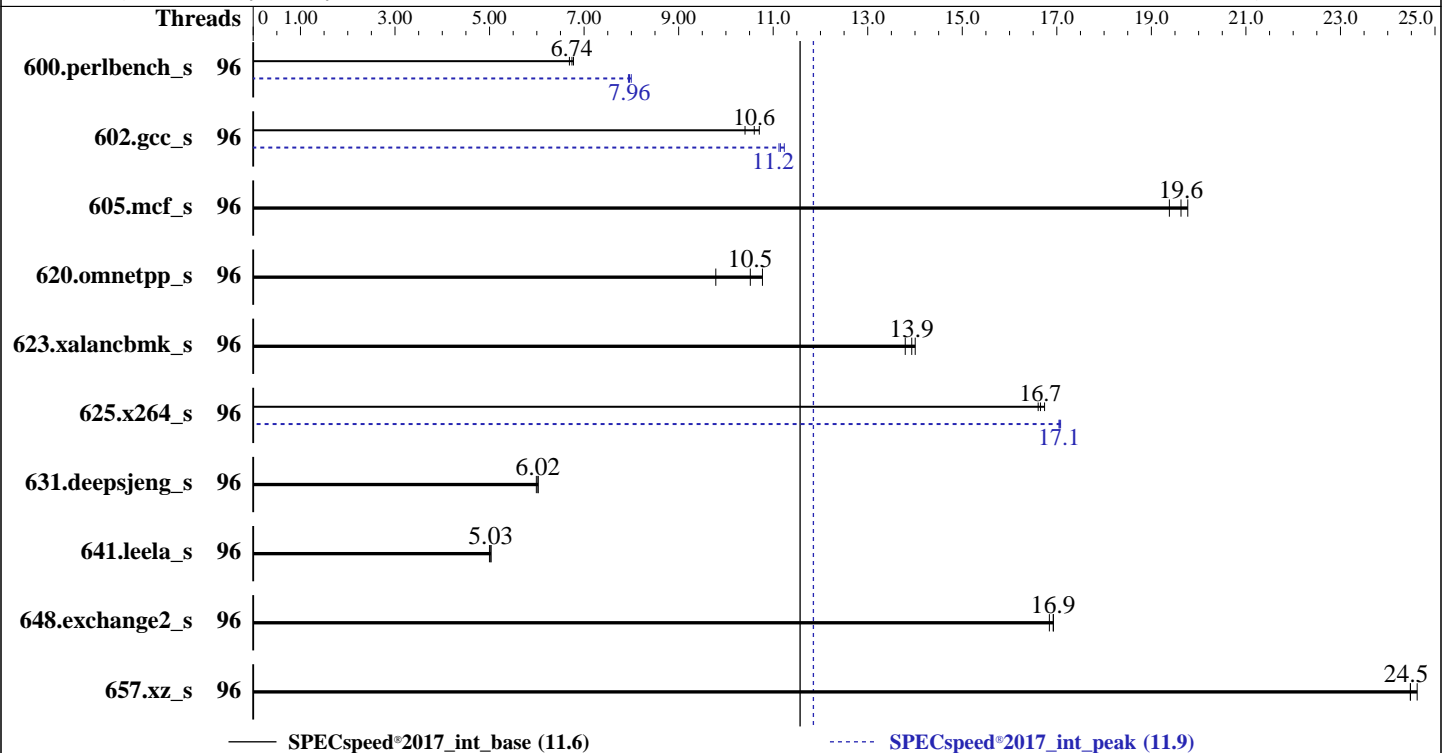

### Hardware

CPU Name: Intel Xeon Gold 6248R  
 Max MHz: 4000  
 Nominal: 3000  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933P-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: CentOS Linux release 8.4.2105  
 Kernel 4.18.0-305.3.1.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;  
 Parallel: Yes  
 Firmware: Version V8.102 released Jun-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-28RL  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2021

Hardware Availability: Feb-2020

Software Availability: Jun-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	96	265	6.69	<b>263</b>	<b>6.74</b>	262	6.78	96	224	7.94	<b>223</b>	<b>7.96</b>	222	8.00
602.gcc_s	96	383	10.4	372	10.7	<b>376</b>	<b>10.6</b>	96	358	11.1	<b>357</b>	<b>11.2</b>	354	11.2
605.mcf_s	96	<b>241</b>	<b>19.6</b>	244	19.4	239	19.8	96	<b>241</b>	<b>19.6</b>	244	19.4	239	19.8
620.omnetpp_s	96	167	9.79	151	10.8	<b>155</b>	<b>10.5</b>	96	167	9.79	151	10.8	<b>155</b>	<b>10.5</b>
623.xalancbmk_s	96	103	13.8	101	14.0	<b>102</b>	<b>13.9</b>	96	103	13.8	101	14.0	<b>102</b>	<b>13.9</b>
625.x264_s	96	<b>106</b>	<b>16.7</b>	105	16.7	106	16.6	96	103	17.1	<b>103</b>	<b>17.1</b>	103	17.0
631.deepsjeng_s	96	239	5.99	238	6.03	<b>238</b>	<b>6.02</b>	96	239	5.99	238	6.03	<b>238</b>	<b>6.02</b>
641.leela_s	96	<b>339</b>	<b>5.03</b>	341	5.00	339	5.03	96	<b>339</b>	<b>5.03</b>	341	5.00	339	5.03
648.exchange2_s	96	<b>174</b>	<b>16.9</b>	174	16.9	175	16.8	96	<b>174</b>	<b>16.9</b>	174	16.9	175	16.8
657.xz_s	96	253	24.5	<b>253</b>	<b>24.5</b>	251	24.6	96	253	24.5	<b>253</b>	<b>24.5</b>	251	24.6

SPECspeed®2017\_int\_base = **11.6**

SPECspeed®2017\_int\_peak = **11.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled locally by Netweb
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology set to Custom

Power Performance Tuning set to BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

LLC Dead Line Alloc set to Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on spec Wed Jul 28 13:38:36 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

BIOS Vendor ID: Intel(R) Corporation

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz

BIOS Model name: Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz

Stepping: 7

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Platform Notes (Continued)

```

CPU MHz: 1256.561
CPU max MHz: 4000.0000
CPU min MHz: 1200.0000
BogoMIPS: 6000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-23,48-71
NUMA node1 CPU(s): 24-47,72-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms
invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

```

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 48 49 50 51
52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71

```

node 0 size: 192100 MB

node 0 free: 156473 MB

```

node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 72
73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

```

node 1 size: 193487 MB

node 1 free: 156826 MB

node distances:

```

node 0 1
0: 10 21
1: 21 10

```

From /proc/meminfo

MemTotal: 394842900 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.4.2105
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.4
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.4.2105
system-release: CentOS Linux release 8.4.2105
system-release-cpe: cpe:/o:centos:centos:8

uname -a:
Linux spec 4.18.0-305.3.1.el8.x86_64 #1 SMP Tue Jun 1 16:14:33 UTC 2021 x86_64 x86_64
x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled

run-level 3 Jul 27 03:19

SPEC is set to: /home/cpu2017

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	372G	190G	182G	52%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:           Tyrone Systems
Product:          Tyrone Camarero DIT400TR-28R
Product Family:  empty
Serial:           empty

```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

```

```

BIOS:
  BIOS Vendor:      American Megatrends Inc.
  BIOS Version:     V8.102
  BIOS Date:        06/09/2020
  BIOS Revision:    5.14
  Firmware Revision: 7.0

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C          | 600.perlbench_s(peak)
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
625.x264\_s(base, peak) 657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench\_s: icc

C++ benchmarks:

icpx

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DIT400TR-28RL**  
(3.0 GHz, Intel Xeon Gold 6248R)

SPECspeed®2017\_int\_base = 11.6

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jul-2021

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

641.leela\_s:basepeak = yes

Fortran benchmarks:

648.exchange2\_s:basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-28 13:38:36-0400.

Report generated on 2021-09-20 13:58:05 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-20.