



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Oct-2021

Software Availability: Dec-2020

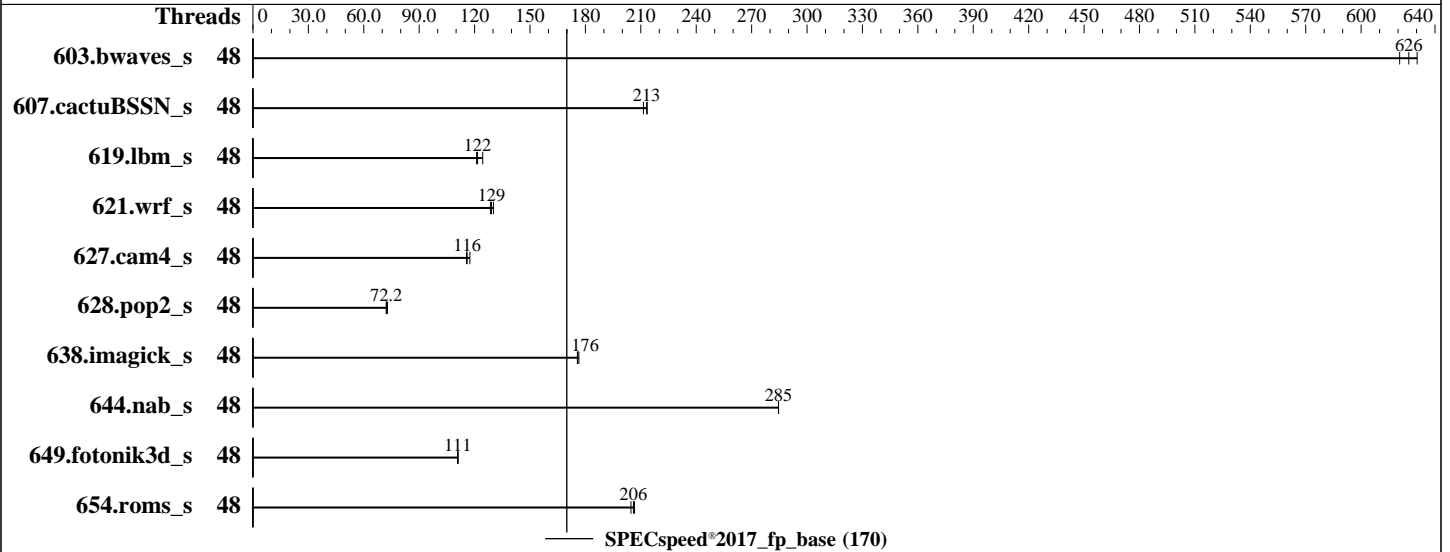

Hardware

CPU Name: Intel Xeon Gold 5318Y
 Max MHz: 3400
 Nominal: 2100
 Enabled: 48 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.23.0 for D3894-A1x. Released Oct-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	93.6	630	95.0	621	94.3	626							
607.cactuBSSN_s	48	78.2	213	78.1	213	78.9	211							
619.lbm_s	48	43.3	121	42.1	124	43.1	122							
621.wrf_s	48	102	129	103	129	102	130							
627.cam4_s	48	75.5	117	76.4	116	76.7	116							
628.pop2_s	48	164	72.2	163	72.8	164	72.2							
638.imagick_s	48	82.0	176	82.1	176	81.8	176							
644.nab_s	48	61.4	285	61.4	285	61.4	285							
649.fotonik3d_s	48	82.3	111	82.2	111	82.1	111							
654.roms_s	48	76.4	206	76.2	207	76.9	205							

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/home/PVT/speccpu-1.1.8_aul/lib/intel64:/home/PVT/speccpu-1.1.8_aul/je5
.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper Threading = Disabled

Sysinfo program /home/PVT/speccpu-1.1.8_aul/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri Sep 17 01:50:53 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5318Y CPU @ 2.10GHz
 2 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

```
From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5318Y CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2538.664
CPU max MHz: 3400.0000
CPU min MHz: 800.0000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

BogoMIPS:          4200.00
Virtualization:    VT-x
L1d cache:         48K
L1i cache:         32K
L2 cache:          1280K
L3 cache:          36864K
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36864 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 257436 MB
node 0 free: 256542 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 258040 MB
node 1 free: 257709 MB
node distances:
node  0  1
 0:  10  20
 1:  20  10

```

```

From /proc/meminfo
MemTotal:      527847896 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
```

```
NAME="Red Hat Enterprise Linux"
```

```
VERSION="8.2 (Ootpa)"
```

```
ID="rhel"
```

```
ID_LIKE="fedora"
```

```
VERSION_ID="8.2"
```

```
PLATFORM_ID="platform:el8"
```

```
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
```

```
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
```

```
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
```

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Sep 17 01:44
```

```
SPEC is set to: /home/PVT/speccpu-1.1.8_aul
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	330G	116G	215G	35%	/home

```
From /sys/devices/virtual/dmi/id
Vendor: FUJITSU
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y, 2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Platform Notes (Continued)

Product: PRIMERGY CX2560 M6
Product Family: SERVER
Serial: b000000026

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x NO DIMM NO DIMM
16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R1.23.0 for D3894-A1x
BIOS Date: 07/29/2021
BIOS Revision: 1.23
Firmware Revision: 3.27

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2560 M6, Intel Xeon Gold 5318Y,
2.10GHz

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: Dec-2020

Base Portability Flags (Continued)

649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevA.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevA.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-17 01:50:52-0400.
Report generated on 2021-10-12 17:17:41 by CPU2017 PDF formatter v6442.
Originally published on 2021-10-12.