



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.


H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_base = 12.4

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021
Hardware Availability: Sep-2021
Software Availability: Mar-2021

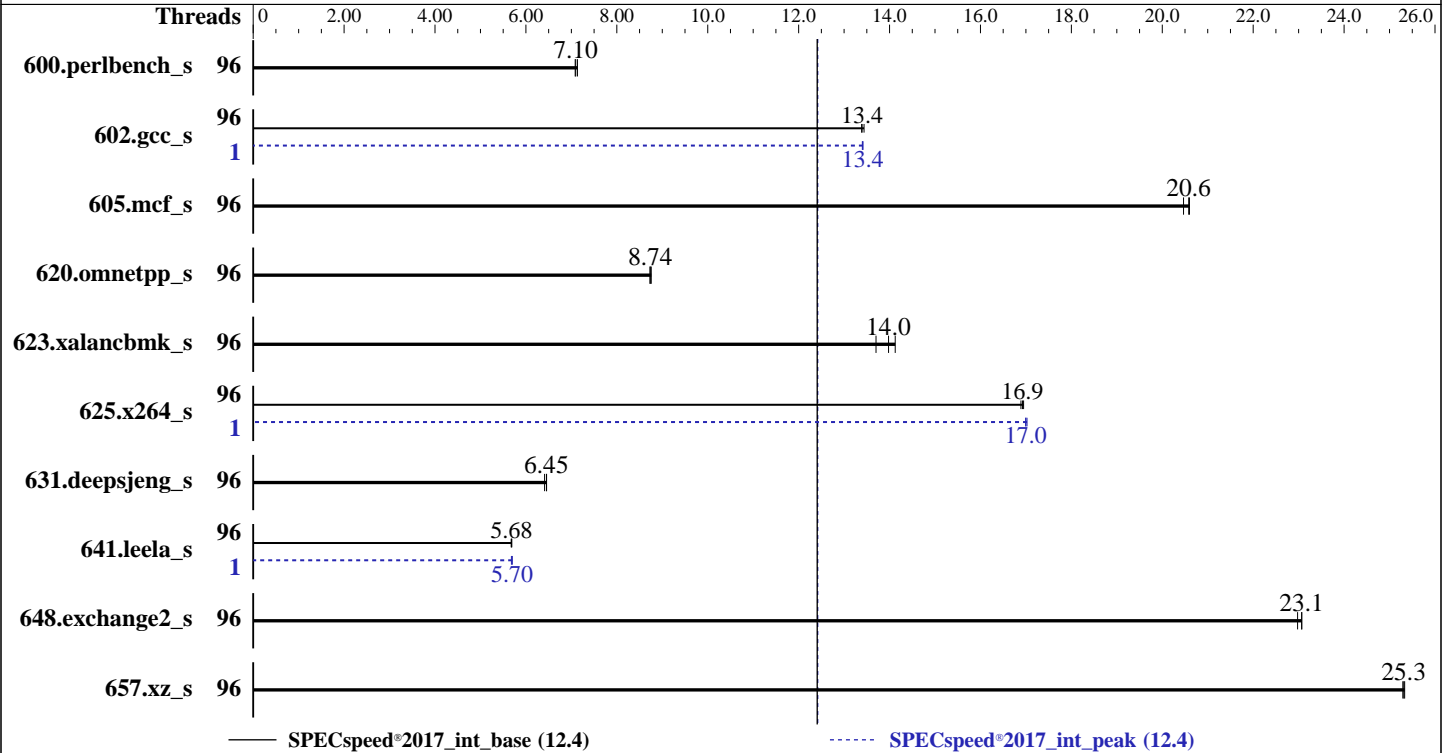

Hardware

CPU Name: AMD EPYC 7643
Max MHz: 3600
Nominal: 2300
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 1.92 TB SSD SATA
Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
kernel version 4.18.0-240.el8.x86_64
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
Parallel: Yes
Firmware: Version 5.11 released Oct-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	250	7.10	249	7.13	251	7.08	96	250	7.10	249	7.13	251	7.08
602.gcc_s	96	296	13.4	297	13.4	297	13.4	1	297	13.4	297	13.4	297	13.4
605.mcf_s	96	229	20.6	229	20.6	231	20.5	96	229	20.6	229	20.6	231	20.5
620.omnetpp_s	96	187	8.73	186	8.76	187	8.74	96	187	8.73	186	8.76	187	8.74
623.xalancbmk_s	96	103	13.7	101	14.0	100	14.1	96	103	13.7	101	14.0	100	14.1
625.x264_s	96	104	16.9	104	16.9	104	16.9	1	104	17.0	104	17.0	104	17.0
631.deepsjeng_s	96	224	6.41	222	6.45	222	6.45	96	224	6.41	222	6.45	222	6.45
641.leela_s	96	300	5.68	300	5.68	300	5.69	1	300	5.70	300	5.68	299	5.70
648.exchange2_s	96	127	23.1	127	23.1	128	23.0	96	127	23.1	127	23.1	128	23.0
657.xz_s	96	244	25.3	244	25.3	244	25.3	96	244	25.3	244	25.3	244	25.3

SPECspeed®2017_int_base = **12.4**

SPECspeed®2017_int_peak = **12.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:  
GOMP_CPU_AFFINITY = "0-191"  
LD_LIBRARY_PATH =  
    "/home/speccpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/speccpu2017/a  
    md_speed_aocc300_milan_B_lib/lib32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "192"
```

```
Environment variables set by runcpu during the 602.gcc_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 625.x264_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

```
Environment variables set by runcpu during the 641.leela_s peak run:  
GOMP_CPU_AFFINITY = "0"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Platform Notes

BIOS Configuration

APBDIS set to 1
DLWM Support set to Disabled
Determinism Slider set to Power
NUMA nodes per socket set to NPS2
Fix Soc P-States set to P0

Sysinfo program /home/speccpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Nov 23 18:49:07 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7643 48-Core Processor
 2 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 48
siblings  : 96
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
```

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7643 48-Core Processor
Stepping: 1
CPU MHz: 2536.302
CPU max MHz: 2300.0000
CPU min MHz: 1500.0000
BogoMIPS: 4591.11
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Platform Notes (Continued)

```

Virtualization:      AMD-V
L1d cache:          32K
L1i cache:          32K
L2 cache:           512K
L3 cache:           32768K
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99
100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 0 size: 257342 MB
node 0 free: 256838 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
142 143
node 1 size: 257797 MB
node 1 free: 257271 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
166 167
node 2 size: 257795 MB
node 2 free: 257336 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189
190 191
node 3 size: 257858 MB
node 3 free: 257577 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Platform Notes (Continued)

node distances:

```

node  0  1  2  3
0:   10  12  32  32
1:   12  10  32  32
2:   32  32  10  12
3:   32  32  12  10

```

From /proc/meminfo

```

MemTotal:      1056387036 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

```

NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

```

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user pointer

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization
Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 23 18:46 last=5

SPEC is set to: /home/speccpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.7T	47G	1.7T	3%	/home

From /sys/devices/virtual/dmi/id

Vendor: New H3C Technologies Co., Ltd.
Product: R5500 G5
Product Family: Rack
Serial: 210235A2R6000000123

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x SK Hynix HMAA8GR7CJR4N-XN 64 GB 2 rank 3200
16x Unknown Unknown

BIOS:

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 5.11
BIOS Date: 10/19/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Compiler Version Notes (Continued)

```

=====
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
         | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

=====
Fortran | 648.exchange2_s(base, peak)
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

```
602.gcc_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

605.mcf_s: basepeak = yes

625.x264_s: Same as 602.gcc_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

```
641.leela_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 12.4

H3C UniServer R5500 G5
(2.30 GHz, AMD EPYC 7643)

SPECspeed®2017_int_peak = 12.4

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

648.exchange2_s:basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.0-Milan-revC.html

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.0-Milan-revC.xml

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-23 18:49:06-0500.

Report generated on 2021-12-22 12:33:46 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.