



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

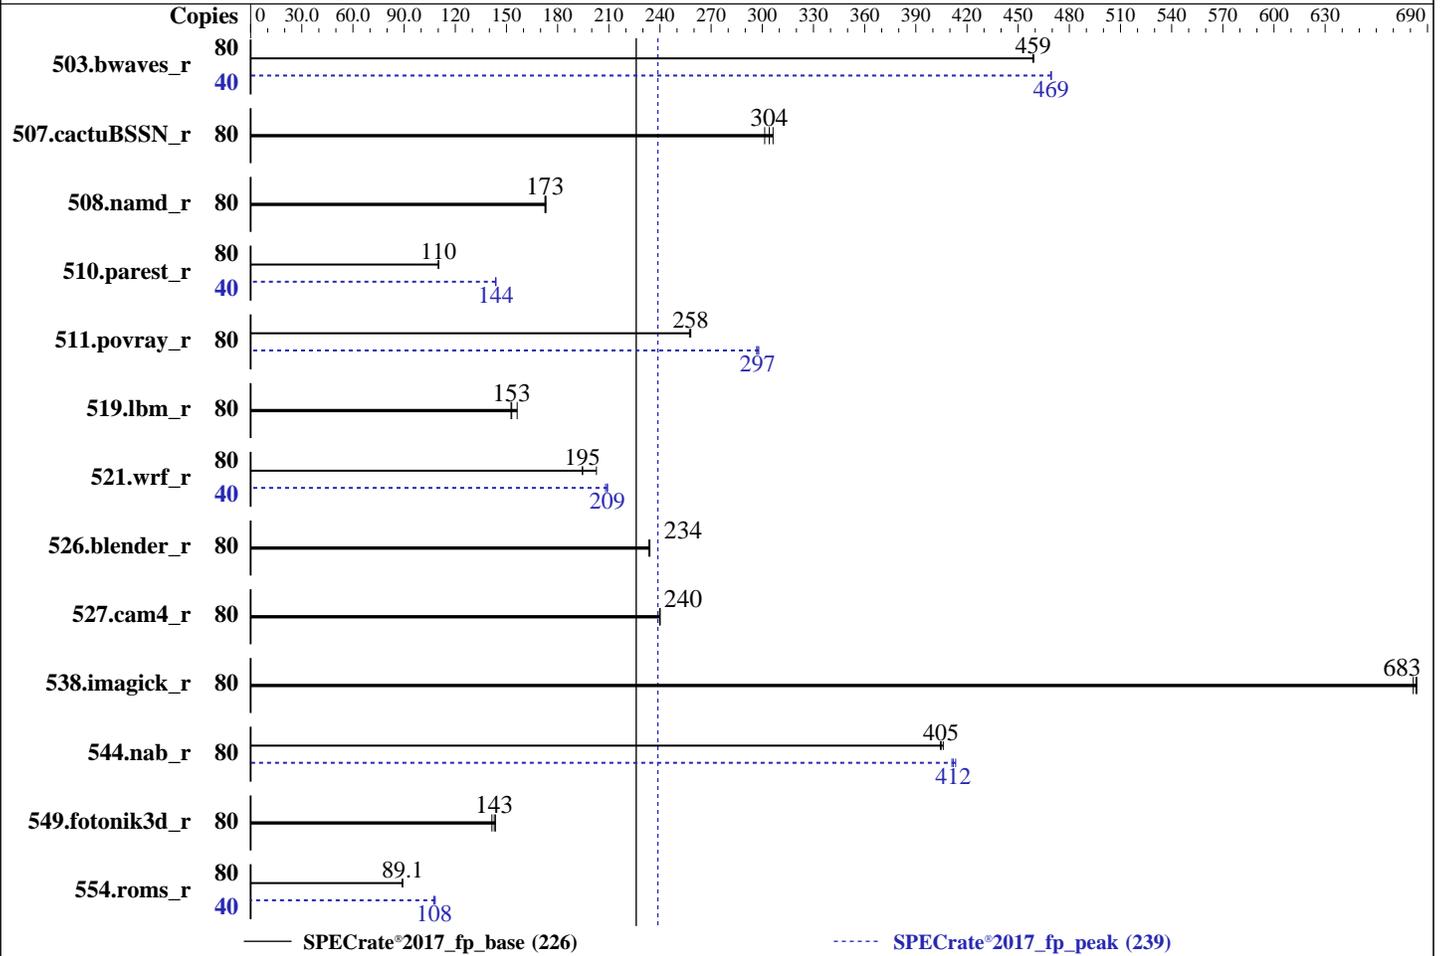

Hardware

CPU Name: Intel Xeon Gold 5218R
 Max MHz: 4000
 Nominal: 2100
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 4.1.21 released Aug-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1749	459	1747	459	<u>1748</u>	<u>459</u>	40	<u>855</u>	<u>469</u>	855	469	854	469
507.cactuBSSN_r	80	331	306	336	301	<u>333</u>	<u>304</u>	80	331	306	336	301	<u>333</u>	<u>304</u>
508.namd_r	80	<u>440</u>	<u>173</u>	439	173	440	173	80	<u>440</u>	<u>173</u>	439	173	440	173
510.parest_r	80	<u>1900</u>	<u>110</u>	1902	110	1899	110	40	<u>728</u>	<u>144</u>	728	144	728	144
511.povray_r	80	724	258	<u>724</u>	<u>258</u>	726	257	80	627	298	630	297	<u>628</u>	<u>297</u>
519.lbm_r	80	552	153	<u>551</u>	<u>153</u>	540	156	80	552	153	<u>551</u>	<u>153</u>	540	156
521.wrf_r	80	884	203	921	194	<u>921</u>	<u>195</u>	40	428	209	<u>428</u>	<u>209</u>	431	208
526.blender_r	80	521	234	<u>521</u>	<u>234</u>	522	233	80	521	234	<u>521</u>	<u>234</u>	522	233
527.cam4_r	80	584	240	583	240	<u>583</u>	<u>240</u>	80	584	240	583	240	<u>583</u>	<u>240</u>
538.imagick_r	80	<u>291</u>	<u>683</u>	291	684	292	682	80	<u>291</u>	<u>683</u>	291	684	292	682
544.nab_r	80	<u>333</u>	<u>405</u>	332	406	333	404	80	327	411	326	413	<u>327</u>	<u>412</u>
549.fotonik3d_r	80	2204	141	2172	144	<u>2182</u>	<u>143</u>	80	2204	141	2172	144	<u>2182</u>	<u>143</u>
554.roms_r	80	<u>1427</u>	<u>89.1</u>	1427	89.1	1430	88.9	40	592	107	587	108	<u>591</u>	<u>108</u>

SPECrate®2017_fp_base = 226

SPECrate®2017_fp_peak = 239

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS and OS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
ClE Support set to Disable
scaling_governor set to performance
```

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Nov 30 14:01:00 2021
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu from util-linux 2.32.1:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Nov-2021
Hardware Availability: Feb-2020
Software Availability: Dec-2020

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                80
On-line CPU(s) list:   0-79
Thread(s) per core:    2
Core(s) per socket:    20
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
Stepping:              7
CPU MHz:               2900.005
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s):    3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s):    20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s):    23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 192120 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Platform Notes (Continued)

```

node 0 free: 180849 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 193503 MB
node 1 free: 184576 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193531 MB
node 2 free: 184720 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193530 MB
node 3 free: 184739 MB
node distances:
node  0  1  2  3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

```

From /proc/meminfo

MemTotal: 791230760 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Nov 30 05:06

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	102G	291G	26%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF5280M5
Serial:	217453240

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron 18ASF4G72PZ-2G9E1 32 GB 1 rank 2933, configured at 2666

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	4.1.21
BIOS Date:	08/25/2021
BIOS Revision:	5.14

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C   | 511.povray_r(peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C   | 511.povray_r(base) 526.blender_r(base, peak)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C   | 511.povray_r(peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
521.wrf_r: ifort icc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

527.cam4_r: ifort icx

Benchmarks using both C and C++:

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_fp_base = 226

Inspur NF5280M5 (Intel Xeon Gold 5218R)

SPECrate®2017_fp_peak = 239

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Nov-2021

Hardware Availability: Feb-2020

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-30 14:00:59-0500.

Report generated on 2022-01-05 13:32:14 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.