



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066


Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

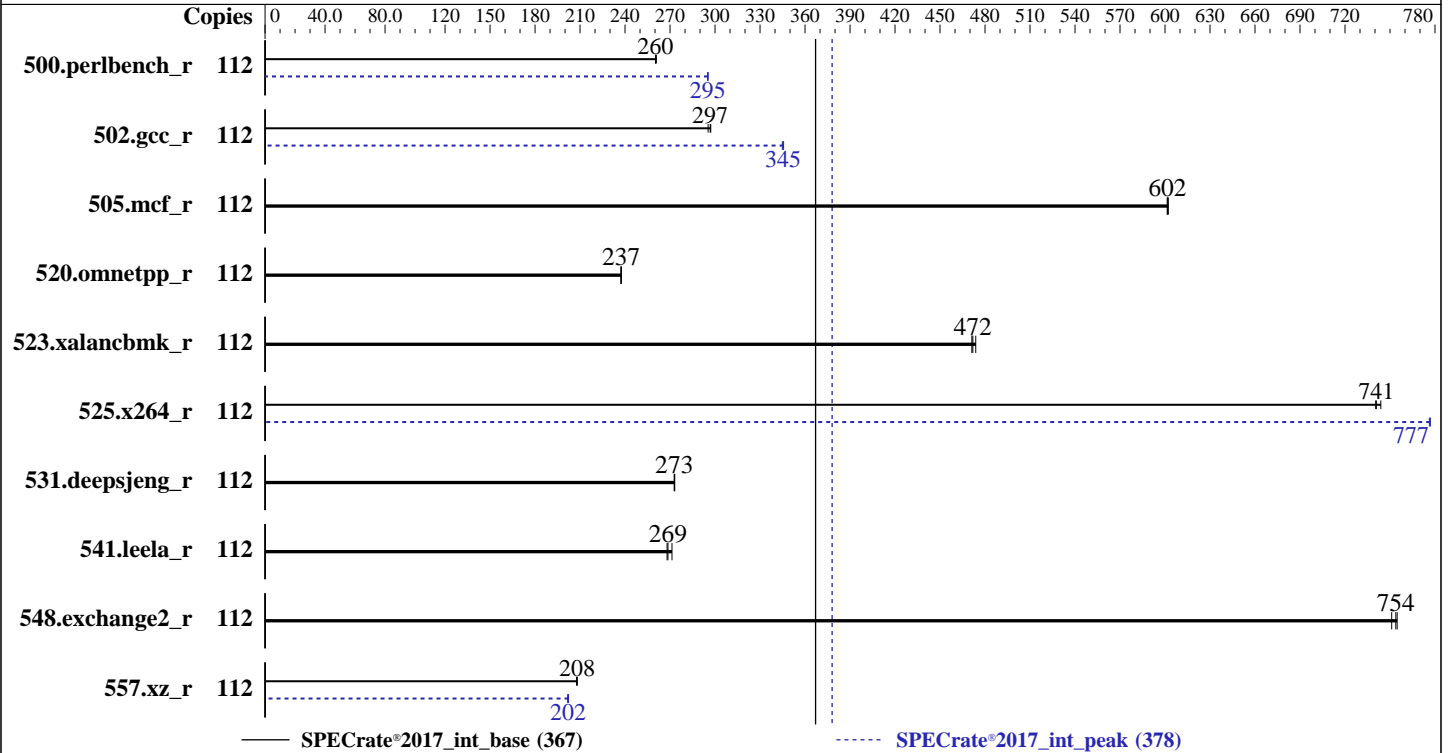

Hardware

CPU Name: Intel Xeon Gold 6330
 Max MHz: 3100
 Nominal: 2000
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 42 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 2.0 TB SSD NVME
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 5.20 released Apr-2021 BIOS
 File System: xfs
 System State: Run level 5 (multi-user with GUI)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	112	685	260	683	261	685	260	112	604	295	604	295	604	295		
502.gcc_r	112	534	297	534	297	537	295	112	459	346	459	345	460	345		
505.mcf_r	112	301	601	301	602	301	602	112	301	601	301	602	301	602		
520.omnetpp_r	112	619	238	619	237	619	237	112	619	238	619	237	619	237		
523.xalancbmk_r	112	251	471	250	474	251	472	112	251	471	250	474	251	472		
525.x264_r	112	265	741	264	744	265	740	112	252	777	253	776	252	777		
531.deepsjeng_r	112	470	273	470	273	470	273	112	470	273	470	273	470	273		
541.leela_r	112	690	269	692	268	684	271	112	690	269	692	268	684	271		
548.exchange2_r	112	391	751	389	755	389	754	112	391	751	389	755	389	754		
557.xz_r	112	582	208	581	208	581	208	112	598	202	599	202	600	202		

SPECrate®2017_int_base = 367

SPECrate®2017_int_peak = 378

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set SNC to enabled

Set Patrol Scrub to disabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Dec 2 17:55:53 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Platform Notes (Continued)

```

Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping: 6
CPU MHz: 1219.470
CPU max MHz: 3100.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 43008K
NUMA node0 CPU(s): 0-13,56-69
NUMA node1 CPU(s): 14-27,70-83
NUMA node2 CPU(s): 28-41,84-97
NUMA node3 CPU(s): 42-55,98-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 43008 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 56 57 58 59 60 61 62 63 64 65 66 67 68 69
node 0 size: 125541 MB
node 0 free: 127981 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 70 71 72 73 74 75 76 77 78 79 80
81 82 83

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

Platform Notes (Continued)

```

node 1 size: 125927 MB
node 1 free: 128459 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 84 85 86 87 88 89 90 91 92 93 94
95 96 97
node 2 size: 125949 MB
node 2 free: 127910 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 125937 MB
node 3 free: 128008 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

```

From /proc/meminfo

```

MemTotal:      527995108 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.8T	509G	1.3T	29%	/home

From /sys/devices/virtual/dmi/id

```

Vendor:          New H3C Technologies Co., Ltd.
Product:         H3C UniServer R5500 G5
Product Family: Rack
Serial:          0235A3VWH21C000001

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

16x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200, configured at 2933
16x NO DIMM NO DIMM

```

BIOS:

```

BIOS Vendor:     American Megatrends International, LLC.
BIOS Version:    5.20
BIOS Date:       04/09/2021
BIOS Revision:   5.21

```

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Compiler Version Notes

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -wl, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -fno-strict-overflow

-mbranches-within-32B-boundaries

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

502.gcc_r: -m32

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto

```
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.xml



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 367

H3C UniServer R5500 G5 (Intel Xeon Gold 6330)

SPECrate®2017_int_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-02 17:55:53-0500.

Report generated on 2022-02-01 19:32:38 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-31.