



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro


A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

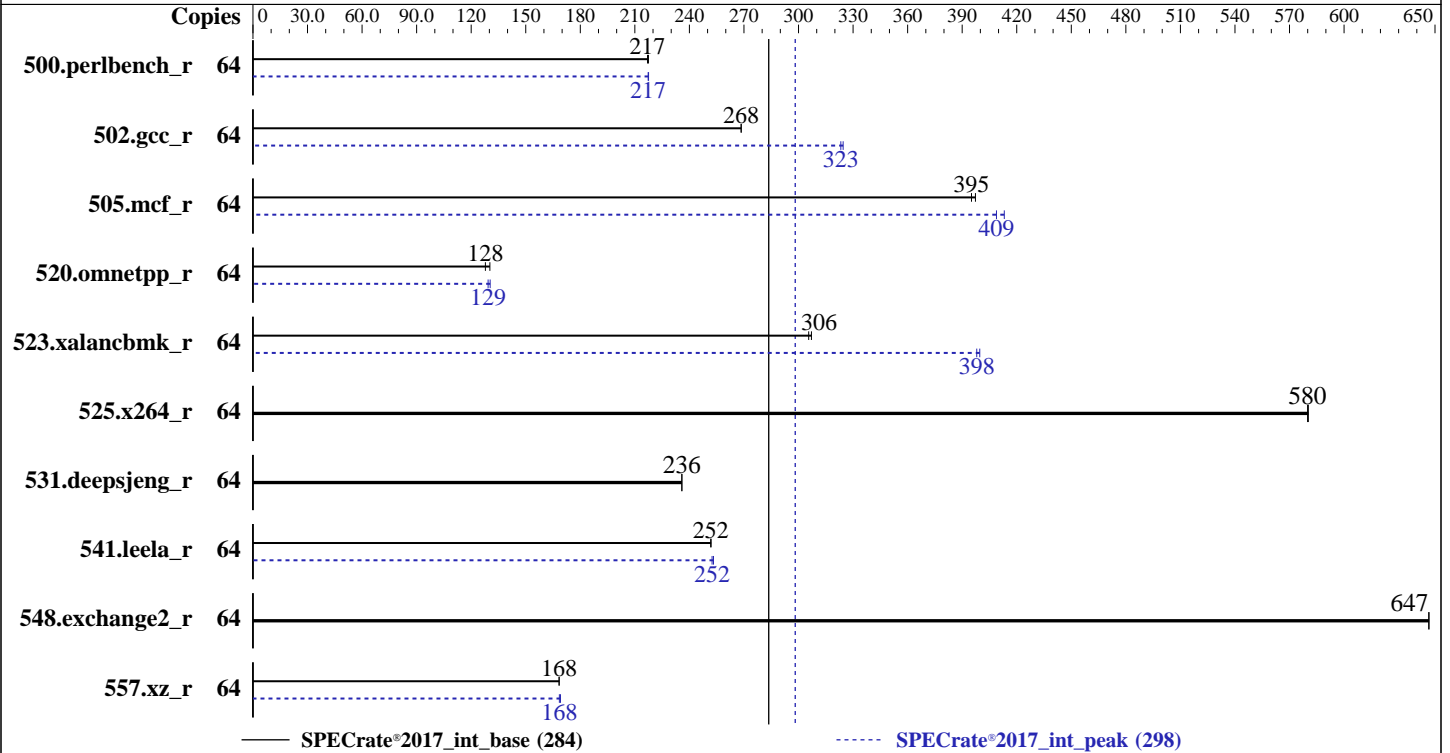

Hardware

CPU Name: AMD EPYC 7573X
Max MHz: 3600
Nominal: 2800
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 240 GB SATA III SSD
Other: None

Software

OS: Ubuntu 20.04.3 LTS
Kernel 5.4.0-99-generic
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
Parallel: No
Firmware: Version 2.3a released Jan-2022
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	468	217	470	217			64	469	217	468	218		
502.gcc_r	64	338	268	338	268			64	279	325	280	323		
505.mcf_r	64	262	395	260	397			64	250	413	253	409		
520.omnetpp_r	64	645	130	657	128			64	644	130	649	129		
523.xalancbmk_r	64	221	306	220	307			64	170	398	169	400		
525.x264_r	64	193	580	193	580			64	193	580	193	580		
531.deepsjeng_r	64	311	236	311	236			64	311	236	311	236		
541.leela_r	64	421	252	421	252			64	420	252	419	253		
548.exchange2_r	64	259	647	259	647			64	259	647	259	647		
557.xz_r	64	410	168	411	168			64	410	168	409	169		

SPECrate®2017_int_base = **284**

SPECrate®2017_int_peak = **298**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib:/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 280
Package Power Limit Control = Manual
Package Power Limit = 280

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Platform Notes (Continued)

APBDIS = 1
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on h12ssw-7573x Wed Feb 16 07:22:17 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7573X 32-Core Processor
1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu from util-linux 2.34:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 1
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7573X 32-Core Processor
Stepping: 2
Frequency boost: enabled
CPU MHz: 1665.530
CPU max MHz: 2800.0000
CPU min MHz: 1500.0000
BogoMIPS: 5600.21
Virtualization: AMD-V
L1d cache: 1 MiB
L1i cache: 1 MiB
L2 cache: 16 MiB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Platform Notes (Continued)

```

L3 cache:                768 MiB
NUMA node0 CPU(s):      0-3,32-35
NUMA node1 CPU(s):      4-7,36-39
NUMA node2 CPU(s):      8-11,40-43
NUMA node3 CPU(s):      12-15,44-47
NUMA node4 CPU(s):      16-19,48-51
NUMA node5 CPU(s):      20-23,52-55
NUMA node6 CPU(s):      24-27,56-59
NUMA node7 CPU(s):      28-31,60-63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	512K	16M	8	Unified	2
L3	96M	768M	16	Unified	3

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Platform Notes (Continued)

```

node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 64384 MB
node 0 free: 64148 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 64507 MB
node 1 free: 64300 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 64481 MB
node 2 free: 64307 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 64508 MB
node 3 free: 64315 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 64509 MB
node 4 free: 64228 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 64508 MB
node 5 free: 64260 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 64509 MB
node 6 free: 64350 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 64496 MB
node 7 free: 64322 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 12 12 12 12 12 12
  1: 11 10 12 12 12 12 12 12
  2: 12 12 10 11 12 12 12 12
  3: 12 12 11 10 12 12 12 12
  4: 12 12 12 12 10 11 12 12
  5: 12 12 12 12 11 10 12 12
  6: 12 12 12 12 12 12 10 11
  7: 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal:      528289516 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: balanced

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

/usr/bin/lsb_release -d

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Platform Notes (Continued)

Ubuntu 20.04.3 LTS

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux h12ssw-7573x 5.4.0-99-generic #112-Ubuntu SMP Thu Feb 3 13:50:55 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Feb 16 07:19

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  219G   17G  192G   8% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Serial:          0123456789
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 8x NO DIMM Unknown
- 8x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:

- BIOS Vendor: American Megatrends Inc.
- BIOS Version: 2.3a
- BIOS Date: 01/25/2022
- BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalanbmk_r(peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 523.xalanbmk_r(peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Compiler Version Notes (Continued)

| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Base Other Flags (Continued)

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR, AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

502.gcc_r: -m32 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -fgnu89-inline  
-ljemalloc
```

505.mcf_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

```
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1114S-WN10RT
(H12SSW-NTR , AMD EPYC 7573X)

SPECrate®2017_int_base = 284

SPECrate®2017_int_peak = 298

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-16 02:22:17-0500.

Report generated on 2022-03-22 10:58:09 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-22.