



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55


Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: May-2022

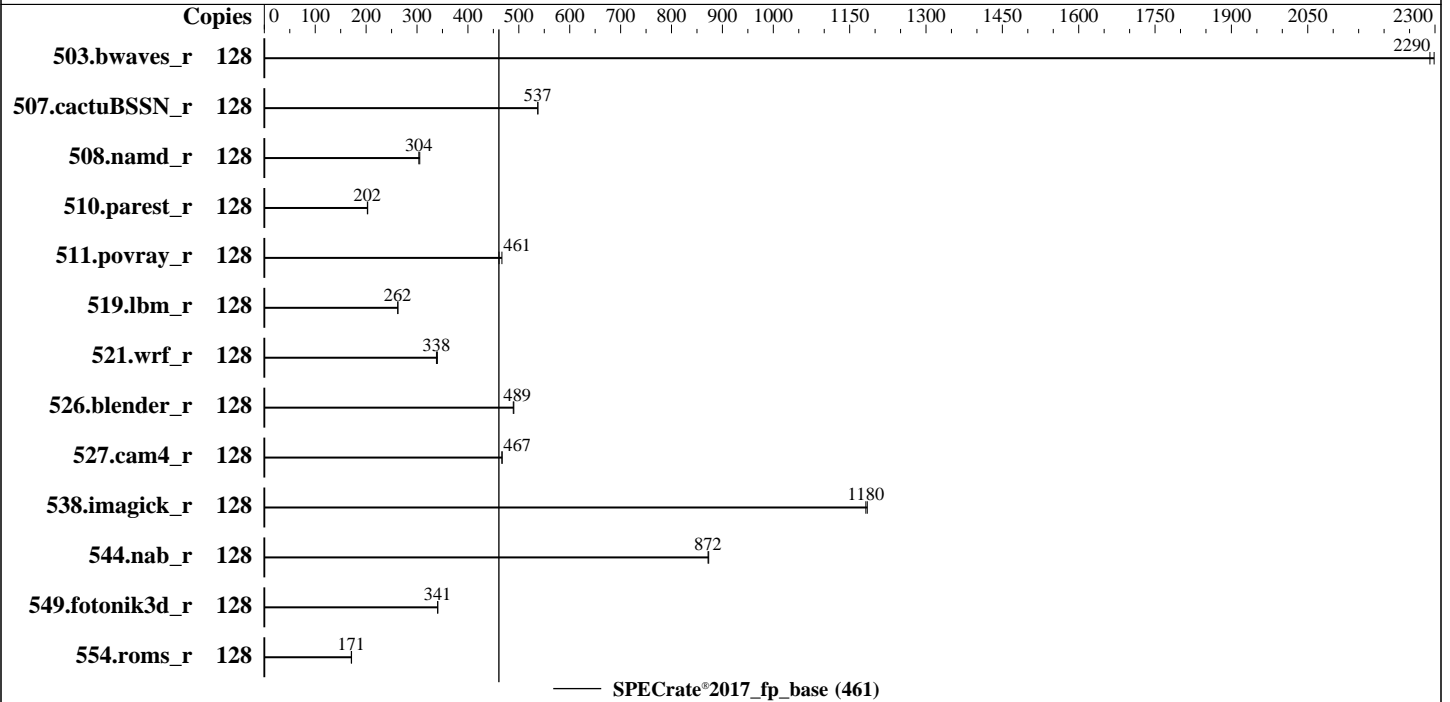

### Hardware

CPU Name: Intel Xeon Gold 6338  
 Max MHz: 3200  
 Nominal: 2000  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 80 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)  
 4.18.0-372.9.1.el8.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 1.7.5 released Sep-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b><u>561</u></b>	<b><u>2290</u></b>	559	2300									
507.cactuBSSN_r	128	301	537	<b><u>302</u></b>	<b><u>537</u></b>									
508.namd_r	128	<b><u>401</u></b>	<b><u>304</u></b>	398	305									
510.parest_r	128	1648	203	<b><u>1654</u></b>	<b><u>202</u></b>									
511.povray_r	128	<b><u>648</u></b>	<b><u>461</u></b>	640	467									
519.lbm_r	128	<b><u>515</u></b>	<b><u>262</u></b>	514	262									
521.wrf_r	128	<b><u>848</u></b>	<b><u>338</u></b>	843	340									
526.blender_r	128	398	490	<b><u>399</u></b>	<b><u>489</u></b>									
527.cam4_r	128	479	467	<b><u>480</u></b>	<b><u>467</u></b>									
538.imagick_r	128	<b><u>269</u></b>	<b><u>1180</u></b>	269	1180									
544.nab_r	128	247	873	<b><u>247</u></b>	<b><u>872</u></b>									
549.fotonik3d_r	128	<b><u>1465</u></b>	<b><u>341</u></b>	1464	341									
554.roms_r	128	<b><u>1190</u></b>	<b><u>171</u></b>	1187	171									

SPECrate®2017\_fp\_base = 461

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## General Notes (Continued)

Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DIMM Self Healing on  
 Uncorrectable Memory Error : Disabled  
 Virtualization Technology : Disabled  
 Sub NUMA Cluster : 2-way Clustering  
 DCU Streamer Prefetcher : Disabled  
 LLC Prefetch : Disabled  
 Dead Line LLC Alloc : Disabled  
 Optimizer Mode : Enabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost.localdomain Mon Nov 14 18:41:45 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

physical 1: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
BIOS Model name:        Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
Stepping:               6
CPU MHz:                3200.000
CPU max MHz:            3200.0000
CPU min MHz:            800.0000
BogoMIPS:               4000.00
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               49152K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,124
NUMA node1 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,126
NUMA node2 CPU(s):

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: May-2022

## Platform Notes (Continued)

1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125

NUMA node3 CPU(s):

3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,115,119,123,127

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds\_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid fsrm md\_clear pconfig flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 49152 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108 112 116 120 124
node 0 size: 128153 MB
node 0 free: 115829 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110 114 118 122 126
node 1 size: 129016 MB
node 1 free: 120715 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109 113 117 121 125
node 2 size: 128975 MB
node 2 free: 120735 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111 115 119 123 127
node 3 size: 129014 MB
node 3 free: 122216 MB
node distances:
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 527523228 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"  
VERSION="8.6 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.6"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"  
ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8::baseos

uname -a:

Linux localhost.localdomain 4.18.0-372.9.1.el8.x86\_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Platform Notes (Continued)

run-level 3 Nov 14 15:52

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	80G	29G	52G	36%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
Vendor:      Dell Inc.
Product:    PowerEdge R750
Product Family: PowerEdge
Serial:     SLR7598
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x 002C00B3002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
2x 002C0632002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
1x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200
5x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200
```

BIOS:

```
BIOS Vendor:    Dell Inc.
BIOS Version:   1.7.5
BIOS Date:     09/14/2022
BIOS Revision: 1.7
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++       | 508.namd_r(base) 510.parest_r(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 461

PowerEdge R750 (Intel Xeon Gold 6338, 2.00 GHz)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-14 19:41:44-0500.

Report generated on 2022-12-07 10:44:25 by CPU2017 PDF formatter v6442.

Originally published on 2022-12-06.