



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

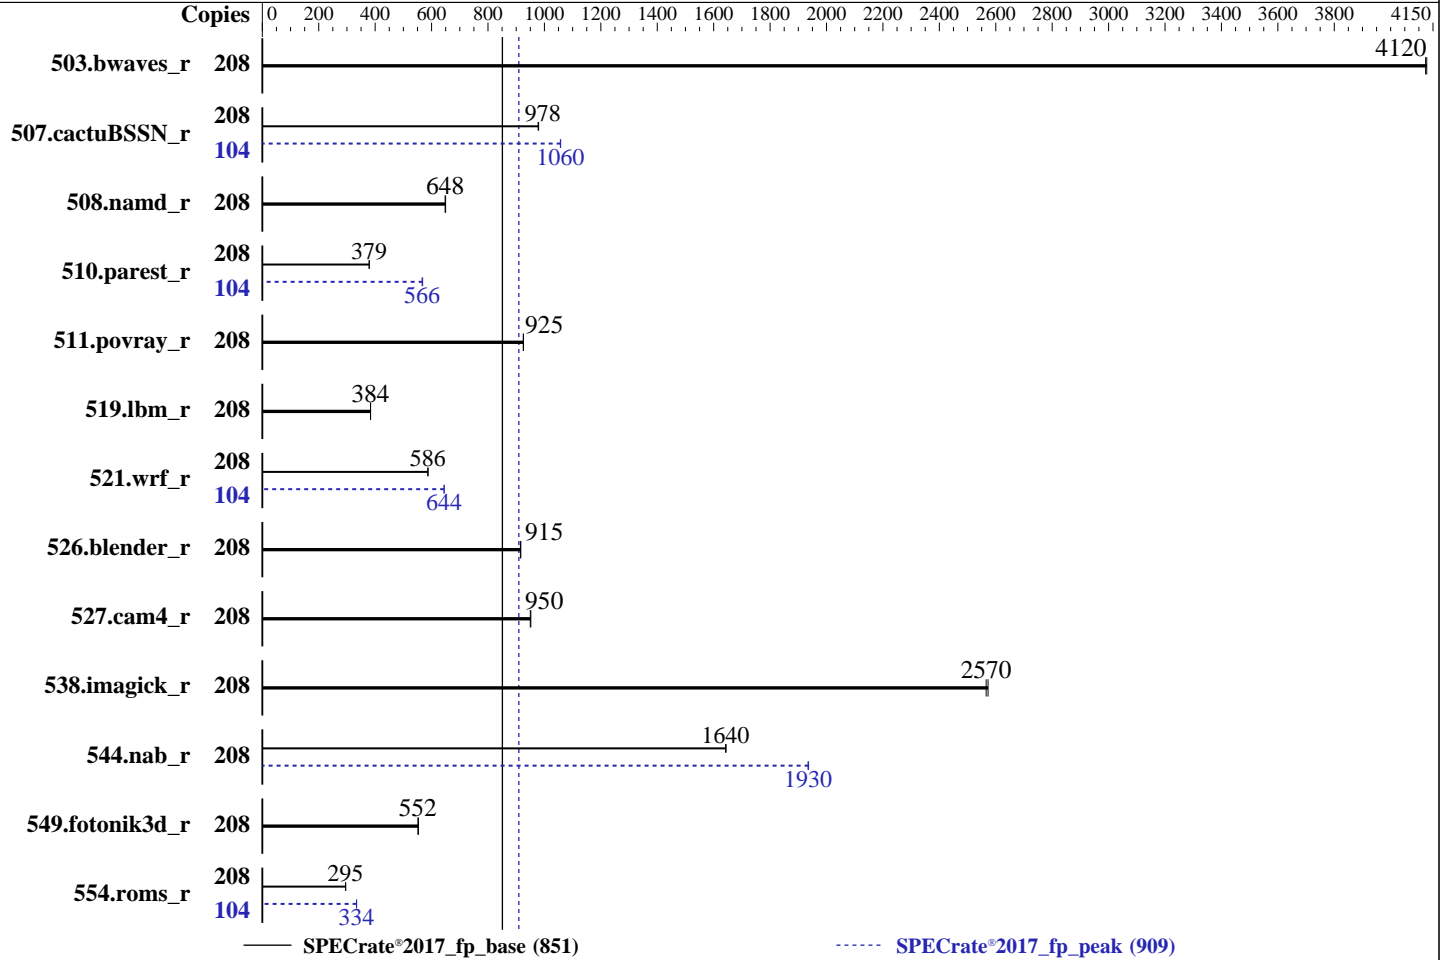

Hardware

CPU Name: Intel Xeon Platinum 8470N
 Max MHz: 3600
 Nominal: 1700
 Enabled: 104 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 97.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 0.3.1 released Nov-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	506	4120	505	4130			208	506	4120	505	4130		
507.cactuBSSN_r	208	269	978	269	979			104	125	1060	124	1060		
508.namd_r	208	304	650	305	648			208	304	650	305	648		
510.parest_r	208	1435	379	1437	379			104	479	568	480	566		
511.povray_r	208	525	926	525	925			208	525	926	525	925		
519.lbm_r	208	571	384	571	384			208	571	384	571	384		
521.wrf_r	208	793	588	795	586			104	362	644	361	645		
526.blender_r	208	346	915	346	916			208	346	915	346	916		
527.cam4_r	208	383	950	382	952			208	383	950	382	952		
538.imagick_r	208	201	2570	202	2570			208	201	2570	202	2570		
544.nab_r	208	213	1640	213	1640			208	181	1930	181	1940		
549.fotonik3d_r	208	1470	552	1465	553			208	1470	552	1465	553		
554.roms_r	208	1118	296	1120	295			104	495	334	494	334		

SPECrate®2017_fp_base = **851**

SPECrate®2017_fp_peak = **909**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

General Notes (Continued)

Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
Uncorrectable Memory Error : Disabled
Virtualization Technology : Disabled
      Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      C1E : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Jan 10 16:21:21 2023

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
16:21:21 up 4:51, 1 user, load average: 140.79, 191.83, 201.23
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    -             11:31      4:49m    1.42s    0.00s    /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,text --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124418
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124418
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
  --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8470N
vendor_id      : GenuineIntel
cpu family     : 6
model         : 143
stepping      : 8

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

microcode : 0x2b000111
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 52
siblings : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 208
On-line CPU(s) list: 0-207
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8470N
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 52
Socket(s): 2
Stepping: 8
BogoMIPS: 3400.00

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

                                tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities
Lld cache:                      4.9 MiB (104 instances)
Lli cache:                      3.3 MiB (104 instances)
L2 cache:                       208 MiB (104 instances)
L3 cache:                       195 MiB (2 instances)
NUMA node(s):                   8
NUMA node0 CPU(s):              0,4,8,12,16,20,24,28,32,36,40,44,48,104,108,112,116,120,124,128,132,136,140,144,148,152
NUMA node1 CPU(s):              52,56,60,64,68,72,76,80,84,88,92,96,100,156,160,164,168,172,176,180,184,188,192,196,200,204
NUMA node2 CPU(s):              2,6,10,14,18,22,26,30,34,38,42,46,50,106,110,114,118,122,126,130,134,138,142,146,150,154
NUMA node3 CPU(s):              54,58,62,66,70,74,78,82,86,90,94,98,102,158,162,166,170,174,178,182,186,190,194,198,202,206
NUMA node4 CPU(s):              1,5,9,13,17,21,25,29,33,37,41,45,49,105,109,113,117,121,125,129,133,137,141,145,149,153
NUMA node5 CPU(s):              53,57,61,65,69,73,77,81,85,89,93,97,101,157,161,165,169,173,177,181,185,189,193,197,201,205
NUMA node6 CPU(s):              3,7,11,15,19,23,27,31,35,39,43,47,51,107,111,115,119,123,127,131,135,139,143,147,151,155
NUMA node7 CPU(s):              55,59,63,67,71,75,79,83,87,91,95,99,103,159,163,167,171,175,179,183,187,191,195,199,203,207
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:             Not affected
Vulnerability Mds:              Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:       Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	4.9M	12	Data	1	64	1	64
Lli	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	97.5M	195M	15	Unified	3	106496	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,104,108,112,116,120,124,128,132,136,140,144,148,152

node 0 size: 128397 MB

node 0 free: 113304 MB

node 1 cpus: 52,56,60,64,68,72,76,80,84,88,92,96,100,156,160,164,168,172,176,180,184,188,192,196,200,204

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

node 1 size: 128982 MB
node 1 free: 118500 MB
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,106,110,114,118,122,126,130,134,138,142,146,150,154
node 2 size: 129017 MB
node 2 free: 118604 MB
node 3 cpus: 54,58,62,66,70,74,78,82,86,90,94,98,102,158,162,166,170,174,178,182,186,190,194,198,202,206
node 3 size: 129017 MB
node 3 free: 118632 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,105,109,113,117,121,125,129,133,137,141,145,149,153
node 4 size: 129017 MB
node 4 free: 111219 MB
node 5 cpus: 53,57,61,65,69,73,77,81,85,89,93,97,101,157,161,165,169,173,177,181,185,189,193,197,201,205
node 5 size: 129017 MB
node 5 free: 118708 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,107,111,115,119,123,127,131,135,139,143,147,151,155
node 6 size: 129017 MB
node 6 free: 118690 MB
node 7 cpus: 55,59,63,67,71,75,79,83,87,91,95,99,103,159,163,167,171,175,179,183,187,191,195,199,203,207
node 7 size: 128659 MB
node 7 free: 118315 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 21 21 21 21
  1:  12 10 12 12 21 21 21 21
  2:  12 12 10 12 21 21 21 21
  3:  12 12 12 10 21 21 21 21
  4:  21 21 21 21 10 12 12 12
  5:  21 21 21 21 12 10 12 12
  6:  21 21 21 21 12 12 10 12
  7:  21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1055873788 kB

```

```

-----
10. who -r
run-level 3 Jan 10 11:31

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

enabled      apparmor auditd cron firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump
              kdump-early lvm2-monitor postfix purge-kernels rollback sshd wicked wickedd-auto4
              wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled     blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
              ebttables grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs
              nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
              systemd-boot-check-no-failures systemd-network-generator systemd-sysext
              systemd-time-wait-sync systemd-timesyncd
indirect     wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3b24f3a7-eacd-4a3a-aef5-ee833c654599
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=311M,high
crashkernel=72M,low

```

```

-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 125G 82G 44G 66% /mnt/ramdisk

19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge C6620
Product Family: PowerEdge
Serial: SL6C201

20. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
15x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Platform Notes (Continued)

BIOS Version: 0.3.1
BIOS Date: 11/24/2022
BIOS Revision: 0.3

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Compiler Version Notes (Continued)

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

544.nab_r (continued):

```
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 851

PowerEdge C6620 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 909

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-10 16:21:20-0500.

Report generated on 2023-02-01 18:32:21 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.