



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

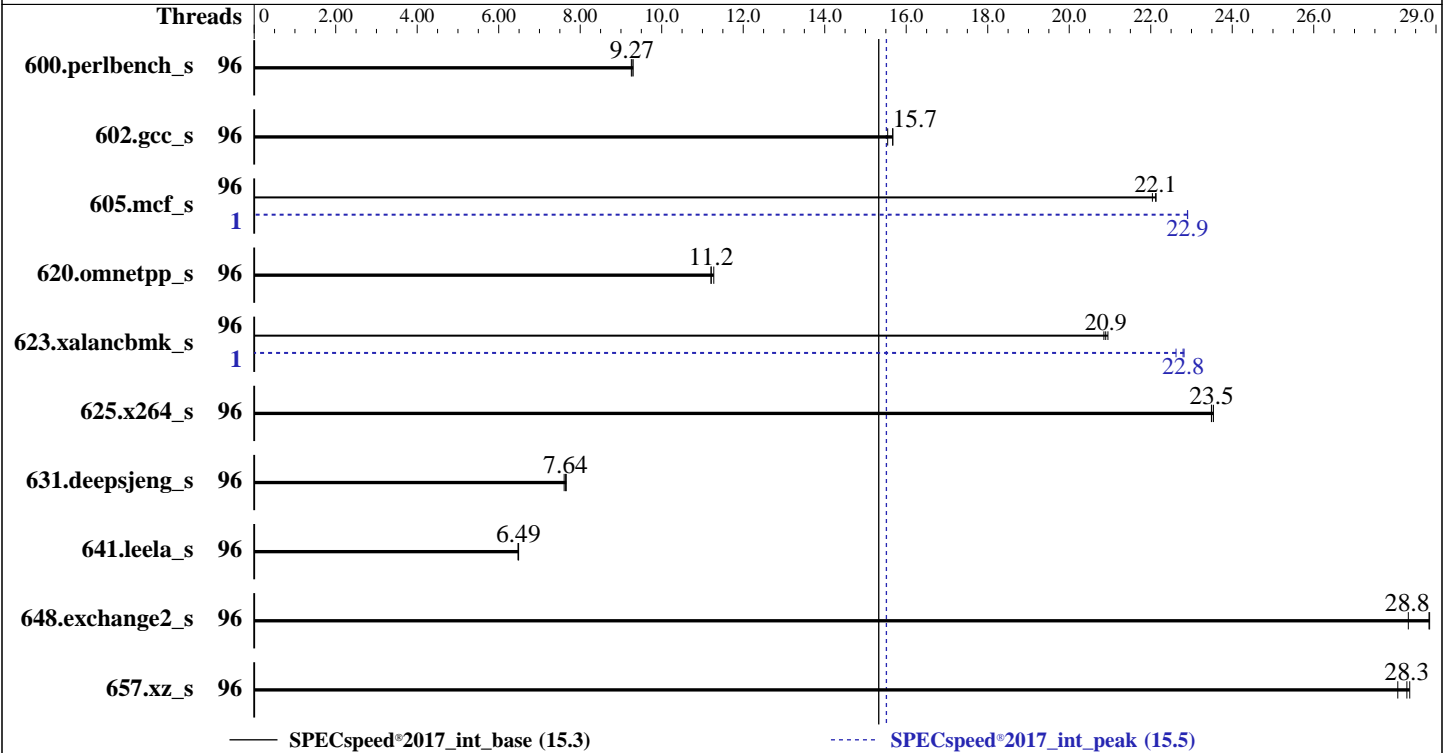

### Hardware

CPU Name: AMD EPYC 9474F  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 96 cores, 2 chips  
 Orderable: 2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 6 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 3.84 TB NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version QGE109D 1.20 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	<b>191</b>	<b>9.27</b>	191	9.30	192	9.25	96	<b>191</b>	<b>9.27</b>	191	9.30	192	9.25
602.gcc_s	96	<b>254</b>	<b>15.7</b>	256	15.5	254	15.7	96	<b>254</b>	<b>15.7</b>	256	15.5	254	15.7
605.mcf_s	96	213	22.1	214	22.0	<b>213</b>	<b>22.1</b>	1	206	22.9	<b>206</b>	<b>22.9</b>	206	22.9
620.omnetpp_s	96	145	11.2	<b>145</b>	<b>11.2</b>	145	11.3	96	145	11.2	<b>145</b>	<b>11.2</b>	145	11.3
623.xalancbmk_s	96	67.6	20.9	<b>67.8</b>	<b>20.9</b>	68.0	20.9	1	<b>62.2</b>	<b>22.8</b>	62.6	22.6	62.1	22.8
625.x264_s	96	75.1	23.5	<b>75.1</b>	<b>23.5</b>	74.9	23.5	96	75.1	23.5	<b>75.1</b>	<b>23.5</b>	74.9	23.5
631.deepsjeng_s	96	187	7.66	188	7.61	<b>188</b>	<b>7.64</b>	96	187	7.66	188	7.61	<b>188</b>	<b>7.64</b>
641.leela_s	96	<b>263</b>	<b>6.49</b>	264	6.47	263	6.49	96	<b>263</b>	<b>6.49</b>	264	6.47	263	6.49
648.exchange2_s	96	<b>102</b>	<b>28.8</b>	104	28.3	102	28.8	96	<b>102</b>	<b>28.8</b>	104	28.3	102	28.8
657.xz_s	96	218	28.4	<b>219</b>	<b>28.3</b>	220	28.1	96	218	28.4	<b>219</b>	<b>28.3</b>	220	28.1

SPECspeed®2017\_int\_base = **15.3**

SPECspeed®2017\_int\_peak = **15.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

### Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.9-amd-aocc400-genoa-B1b/amd\_speed\_aocc400\_genoa\_B\_lib  
/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4  
SMT Mode set to Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 15.3

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-genoa-B1b/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Jan 31 21:47:51 2023

SUT (System Under Test) info as seen by some common utilities.

#### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
 21:47:51 up 2 min,  1 user,  load average: 0.13, 0.07, 0.02
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1    -             21:45      13.00s    0.98s   0.08s /bin/bash ./amd_speed_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER:  root
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size          (kbytes, -d) unlimited
   scheduling priority      (-e) 0
   file size              (blocks, -f) unlimited
   pending signals        (-i) 3094046
   max locked memory      (kbytes, -l) 2097152
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 3094046
   virtual memory         (kbytes, -v) unlimited
   file locks            (-x) unlimited

```

```

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   /bin/bash ./run_SD665V3_genoa.sh
   /bin/bash ./Run035-compliant-amd-speedint.sh
   python3 ./run_amd_speed_aocc400_genoa_B1.py
   /bin/bash ./amd_speed_aocc400_genoa_B1.sh
   runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeak
   runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.003/templogs/preenv.intspeak.003.0.log --lognum 003.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017-1.1.9-amd-aocc400-genoa-B1b

```

```

6. /proc/cpuinfo
   model name      : AMD EPYC 9474F 48-Core Processor
   vendor_id      : AuthenticAMD
   cpu family     : 25
   model         : 17
   stepping      : 1
   microcode     : 0xa101111
   bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size      : 3584 4K pages
   cpu cores     : 48

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

siblings          : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: core ids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9474F 48-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    1
Core(s) per socket:    48
Socket(s):              2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           4113.2808
CPU min MHz:           1500.0000
BogoMIPS:              7200.03

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 15.3

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

```

Virtualization:                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V
L1d cache:                                     3 MiB (96 instances)
L1i cache:                                     3 MiB (96 instances)
L2 cache:                                       96 MiB (96 instances)
L3 cache:                                       512 MiB (16 instances)
NUMA node(s):                                  8
NUMA node0 CPU(s):                             0-11
NUMA node1 CPU(s):                             12-23
NUMA node2 CPU(s):                             24-35
NUMA node3 CPU(s):                             36-47
NUMA node4 CPU(s):                             48-59
NUMA node5 CPU(s):                             60-71
NUMA node6 CPU(s):                             72-83
NUMA node7 CPU(s):                             84-95
Vulnerability Itlb multihit:                   Not affected
Vulnerability L1tf:                             Not affected
Vulnerability Mds:                             Not affected
Vulnerability Meltdown:                       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:                       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:                       Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling
Vulnerability Srbds:                           Not affected
Vulnerability Tsx async abort:                 Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11
node 0 size: 96504 MB
node 0 free: 94944 MB
node 1 cpus: 12-23
node 1 size: 96752 MB
node 1 free: 96418 MB
node 2 cpus: 24-35
node 2 size: 96717 MB
node 2 free: 96408 MB
node 3 cpus: 36-47

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

node 3 size: 96752 MB
node 3 free: 96430 MB
node 4 cpus: 48-59
node 4 size: 96752 MB
node 4 free: 96508 MB
node 5 cpus: 60-71
node 5 size: 96752 MB
node 5 free: 96498 MB
node 6 cpus: 72-83
node 6 size: 96752 MB
node 6 free: 96555 MB
node 7 cpus: 84-95
node 7 size: 96553 MB
node 7 free: 96352 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
  4:  32 32 32 32 10 12 12 12
  5:  32 32 32 32 12 10 12 12
  6:  32 32 32 32 12 12 10 12
  7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:          792100484 kB

```

```

-----
10. who -r
    run-level 3 Jan 31 21:45

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
                   purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9967e7c1-1dd8-42c0-9234-ca3fa2c502ae
splash=silent
mitigations=auto
quiet
security=apparmor

```

-----  
14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.60 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

vm.zone\_reclaim\_mode 1

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-genoa-Blb
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 3.5T 119G 3.4T 4% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SD665 V3
Product Family: ThinkSystem
Serial: 1234567890
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
3x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
4x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800
17x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: QGE109D-1.20  
BIOS Date: 01/19/2023  
BIOS Revision: 1.20  
Firmware Revision: 0.90

## Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====
```

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-31 08:47:51-0500.

Report generated on 2023-03-02 11:23:45 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.