



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2023

Hardware Availability: Apr-2022

Software Availability: May-2022

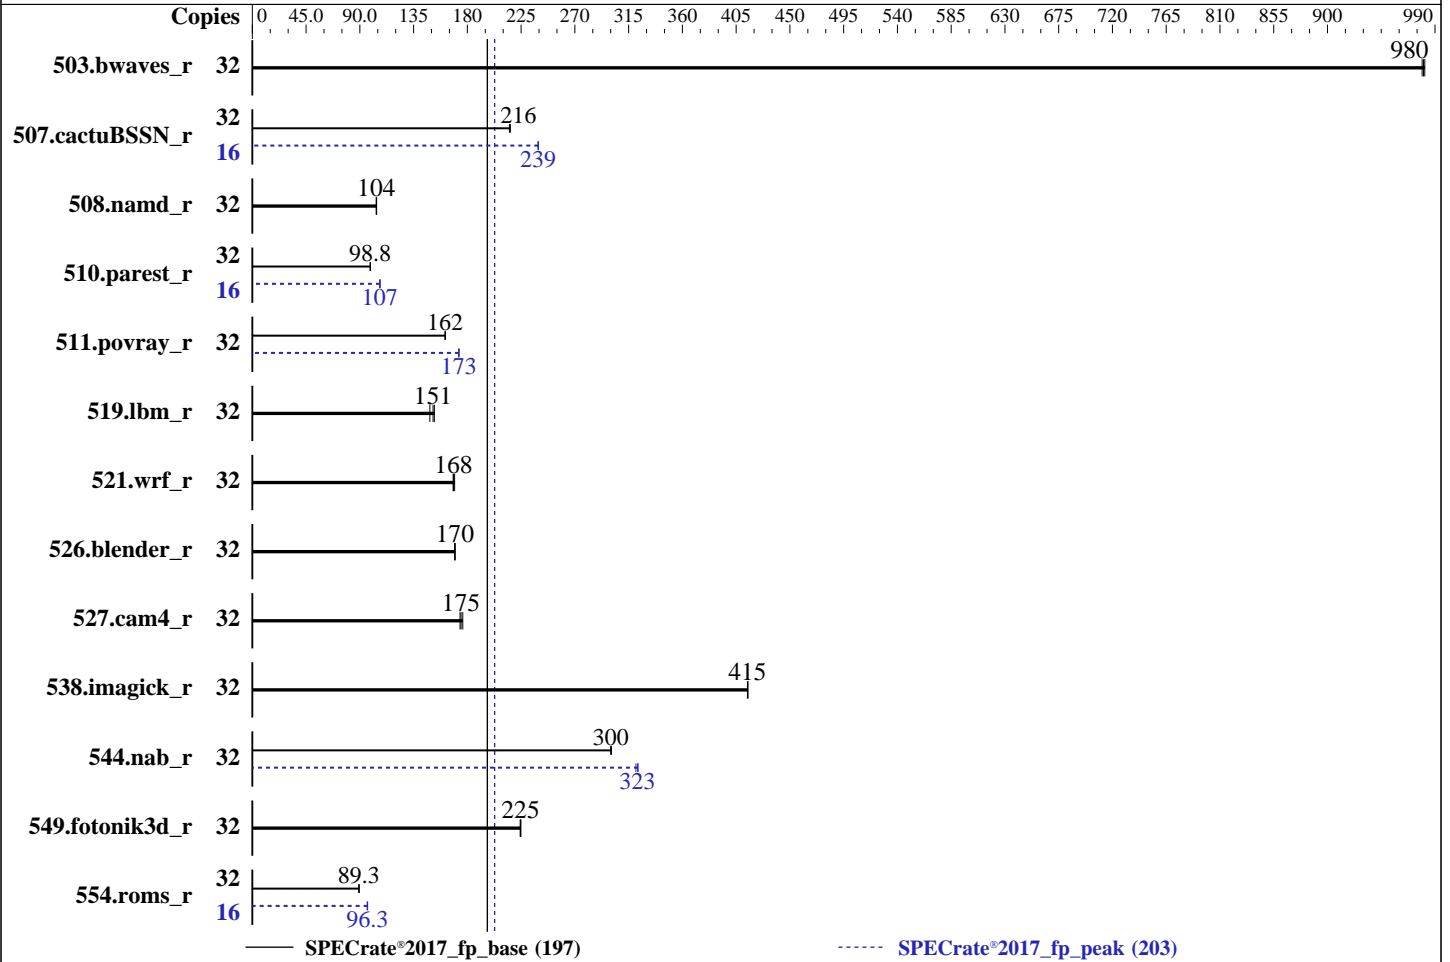

## Hardware

CPU Name: Intel Xeon Gold 5315Y  
 Max MHz: 3600  
 Nominal: 3200  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0802 released Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	328	979	327	981	<b><u>327</u></b>	<b><u>980</u></b>	32	328	979	327	981	<b><u>327</u></b>	<b><u>980</u></b>
507.cactuBSSN_r	32	188	215	<b><u>188</u></b>	<b><u>216</u></b>	188	216	16	<b><u>84.6</u></b>	<b><u>239</u></b>	84.7	239	84.6	239
508.namd_r	32	292	104	<b><u>293</u></b>	<b><u>104</u></b>	293	104	32	292	104	<b><u>293</u></b>	<b><u>104</u></b>	293	104
510.parest_r	32	848	98.7	847	98.8	<b><u>848</u></b>	<b><u>98.8</u></b>	16	392	107	392	107	<b><u>392</u></b>	<b><u>107</u></b>
511.povray_r	32	463	161	463	162	<b><u>463</u></b>	<b><u>162</u></b>	32	432	173	432	173	<b><u>432</u></b>	<b><u>173</u></b>
519.lbm_r	32	221	152	<b><u>223</u></b>	<b><u>151</u></b>	227	149	32	221	152	<b><u>223</u></b>	<b><u>151</u></b>	227	149
521.wrf_r	32	<b><u>425</u></b>	<b><u>168</u></b>	423	169	426	168	32	<b><u>425</u></b>	<b><u>168</u></b>	423	169	426	168
526.blender_r	32	288	169	<b><u>287</u></b>	<b><u>170</u></b>	287	170	32	288	169	<b><u>287</u></b>	<b><u>170</u></b>	287	170
527.cam4_r	32	322	174	318	176	<b><u>320</u></b>	<b><u>175</u></b>	32	322	174	318	176	<b><u>320</u></b>	<b><u>175</u></b>
538.imagick_r	32	192	414	192	415	<b><u>192</u></b>	<b><u>415</u></b>	32	192	414	192	415	<b><u>192</u></b>	<b><u>415</u></b>
544.nab_r	32	<b><u>179</u></b>	<b><u>300</u></b>	179	300	179	301	32	168	321	<b><u>167</u></b>	<b><u>323</u></b>	167	323
549.fotonik3d_r	32	556	224	<b><u>555</u></b>	<b><u>225</u></b>	555	225	32	556	224	<b><u>555</u></b>	<b><u>225</u></b>	555	225
554.roms_r	32	570	89.2	569	89.4	<b><u>570</u></b>	<b><u>89.3</u></b>	16	<b><u>264</u></b>	<b><u>96.3</u></b>	264	96.2	263	96.5

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 203

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Patrol Scrub = Disabled  
Engine Boost = Aggressive  
SR-IOV Support = Disabled  
BMC Configuration:  
Fan mode = Full speed mode

```
Sysinfo program /home/ic22u1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Feb 11 13:28:14 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.el8\_4.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
13:28:14 up 1 day, 8:30, 1 user, load average: 20.68, 29.25, 31.01
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU WHAT
root      tty1    -             Fri04      32:29m 1.15s  0.01s /bin/bash ./rate.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126725
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126725
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.331/templogs/preenv.fprate.331.0.log --lognum 331.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/ic22u1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5315Y CPU @ 3.20GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd000331
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```

From lscpu from util-linux 2.32.1:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          32
On-line CPU(s) list: 0-31

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5315Y CPU @ 3.20GHz
BIOS Model name: Intel(R) Xeon(R) Gold 5315Y CPU @ 3.20GHz
Stepping: 6
CPU MHz: 857.507
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 6400.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 12288K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 515631 MB
node 0 free: 503340 MB
node 1 cpus: 8-15,24-31
node 1 size: 516089 MB
node 1 free: 507795 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

```
node    0    1
0:      10   20
1:      20   10
```

9. /proc/meminfo  
MemTotal: 1056482480 kB

10. who -r  
run-level 3 Feb 10 04:58

11. Systemd service manager version: systemd 239 (239-45.el8\_4.3)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog sysstat timedatex tuned udisks2 vdo
disabled	arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables fancontrol grafana-server iprdump iprinit iprupdate ipsec iscsid iscsiuiop kpatch kvm_stat ledmon nftables nis-domainname nvme-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@ systemd-resolved tcstd
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked	systemd-timedated

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8\_4.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.60 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance  
-----

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_swap 64

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

**SPECrate®2017\_fp\_base = 197**  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 8.4 (Ootpa)  
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)  
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

### 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

itlb\_multihit Not affected  
lltf Not affected  
mds Not affected  
meltdown Not affected  
spec\_store\_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
spectre\_v1 Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization  
spectre\_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
srbds Not affected  
tsx\_async\_abort Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

### 21. Disk information

SPEC is set to: /home/ic22u1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 878G 137G 742G 16% /home

### 22. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
Product: RS720-E10-RS12  
Product Family: Server  
Serial: 012345678901

### 23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2933

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Platform Notes (Continued)

-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0802  
BIOS Date: 04/29/2022  
BIOS Revision: 8.2

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
**SPECrate®2017\_fp\_peak = 203**

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both C and C++:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

544.nab\_r (continued):

```
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720-E10-RS12(Z12PP-D32) Server System  
(3.20 GHz, Intel Xeon Gold 5315Y)

SPECrate®2017\_fp\_base = 197  
SPECrate®2017\_fp\_peak = 203

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):  
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html)  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

You can also download the XML flags sources by saving the following links:  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml)  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-11 13:28:13-0500.  
Report generated on 2023-03-15 10:17:17 by CPU2017 PDF formatter v6442.  
Originally published on 2023-03-14.