



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594
SPECrate®2017_int_peak = 617

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

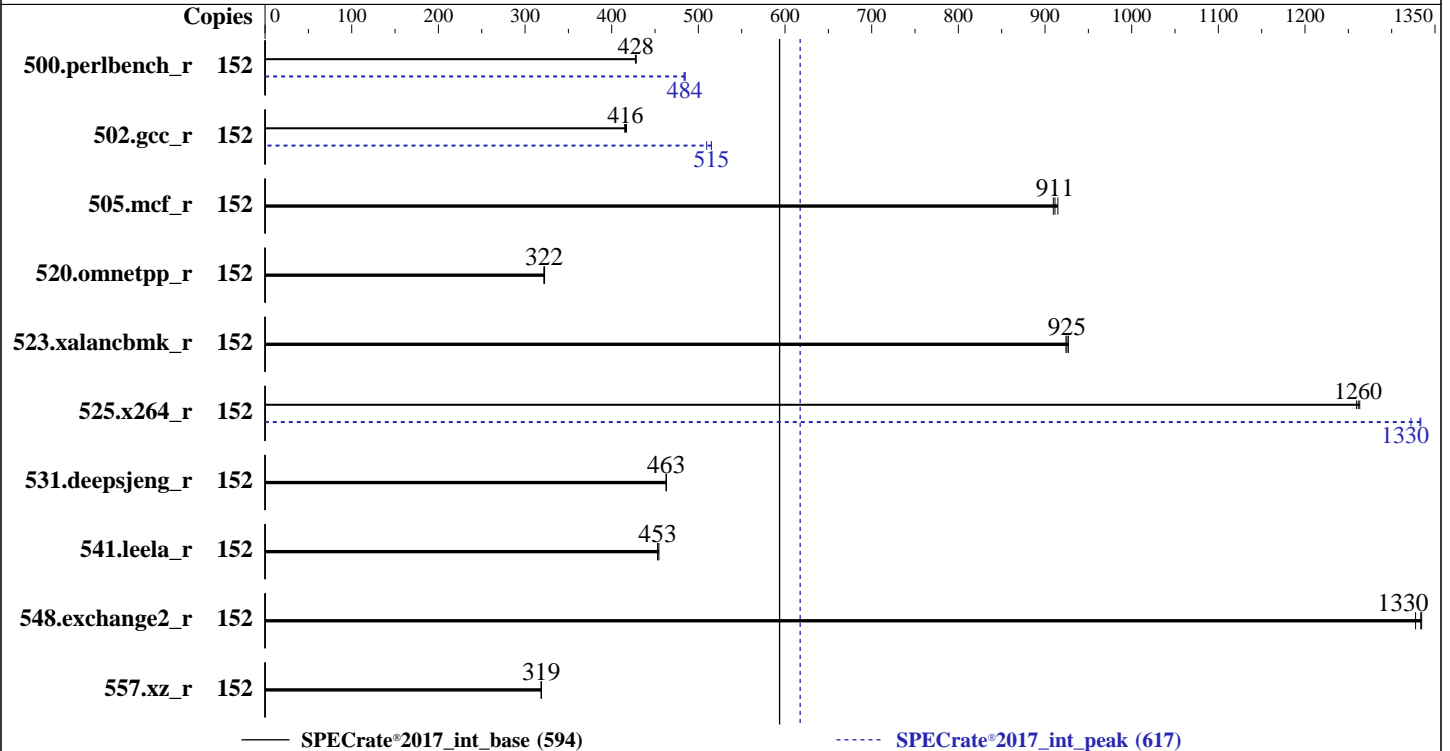

Hardware

CPU Name: Intel Xeon Platinum 8368
 Max MHz: 3400
 Nominal: 2400
 Enabled: 76 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 57 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa)
 4.18.0-305.25.1.el8_4.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 0802 released Apr-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	152	565	428	565	428	566	427	152	499	485	500	484	501	483
502.gcc_r	152	516	417	517	416	519	415	152	418	515	418	515	422	510
505.mcf_r	152	269	915	269	911	270	910	152	269	915	269	911	270	910
520.omnetpp_r	152	619	322	618	323	620	322	152	619	322	618	323	620	322
523.xalancbmk_r	152	173	925	173	927	174	924	152	173	925	173	927	174	924
525.x264_r	152	211	1260	211	1260	211	1260	152	200	1330	200	1330	201	1320
531.deepsjeng_r	152	376	463	376	463	376	463	152	376	463	376	463	376	463
541.leela_r	152	556	453	554	454	555	453	152	556	453	554	454	555	453
548.exchange2_r	152	298	1330	299	1330	300	1330	152	298	1330	299	1330	300	1330
557.xz_r	152	515	319	515	319	515	319	152	515	319	515	319	515	319

SPECrate®2017_int_base = **594**

SPECrate®2017_int_peak = **617**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/ic23/lib/intel64:/home/ic23/lib/ia32:/home/ic23/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
Engine Boost = Aggressive
SR-IOV Support = Disabled
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /home/ic23/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Mar 13 12:45:03 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.el8_4.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Platform Notes (Continued)

22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

2. w
12:45:03 up 0 min, 1 user, load average: 0.21, 0.07, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttyl - 12:44 7.00s 1.21s 0.00s /bin/bash ./rate.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126615
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126615
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=152 -c
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=76 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=152 --configfile
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=76 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.058/temlogs/preenv.intrate.058.0.log --lognum 058.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/ic23

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8368 CPU @ 2.40GHz

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

```
vendor_id      : GenuineIntel
cpu family     : 6
model         : 106
stepping      : 6
microcode     : 0xd000331
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 38
siblings      : 76
2 physical ids (chips)
152 processors (hardware threads)
physical id 0: core ids 0-37
physical id 1: core ids 0-37
physical id 0: apicids 0-75
physical id 1: apicids 128-203
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                152
On-line CPU(s) list:   0-151
Thread(s) per core:    2
Core(s) per socket:    38
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Platinum 8368 CPU @ 2.40GHz
BIOS Model name:      Intel(R) Xeon(R) Platinum 8368 CPU @ 2.40GHz
Stepping:              6
CPU MHz:               1093.567
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              58368K
NUMA node0 CPU(s):    0-37,76-113
NUMA node1 CPU(s):    38-75,114-151
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_llid arch_capabilities

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-37,76-113
node 0 size: 515618 MB
node 0 free: 514570 MB
node 1 cpus: 38-75,114-151
node 1 size: 516075 MB
node 1 free: 515418 MB
node distances:
node  0  1
  0: 10  20
  1: 20  10
```

9. /proc/meminfo

```
MemTotal: 1056454464 kB
```

10. who -r

```
run-level 3 Mar 13 12:44
```

11. Systemd service manager version: systemd 239 (239-45.el8_4.3)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
libstoragemgmt lm_sensors loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd
sssd syslog sysstat timedatex tuned udisks2 vdo
disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables fancontrol
grafana-server iprdump iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon nftables
nis-domainname nvme-autoconnect oddjobd pmfind pmie_check pmlogger_check pmlogger_daily_report
pmlogger_daily_report-poll pmproxy podman-auto-update postfix powertop psacct ras-mc-ctl
rasdaemon rdisc rhcd rhsm rhsm-facts rrdcached saslauthd serial-getty@ sshd-keygen@
systemd-resolved tcsd
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.25.1.el8_4.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.40 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 0
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594
SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Platform Notes (Continued)

lltf	Not affected
mds	Not affected
meltdown	Not affected
spec_store_bypass	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbsds	Not affected
tsx_async_abort	Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information
SPEC is set to: /home/ic23

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	878G	124G	755G	15%	/home

22. /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS720-E10-RS12
Product Family:	Server
Serial:	012345678901

23. dmidecode
Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

24. BIOS
(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0802
BIOS Date:	04/29/2022
BIOS Revision:	8.2

Compiler Version Notes

=====

C	502.gcc_r(peak)
---	-----------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
	557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594
SPECrate®2017_int_peak = 617

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Jul-2021
Software Availability: Dec-2022

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS RS720-E10-RS12(Z12PP-D32) Server System
(2.40 GHz, Intel Xeon Platinum 8368)

SPECrate®2017_int_base = 594

SPECrate®2017_int_peak = 617

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Jul-2021

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-13 12:45:03-0400.

Report generated on 2024-01-29 17:32:46 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-14.