



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11


(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

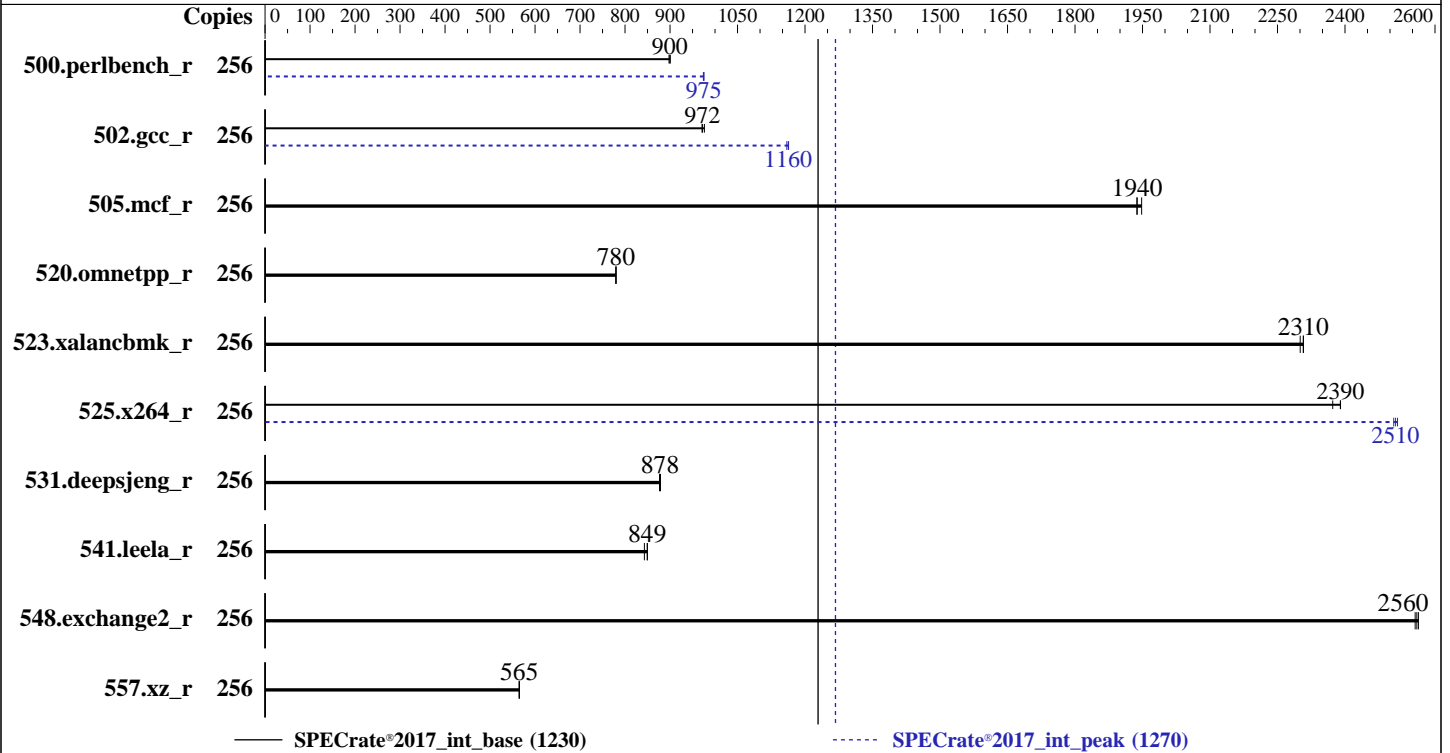

Hardware

CPU Name: Intel Xeon Gold 6448H
Max MHz: 4100
Nominal: 2400
Enabled: 128 cores, 4 chips, 2 threads/core
Orderable: 1, 2, 4 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: Ubuntu 22.04.1 LTS
Kernel 5.15.0-69-generic
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	453	900	453	900	454	898	256	418	974	418	975	418	975
502.gcc_r	256	373	971	371	976	373	972	256	312	1160	313	1160	312	1160
505.mcf_r	256	212	1950	214	1940	213	1940	256	212	1950	214	1940	213	1940
520.omnetpp_r	256	431	780	431	780	431	780	256	431	780	431	780	431	780
523.xalancbmk_r	256	117	2310	117	2310	118	2300	256	117	2310	117	2310	118	2300
525.x264_r	256	188	2390	188	2390	189	2370	256	179	2510	178	2510	178	2520
531.deepsjeng_r	256	335	877	334	878	334	879	256	335	877	334	878	334	879
541.leela_r	256	499	849	503	843	499	849	256	499	849	503	843	499	849
548.exchange2_r	256	262	2560	262	2560	262	2560	256	262	2560	262	2560	262	2560
557.xz_r	256	490	565	489	565	489	565	256	490	565	489	565	489	565

SPECrate®2017_int_base = **1230**

SPECrate®2017_int_peak = **1270**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Accelerator-Performance using "tuned-adm profile accelerator-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Gold 6448H Processor
BIOS Configuration
Workload Profile set to General Throughput Compute
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Intel UPI Link Power Management set to Enabled
Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State
The reported date by sysinfo is incorrect due to computer clock being not set correctly.
The correct test date is: Apr-2023

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on admin1 Thu Mar 2 13:11:42 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

Platform Notes (Continued)

- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux admin1 5.15.0-69-generic #76-Ubuntu SMP Fri Mar 17 17:19:29 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:11:42 up 13 min,  3 users,  load average: 0.03, 0.04, 0.04
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
admin1    tty1    -                13:05    6:38   0.02s  0.00s  -bash
admin1    pts/0   172.16.0.100    13:05    6:05   0.02s  0.00s  sshd: admin1 [priv]
admin1    pts/1   172.16.0.100    13:05    6.00s  1.02s  0.01s  sudo -i
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      admin1
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 132053836
process            4126226
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo -i
sudo -i
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/temlogs/preenv.intrate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 64
4 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6448H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 4
Stepping: 7
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Platform Notes (Continued)

```
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpcmlmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
arch_capabilities
```

```
Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 240 MiB (4 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 128603 MB
node 0 free: 127591 MB
node 1 cpus: 16-31,144-159
node 1 size: 129016 MB
node 1 free: 128442 MB
node 2 cpus: 32-47,160-175
node 2 size: 129016 MB
node 2 free: 128689 MB
node 3 cpus: 48-63,176-191
node 3 size: 129016 MB
node 3 free: 128648 MB
node 4 cpus: 64-79,192-207
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Platform Notes (Continued)

```

node 4 size: 129016 MB
node 4 free: 128671 MB
node 5 cpus: 80-95,208-223
node 5 size: 129016 MB
node 5 free: 128622 MB
node 6 cpus: 96-111,224-239
node 6 size: 129016 MB
node 6 free: 128550 MB
node 7 cpus: 112-127,240-255
node 7 size: 128969 MB
node 7 free: 128438 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  20  30  30  30  30  30  30
1:  20  10  30  30  30  30  30  30
2:  30  30  10  20  30  30  30  30
3:  30  30  20  10  30  30  30  30
4:  30  30  30  30  10  20  30  30
5:  30  30  30  30  20  10  30  30
6:  30  30  30  30  30  30  10  20
7:  30  30  30  30  30  30  20  10

```

```

9. /proc/meminfo
MemTotal:      1056430708 kB

```

```

10. who -r
run-level 5 Mar 2 13:00

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
Default Target    Status
graphical         degraded

```

```

12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

```

13. Services, from systemctl list-unit-files
STATE    UNIT FILES
enabled  ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled  console-getty debug-shell iscsid nftables powertop rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated  apport
indirect   uuuid
masked    cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-5.15.0-69-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

15. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

16. tuned-adm active

```
Current active profile: accelerator-performance
```

17. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

18. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvise [madvise] never
enabled         always [madvise] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

20. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.1 LTS
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

Platform Notes (Continued)

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	347G	71G	84%	/

22. /sys/devices/virtual/dmi/id

Vendor: HPE
 Product: ProLiant DL560 Gen11
 Product Family: ProLiant
 Serial: CNX2250G5V

23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
 29x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800
 32x UNKNOWN NOT AVAILABLE

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
 BIOS Version: 1.30
 BIOS Date: 03/01/2023
 BIOS Revision: 1.30
 Firmware Revision: 1.30

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Compiler Version Notes (Continued)

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: May-2023
Software Availability: Mar-2023

Peak Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1230

SPECrate®2017_int_peak = 1270

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Mar-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-02 08:11:42-0500.

Report generated on 2024-01-29 17:43:56 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.