



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

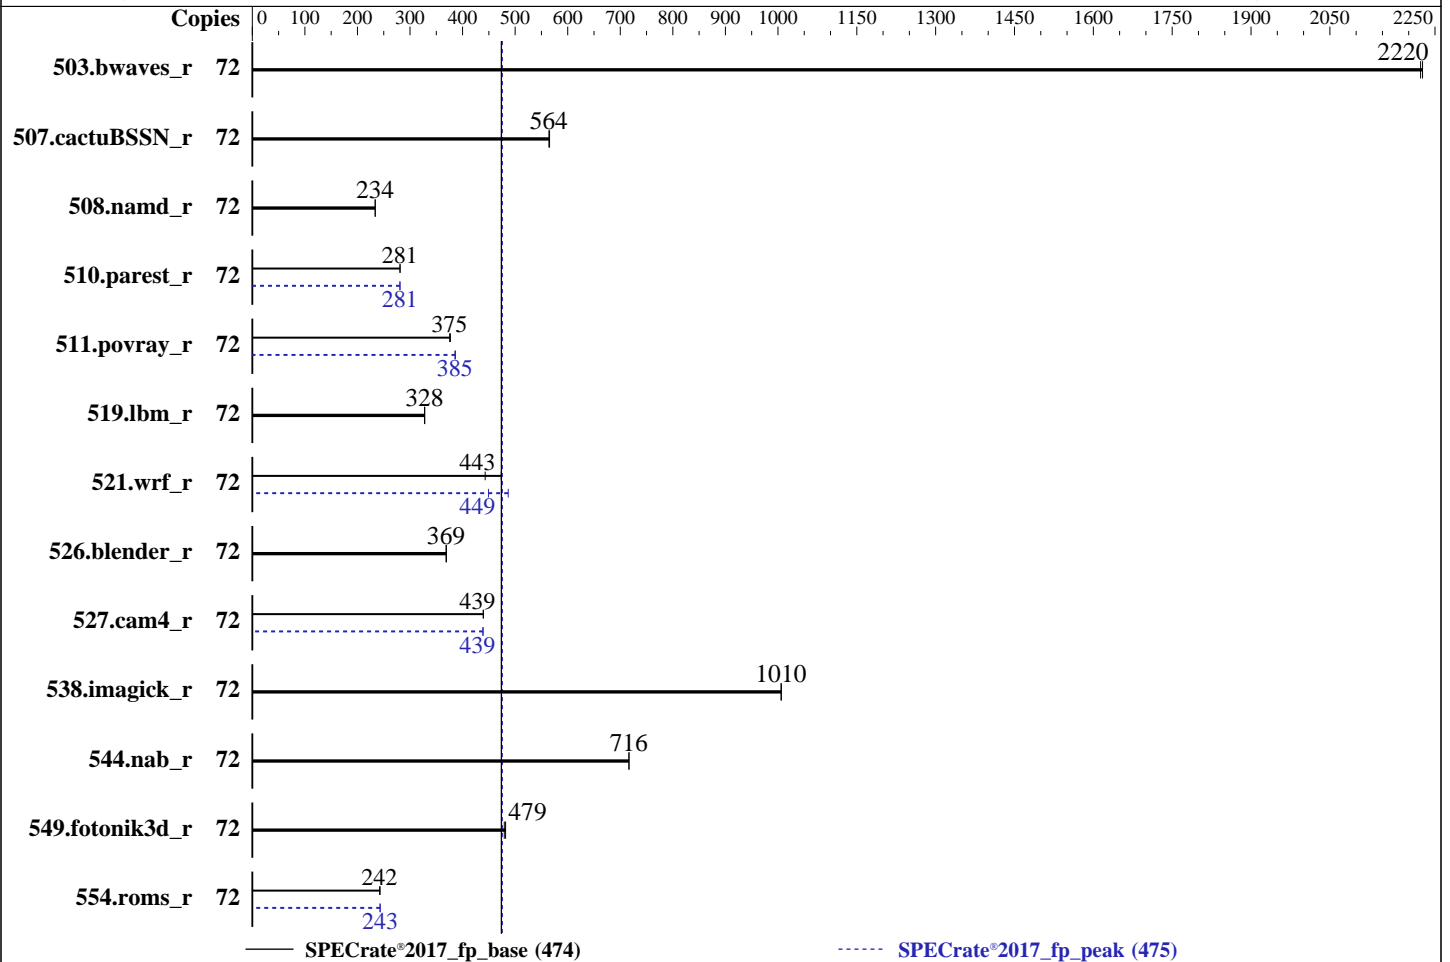

Hardware

CPU Name: Intel Xeon Gold 6416H
 Max MHz: 4200
 Nominal: 2200
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 2.00.55 Released Mar-2023
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	<u>325</u>	<u>2220</u>	324	2230			72	<u>325</u>	<u>2220</u>	324	2230		
507.cactuBSSN_r	72	161	565	<u>162</u>	<u>564</u>			72	161	565	<u>162</u>	<u>564</u>		
508.namd_r	72	292	234	<u>293</u>	<u>234</u>			72	292	234	<u>293</u>	<u>234</u>		
510.parest_r	72	<u>671</u>	<u>281</u>	670	281			72	<u>671</u>	<u>281</u>	670	281		
511.povray_r	72	446	377	<u>448</u>	<u>375</u>			72	<u>436</u>	<u>385</u>	435	387		
519.lbm_r	72	231	328	<u>232</u>	<u>328</u>			72	231	328	<u>232</u>	<u>328</u>		
521.wrf_r	72	341	474	<u>364</u>	<u>443</u>			72	<u>359</u>	<u>449</u>	331	487		
526.blender_r	72	297	369	<u>298</u>	<u>369</u>			72	297	369	<u>298</u>	<u>369</u>		
527.cam4_r	72	<u>287</u>	<u>439</u>	286	440			72	<u>287</u>	<u>439</u>	287	439		
538.imagick_r	72	<u>178</u>	<u>1010</u>	178	1010			72	<u>178</u>	<u>1010</u>	178	1010		
544.nab_r	72	<u>169</u>	<u>716</u>	169	717			72	<u>169</u>	<u>716</u>	169	717		
549.fotonik3d_r	72	<u>585</u>	<u>479</u>	582	482			72	<u>585</u>	<u>479</u>	582	482		
554.roms_r	72	471	243	<u>472</u>	<u>242</u>			72	<u>471</u>	<u>243</u>	470	243		

SPECrate®2017_fp_base = 474

SPECrate®2017_fp_peak = 475

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Jul 4 10:28:12 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. w
10:28:12 up 22:28, 2 users, load average: 46.93, 65.58, 69.10
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 Mon16 2:47m 0.08s 0.08s -bash
root tty2 07:32 2:54m 1.29s 0.08s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
3. Username
   From environment variable $USER:  root

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size               (kbytes, -d) unlimited
   scheduling priority         (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals            (-i) 2060149
   max locked memory          (kbytes, -l) 64
   max memory size            (kbytes, -m) unlimited
   open files                  (-n) 1024
   pipe size                   (512 bytes, -p) 8
   POSIX message queues       (bytes, -q) 819200
   real-time priority         (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                    (seconds, -t) unlimited
   max user processes         (-u) 2060149
   virtual memory             (kbytes, -v) unlimited
   file locks                  (-x) unlimited

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
   login -- root
   -bash
   -bash
   runcpu --define default-platform-flags --copies 72 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
   smt-on --define cores=36 --define physicalfirst --define invoke_with_interleave --define drop_caches
   --tune base,peak --iterations 2 -o all fprate
   runcpu --define default-platform-flags --copies 72 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=36 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --iterations 2 --output_format all
   --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.065/templogs/preenv.fprate.065.0.log --lognum 065.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /spec2017-icc2023.0

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6416H
   vendor_id      : GenuineIntel
   cpu family      : 6
   model          : 143
   stepping       : 7
   microcode      : 0x2b000111
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores      : 18
   siblings       : 36
   2 physical ids (chips)
   72 processors (hardware threads)
   physical id 0: core ids 0-17
   physical id 1: core ids 0-17
   physical id 0: apicids 0-35
   physical id 1: apicids 128-163
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                72
On-line CPU(s) list:   0-71
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6416H
BIOS Model name:       Intel(R) Xeon(R) Gold 6416H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):             2
Stepping:              7
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.7 MiB (36 instances)
L1i cache:             1.1 MiB (36 instances)
L2 cache:              72 MiB (36 instances)
L3 cache:              90 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-8,36-44
NUMA node1 CPU(s):    9-17,45-53
NUMA node2 CPU(s):    18-26,54-62
NUMA node3 CPU(s):    27-35,63-71
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.7M	12	Data	1	64	1	64
L1i	32K	1.1M	8	Instruction	1	64	1	64
L2	2M	72M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-8,36-44
node 0 size: 128045 MB
node 0 free: 121384 MB
node 1 cpus: 9-17,45-53
node 1 size: 129020 MB
node 1 free: 124385 MB
node 2 cpus: 18-26,54-62
node 2 size: 129020 MB
node 2 free: 124657 MB
node 3 cpus: 27-35,63-71
node 3 size: 129009 MB
node 3 free: 124550 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527457152 kB

10. who -r

run-level 5 Jul 3 12:00

11. Systemd service manager version: systemd 250 (250-6.e19_0)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmeefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

disabled      arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
               dbus-daemon debug-shell dnsmasq firewallld iprdump iprinit iprupdate iscsid iscsiui kpatch
               kvm_stat ledmon man-db-restart-cache-update nftables nvme-autoconnect podman
               podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
               rpmdm-rebuild serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
               systemd-pstore systemd-sysextr wpa_supplicant
indirect      spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=cc4bab05-907e-44ef-b818-2b2874390234
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=5ba347ca-8beb-4f6e-9c11-de63dc4ddf5f
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information
SPEC is set to: /spec2017-icc2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 420G 90G 330G 22% /

21. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 1288H V7
Product Family: Eagle Stream
Serial: serial

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 2.00.55
BIOS Date: 03/07/2023
BIOS Revision: 0.55

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 474

FusionServer 1288H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_fp_peak = 475

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-04 10:28:11-0400.

Report generated on 2023-08-02 16:27:33 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.