



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu


PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

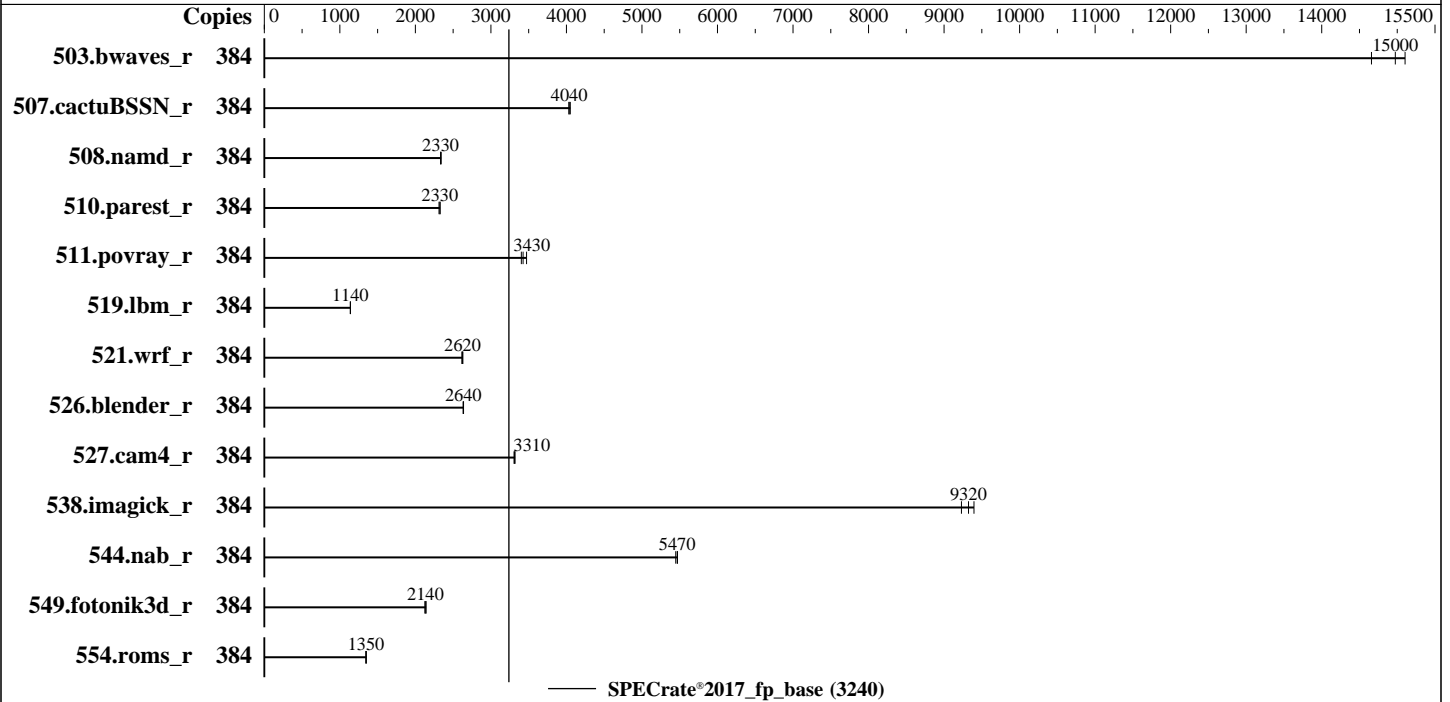

Hardware

CPU Name: Intel Xeon Platinum 8468H
Max MHz: 3800
Nominal: 2100
Enabled: 384 cores, 8 chips
Orderable: 8 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x SATA SSD, 3.84TB
Other: 1 x Fujitsu PRAID EP740i Raid Card

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.2.0 for D4029-C1x. Released Jun-2023 tested as V1.0.0.0 R0.11.0 for D4029-C1x Feb-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	255	15100	<u>257</u>	<u>15000</u>	263	14700							
507.cactuBSSN_r	384	<u>120</u>	<u>4040</u>	121	4030	120	4050							
508.namd_r	384	156	2330	<u>156</u>	<u>2330</u>	156	2340							
510.parest_r	384	<u>432</u>	<u>2330</u>	432	2330	434	2310							
511.povray_r	384	263	3400	258	3470	<u>262</u>	<u>3430</u>							
519.lbm_r	384	<u>355</u>	<u>1140</u>	355	1140	355	1140							
521.wrf_r	384	<u>328</u>	<u>2620</u>	327	2630	329	2620							
526.blender_r	384	<u>222</u>	<u>2640</u>	222	2640	222	2630							
527.cam4_r	384	202	3320	203	3310	<u>203</u>	<u>3310</u>							
538.imagick_r	384	103	9230	<u>102</u>	<u>9320</u>	102	9400							
544.nab_r	384	<u>118</u>	<u>5470</u>	118	5470	119	5450							
549.fotonik3d_r	384	704	2130	<u>701</u>	<u>2140</u>	699	2140							
554.roms_r	384	452	1350	454	1340	<u>453</u>	<u>1350</u>							

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper-Threading = Disabled
SNC (Sub NUMA) = Enable SNC4

Sysinfo program /home/benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon May 15 18:30:41 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
18:30:41 up 4 min, 2 users, load average: 0.68, 3.27, 1.84
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 18:27 3:10 0.05s 0.05s -bash
root pts/0 192.168.1.114 18:27 9.00s 2.79s 0.26s

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
/home/benchmark/ptu_v4.0/UNIFIED_SERVER_PTAT_V4.0.0_20230110/ptat -mon -i 5000000 -filter 0x3f -y -ts -csv -log
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 16510388
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 16510388
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 48
8 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

physical id 3: core ids 0-47
physical id 4: core ids 0-47
physical id 5: core ids 0-47
physical id 6: core ids 0-47
physical id 7: core ids 0-47
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72,
74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94
physical id 1: apicids
128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222
physical id 2: apicids
256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350
physical id 3: apicids
384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478
physical id 4: apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606
physical id 5: apicids
640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734
physical id 6: apicids
768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862
physical id 7: apicids
896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 8
Stepping: 6
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_l1d arch_capabilities

Virtualization:

L1d cache: 18 MiB (384 instances)
L1i cache: 12 MiB (384 instances)
L2 cache: 768 MiB (384 instances)
L3 cache: 840 MiB (8 instances)

NUMA node(s): 32
NUMA node0 CPU(s): 0-11
NUMA node1 CPU(s): 12-23
NUMA node2 CPU(s): 24-35
NUMA node3 CPU(s): 36-47
NUMA node4 CPU(s): 48-59
NUMA node5 CPU(s): 60-71
NUMA node6 CPU(s): 72-83
NUMA node7 CPU(s): 84-95
NUMA node8 CPU(s): 96-107
NUMA node9 CPU(s): 108-119
NUMA node10 CPU(s): 120-131
NUMA node11 CPU(s): 132-143
NUMA node12 CPU(s): 144-155
NUMA node13 CPU(s): 156-167
NUMA node14 CPU(s): 168-179
NUMA node15 CPU(s): 180-191
NUMA node16 CPU(s): 192-203
NUMA node17 CPU(s): 204-215
NUMA node18 CPU(s): 216-227
NUMA node19 CPU(s): 228-239
NUMA node20 CPU(s): 240-251
NUMA node21 CPU(s): 252-263
NUMA node22 CPU(s): 264-275
NUMA node23 CPU(s): 276-287
NUMA node24 CPU(s): 288-299
NUMA node25 CPU(s): 300-311
NUMA node26 CPU(s): 312-323
NUMA node27 CPU(s): 324-335
NUMA node28 CPU(s): 336-347
NUMA node29 CPU(s): 348-359
NUMA node30 CPU(s): 360-371
NUMA node31 CPU(s): 372-383

Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	2M	768M	16	Unified	2	2048	1	64
L3	105M	840M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

```

node 0 cpus: 0-11
node 0 size: 128469 MB
node 0 free: 127029 MB
node 1 cpus: 12-23
node 1 size: 129020 MB
node 1 free: 128524 MB
node 2 cpus: 24-35
node 2 size: 129020 MB
node 2 free: 128544 MB
node 3 cpus: 36-47
node 3 size: 129020 MB
node 3 free: 128506 MB
node 4 cpus: 48-59
node 4 size: 129020 MB
node 4 free: 128586 MB
node 5 cpus: 60-71
node 5 size: 129020 MB
node 5 free: 128596 MB
node 6 cpus: 72-83
node 6 size: 129020 MB
node 6 free: 128501 MB
node 7 cpus: 84-95
node 7 size: 129020 MB
node 7 free: 128558 MB
node 8 cpus: 96-107
node 8 size: 129020 MB
node 8 free: 128811 MB
node 9 cpus: 108-119
node 9 size: 129020 MB
node 9 free: 128818 MB
node 10 cpus: 120-131
node 10 size: 129020 MB
node 10 free: 128802 MB
node 11 cpus: 132-143
node 11 size: 129020 MB
node 11 free: 128828 MB
node 12 cpus: 144-155
node 12 size: 129020 MB
node 12 free: 128757 MB
node 13 cpus: 156-167
node 13 size: 129020 MB
node 13 free: 128771 MB
node 14 cpus: 168-179
node 14 size: 129020 MB
node 14 free: 128731 MB
node 15 cpus: 180-191
node 15 size: 129020 MB
node 15 free: 128769 MB
node 16 cpus: 192-203
node 16 size: 129020 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 16 free: 128752 MB
node 17 cpus: 204-215
node 17 size: 129020 MB
node 17 free: 128733 MB
node 18 cpus: 216-227
node 18 size: 129020 MB
node 18 free: 128760 MB
node 19 cpus: 228-239
node 19 size: 129020 MB
node 19 free: 128754 MB
node 20 cpus: 240-251
node 20 size: 129020 MB
node 20 free: 128736 MB
node 21 cpus: 252-263
node 21 size: 129020 MB
node 21 free: 128759 MB
node 22 cpus: 264-275
node 22 size: 129020 MB
node 22 free: 128813 MB
node 23 cpus: 276-287
node 23 size: 129020 MB
node 23 free: 128768 MB
node 24 cpus: 288-299
node 24 size: 129020 MB
node 24 free: 128795 MB
node 25 cpus: 300-311
node 25 size: 129020 MB
node 25 free: 128835 MB
node 26 cpus: 312-323
node 26 size: 129020 MB
node 26 free: 128799 MB
node 27 cpus: 324-335
node 27 size: 129020 MB
node 27 free: 128805 MB
node 28 cpus: 336-347
node 28 size: 129020 MB
node 28 free: 128652 MB
node 29 cpus: 348-359
node 29 size: 128986 MB
node 29 free: 128738 MB
node 30 cpus: 360-371
node 30 size: 129020 MB
node 30 free: 128780 MB
node 31 cpus: 372-383
node 31 size: 128562 MB
node 31 free: 128331 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 12 12 12 12 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
1: 12 10 12 12 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31
2: 12 12 10 12 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31
3: 12 12 12 10 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31
4: 21 21 21 21 21 10 12 12 12 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21
5: 21 21 21 21 12 10 12 12 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 31

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

31 31 31 21 21 21 21
6: 21 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
7: 21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
8: 21 21 21 21 31 31 31 31 31 10 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
9: 21 21 21 21 31 31 31 31 31 12 10 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
10: 21 21 21 21 31 31 31 31 31 12 12 10 12 21 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
11: 21 21 21 21 31 31 31 31 12 12 12 10 21 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
12: 31 31 31 31 31 21 21 21 21 21 21 10 12 12 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
13: 31 31 31 31 21 21 21 21 21 21 21 12 10 12 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
14: 31 31 31 31 21 21 21 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
15: 31 31 31 31 21 21 21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
16: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 10 12 12 12 21 21 21 21 21
21 21 21 31 31 31 31
17: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 10 12 12 21 21 21 21 21
21 21 21 31 31 31 31
18: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 12 10 12 21 21 21 21 21
21 21 21 31 31 31 31
19: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 12 12 10 21 21 21 21 21
21 21 21 31 31 31 31
20: 21 21 21 21 31 31 31 31 31 31 21 21 21 21 21 21 21 21 10 12 12 12 31
31 31 31 21 21 21 21
21: 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 12 10 12 12 31
31 31 31 21 21 21 21
22: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 12 12 10 12 31
31 31 31 21 21 21 21
23: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 12 12 12 10 31
31 31 31 21 21 21 21
24: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 10
12 12 12 21 21 21 21
25: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
10 12 12 21 21 21 21
26: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
12 10 12 21 21 21 21
27: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
12 12 10 21 21 21 21
28: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 10 12 12 12
29: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 10 12 12
30: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 12 10 12
31: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      4226684976 kB
-----

```

```

10. who -r

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

run-level 3 May 15 18:27

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time
* smartd.service loaded failed failed Self Monitoring and Reporting Technology (SMART) Daemon
```

13. Services, from systemctl list-unit-files

```
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
            haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
            nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4
            wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled   accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
            bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
            cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
            haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load
            lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind
            rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
            speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
            systemd-time-wait-sync systemd-timesyncd udisks2 upower
indirect   wickedd
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=c13187e0-8b8c-4db9-ba32-defae6e6232c
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=375M,high
crashkernel=72M,low
```

15. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

16. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   3.5T  46G  3.5T   2% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         FUJITSU
Product:        n/a
Product Family: SERVER
Serial:         n/a

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
31x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
26x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.11.0 for D4029-Clx
BIOS Date: 02/28/2023
BIOS Revision: 0.11
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H,
2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8468H, 2.10GHz

SPECrate®2017_fp_base = 3240

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-15 05:30:40-0400.
Report generated on 2023-08-16 14:13:30 by CPU2017 PDF formatter v6716.
Originally published on 2023-08-15.