



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

### SPECrate®2017\_fp\_base = 650

## NF5180M7 (Intel Xeon Gold 6442Y)

### SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358


Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

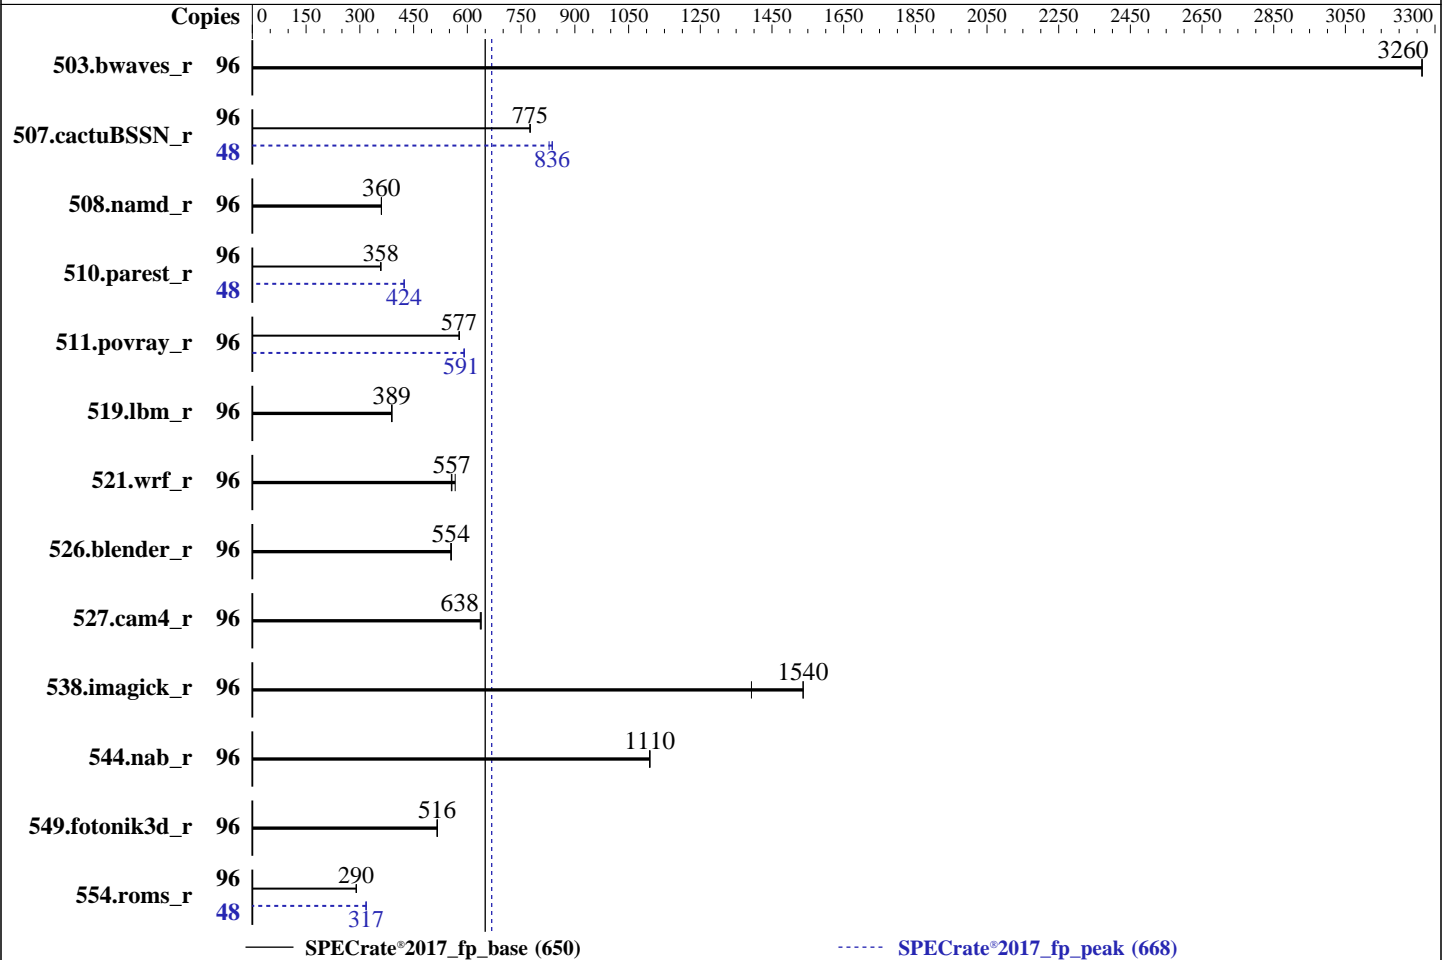

### Hardware

CPU Name: Intel Xeon Gold 6442Y  
 Max MHz: 4000  
 Nominal: 2600  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.22.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 03.01.00 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

## NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<u>295</u>	<u>3260</u>	295	3260	295	3260	96	<u>295</u>	<u>3260</u>	295	3260	295	3260
507.cactuBSSN_r	96	157	775	<u>157</u>	<u>775</u>	157	775	48	73.4	828	<u>72.7</u>	<u>836</u>	72.6	837
508.namd_r	96	253	360	253	360	<u>253</u>	<u>360</u>	96	253	360	253	360	<u>253</u>	<u>360</u>
510.parest_r	96	702	358	699	359	<u>701</u>	<u>358</u>	48	<u>296</u>	<u>424</u>	296	424	296	424
511.povray_r	96	389	577	388	578	<u>388</u>	<u>577</u>	96	379	591	<u>379</u>	<u>591</u>	379	592
519.lbm_r	96	260	390	260	389	<u>260</u>	<u>389</u>	96	260	390	260	389	<u>260</u>	<u>389</u>
521.wrf_r	96	<u>386</u>	<u>557</u>	380	566	387	555	96	<u>386</u>	<u>557</u>	380	566	387	555
526.blender_r	96	263	555	<u>264</u>	<u>554</u>	264	554	96	263	555	<u>264</u>	<u>554</u>	264	554
527.cam4_r	96	263	638	<u>263</u>	<u>638</u>	264	636	96	263	638	<u>263</u>	<u>638</u>	264	636
538.imagick_r	96	155	1540	<u>155</u>	<u>1540</u>	171	1390	96	155	1540	<u>155</u>	<u>1540</u>	171	1390
544.nab_r	96	146	1110	146	1110	<u>146</u>	<u>1110</u>	96	146	1110	146	1110	<u>146</u>	<u>1110</u>
549.fotonik3d_r	96	<u>725</u>	<u>516</u>	724	517	726	515	96	<u>725</u>	<u>516</u>	724	517	726	515
554.roms_r	96	<u>526</u>	<u>290</u>	526	290	525	290	48	240	318	240	317	<u>240</u>	<u>317</u>

SPECrate®2017\_fp\_base = 650

SPECrate®2017\_fp\_peak = 668

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Oct 23 18:37:01 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.0-70.22.1.el9\_0.x86\_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86\_64 x86\_64 x86\_64  
GNU/Linux  
-----

2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

18:37:01 up 5:24, 1 user, load average: 69.87, 89.60, 93.05
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1     13:18   5:18m  0.78s  0.00s sh
reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh

```

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2062224
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 2062224
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/tempslogs/preenv.fprate.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6442Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode     : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

physical id 1: core ids 0-23  
physical id 0: apicids 0-47  
physical id 1: apicids 128-175

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6442Y
BIOS Model name:      Intel(R) Xeon(R) Gold 6442Y
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
Stepping:              8
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              5200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                      cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                      arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128550 MB
node 0 free: 115744 MB
node 1 cpus: 12-23,60-71
node 1 size: 129018 MB
node 1 free: 118502 MB
node 2 cpus: 24-35,72-83
node 2 size: 129018 MB
node 2 free: 118688 MB
node 3 cpus: 36-47,84-95
node 3 size: 129007 MB
node 3 free: 118658 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527970360 kB

10. who -r

run-level 3 Oct 23 13:12

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	dbus-broker getty@ tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdm-rebuild rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

### 19. OS release

```

From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

### 20. Disk information

```

SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  214G  605G  27% /home

```

### 21. /sys/devices/virtual/dmi/id

```

Vendor:      IEI
Product:     NF5180M7
Product Family: Not specified
Serial:      000000000

```

### 22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

```

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.01.00
BIOS Date:        12/29/2022

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 650

NF5180M7 (Intel Xeon Gold 6442Y)

SPECrate®2017\_fp\_peak = 668

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-23 18:37:00-0400.

Report generated on 2023-11-21 20:31:36 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.