



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen11


(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

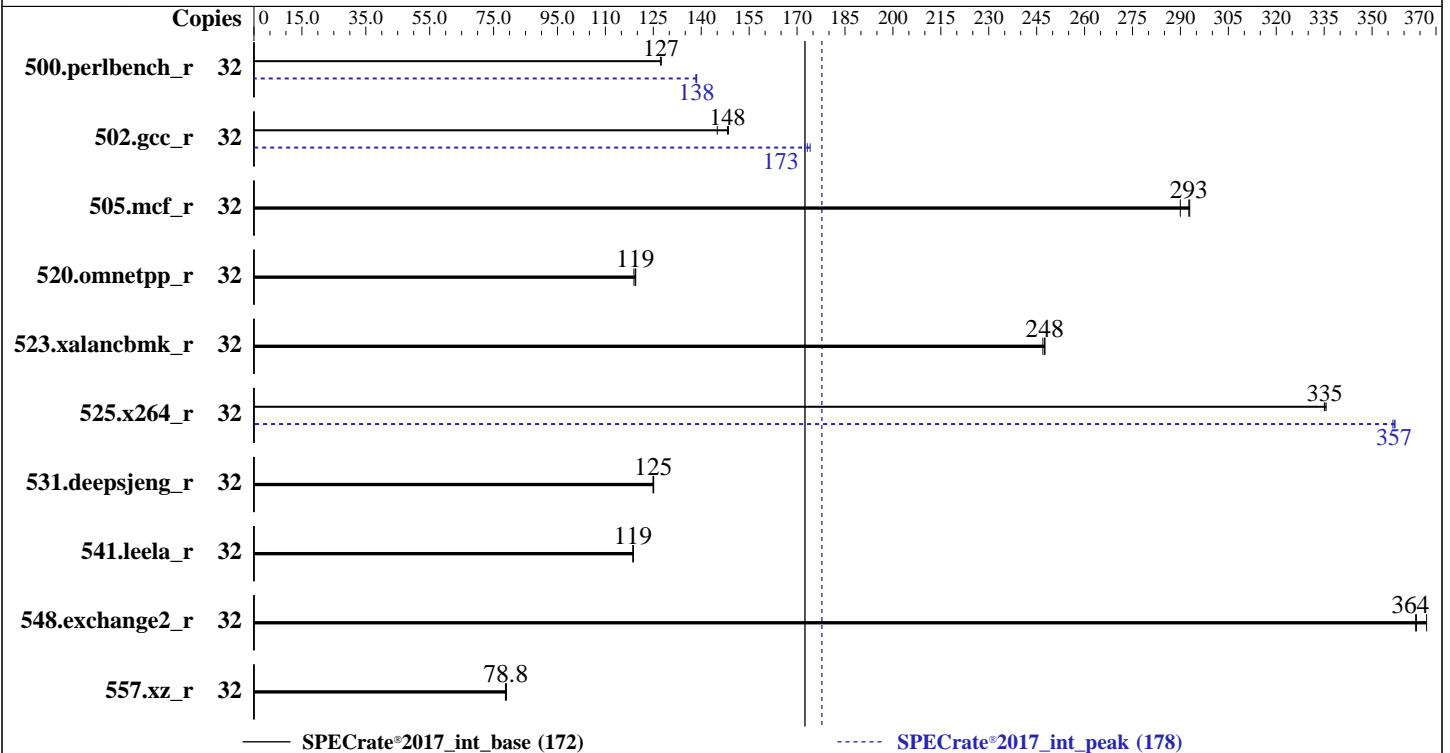

### Hardware

CPU Name: Intel Xeon Silver 4509Y  
 Max MHz: 4100  
 Nominal: 2600  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4400)  
 Storage: 1 x 3.2 TB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	400	127	<b>400</b>	<b>127</b>	400	127	32	368	139	368	138	<b>368</b>	<b>138</b>
502.gcc_r	32	312	145	<b>306</b>	<b>148</b>	305	149	32	260	174	263	172	<b>262</b>	<b>173</b>
505.mcf_r	32	178	290	177	293	<b>177</b>	<b>293</b>	32	178	290	177	293	<b>177</b>	<b>293</b>
520.omnetpp_r	32	351	119	<b>352</b>	<b>119</b>	353	119	32	351	119	<b>352</b>	<b>119</b>	353	119
523.xalancbmk_r	32	<b>137</b>	<b>248</b>	136	248	137	247	32	<b>137</b>	<b>248</b>	136	248	137	247
525.x264_r	32	167	335	167	336	<b>167</b>	<b>335</b>	32	157	357	157	356	<b>157</b>	<b>357</b>
531.deepsjeng_r	32	294	125	<b>293</b>	<b>125</b>	293	125	32	294	125	<b>293</b>	<b>125</b>	293	125
541.leela_r	32	446	119	447	119	<b>447</b>	<b>119</b>	32	446	119	447	119	<b>447</b>	<b>119</b>
548.exchange2_r	32	231	364	<b>230</b>	<b>364</b>	228	367	32	231	364	<b>230</b>	<b>364</b>	228	367
557.xz_r	32	<b>438</b>	<b>78.8</b>	437	79.0	439	78.7	32	<b>438</b>	<b>78.8</b>	437	79.0	439	78.7

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
tuned service was set to Throughput-Performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen11**

(2.60 GHz, Intel Xeon Silver 4509Y)

**SPECrate®2017\_int\_base = 172**

**SPECrate®2017\_int\_peak = 178**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

### BIOS Configuration

Workload Profile set to General Throughput Compute  
Memory Patrol Scrubbing set to Disabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Intel UPI Link Enablement set to Single Link  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom  
DCU Stream Prefetcher set to Disabled  
Adjacent Sector Prefetch set to Disabled  
Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Mar 7 20:21:33 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
  - 2. w
  - 3. Username
  - 4. ulimit -a
  - 5. sysinfo process ancestry
  - 6. /proc/cpuinfo
  - 7. lscpu
  - 8. numactl --hardware
  - 9. /proc/meminfo
  - 10. who -r
  - 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  - 12. Services, from systemctl list-unit-files
  - 13. Linux kernel boot-time arguments, from /proc/cmdline
  - 14. cpupower frequency-info
  - 15. tuned-adm active
  - 16. sysctl
  - 17. /sys/kernel/mm/transparent\_hugepage
  - 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  - 19. OS release
  - 20. Disk information
  - 21. /sys/devices/virtual/dmi/id
  - 22. dmidecode
  - 23. BIOS
- 
- 1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen11**

(2.60 GHz, Intel Xeon Silver 4509Y)

**SPECrate®2017\_int\_base = 172**

**SPECrate®2017\_int\_peak = 178**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

2. w  
20:21:33 up 0 min, 0 users, load average: 0.12, 0.03, 0.01  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062843  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062843  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@notty  
bash -c cd \$SPEC/ && \$SPEC/intrateTP.sh  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak --output\_format all --nopower  
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) SILVER 4509Y  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000571  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrs\_pbrsb  
cpu cores : 8  
siblings : 16  
2 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 1: core ids 0-7

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

physical id 0: apicids 0-15  
physical id 1: apicids 64-79

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      32
On-line CPU(s) list:        0-31
Vendor ID:                   GenuineIntel
Model name:                  INTEL(R) XEON(R) SILVER 4509Y
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         8
Socket(s):                   2
Stepping:                    8
BogoMIPS:                    5200.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   768 KiB (16 instances)
L1i cache:                   512 KiB (16 instances)
L2 cache:                    32 MiB (16 instances)
L3 cache:                    45 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-3,16-19
NUMA node1 CPU(s):          4-7,20-23
NUMA node2 CPU(s):          8-11,24-27
NUMA node3 CPU(s):          12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen11**

(2.60 GHz, Intel Xeon Silver 4509Y)

**SPECrate®2017\_int\_base = 172**

**SPECrate®2017\_int\_peak = 178**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. `numactl --hardware`

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 128714 MB
node 0 free: 128013 MB
node 1 cpus: 4-7,20-23
node 1 size: 129021 MB
node 1 free: 128647 MB
node 2 cpus: 8-11,24-27
node 2 size: 129021 MB
node 2 free: 128251 MB
node 3 cpus: 12-15,28-31
node 3 size: 128975 MB
node 3 free: 128624 MB
node distances:
node  0  1  2  3
  0:  10  20  30  30
  1:  20  10  30  30
  2:  30  30  10  20
  3:  30  30  20  10

```

9. `/proc/meminfo`

MemTotal: 528111664 kB

10. `who -r`

run-level 3 Mar 7 20:21

11. Systemd service manager version: `systemd 249 (249.16+suse.171.gdad0071f15)`

```

Default Target Status
multi-user      running

```

12. Services, from `systemctl list-unit-files`

```

STATE          UNIT FILES
enabled        apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
                postfix purge-kernels rollback sshd systemd-pstore wickd wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                haveged haveged-switch-root issue-add-ssh-keys kexec-load nvme-f-autoconnect rpmconfigcheck
                serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd tuned
indirect       wickedd

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen11**

(2.60 GHz, Intel Xeon Silver 4509Y)

**SPECrate®2017\_int\_base = 172**

**SPECrate®2017\_int\_peak = 178**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=a806a23c-58ee-4027-a60d-04b4da1323d6
splash=silent
resume=/dev/disk/by-uuid/ebbabfc7-d0cb-4aac-aeed-3d2c035d5d16
mitigations=auto
quiet
security=apparmor

```

```

14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

15. tuned-adm active
  Current active profile: throughput-performance

```

```

16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen11**

(2.60 GHz, Intel Xeon Silver 4509Y)

**SPECrate®2017\_int\_base = 172**

**SPECrate®2017\_int\_peak = 178**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 2.5T 124G 2.3T 6% /home  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant DL380 Gen11  
Product Family: ProLiant  
Serial: CNX21000G3  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 4400  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 2.12  
BIOS Date: 12/13/2023  
BIOS Revision: 2.12  
Firmware Revision: 1.52  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.60 GHz, Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 178

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-07 09:51:32-0500.

Report generated on 2024-04-09 15:43:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.