



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

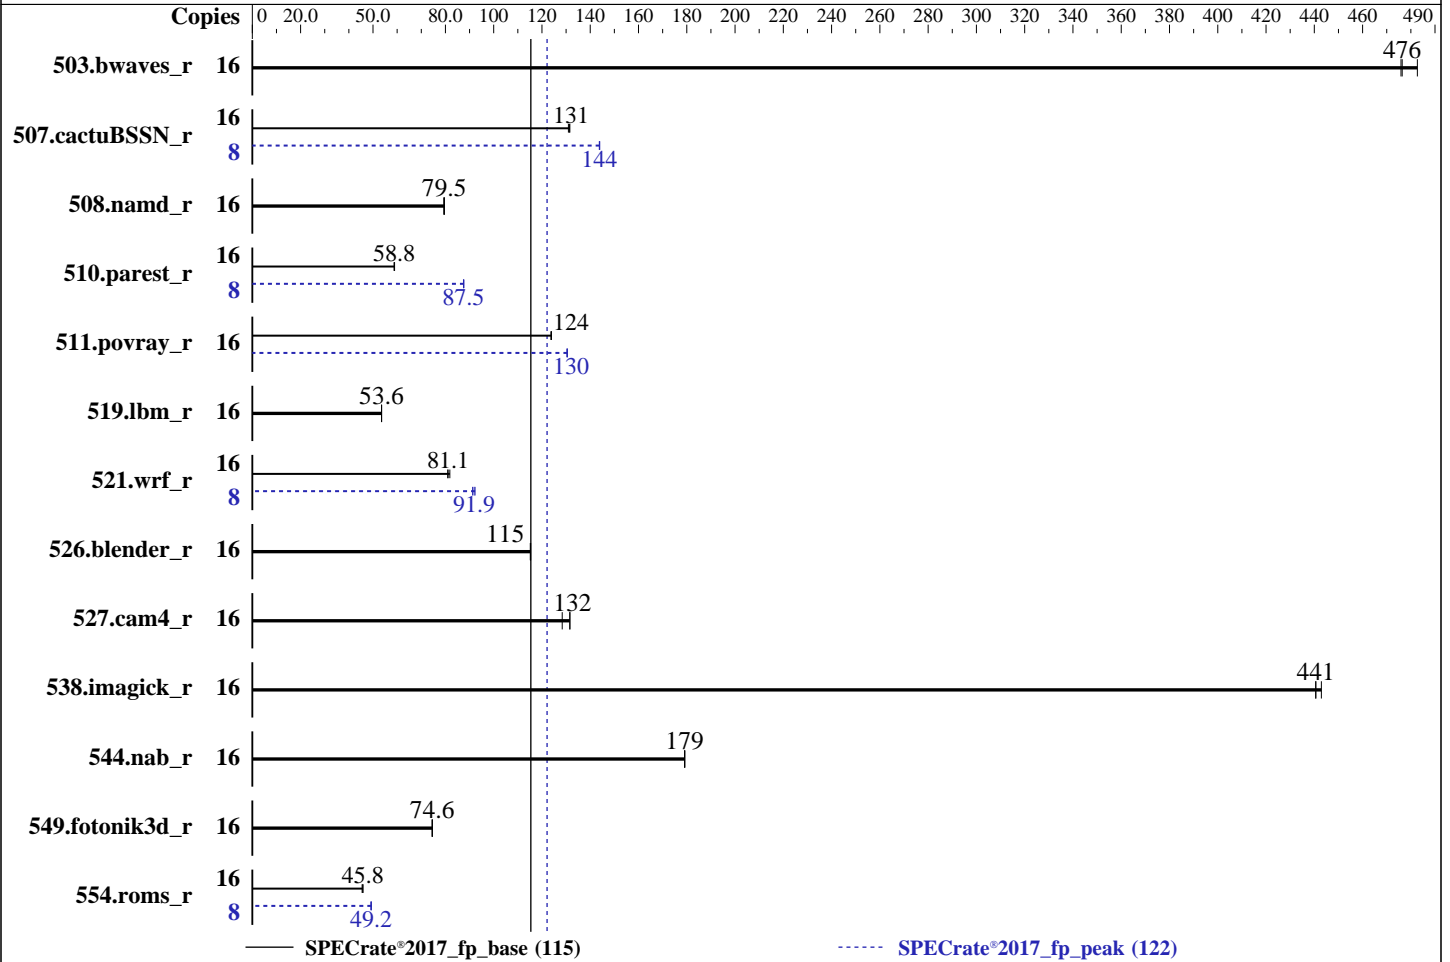

Hardware

CPU Name: Intel Xeon E-2478
 Max MHz: 5200
 Nominal: 2800
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 24 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
 Storage: 1 x 1 TB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5 (x86_64)
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 0502 released Dec-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	332	483	<u>337</u>	<u>476</u>	337	476	16	332	483	<u>337</u>	<u>476</u>	337	476
507.cactuBSSN_r	16	154	132	<u>154</u>	<u>131</u>	155	131	8	<u>70.4</u>	<u>144</u>	70.4	144	70.4	144
508.namd_r	16	192	79.3	<u>191</u>	<u>79.5</u>	191	79.6	16	192	79.3	<u>191</u>	<u>79.5</u>	191	79.6
510.parest_r	16	710	58.9	<u>712</u>	<u>58.8</u>	712	58.8	8	<u>239</u>	<u>87.5</u>	239	87.5	239	87.7
511.povray_r	16	<u>302</u>	<u>124</u>	301	124	302	124	16	286	131	287	130	<u>286</u>	<u>130</u>
519.lbm_r	16	<u>315</u>	<u>53.6</u>	315	53.6	315	53.5	16	<u>315</u>	<u>53.6</u>	315	53.6	315	53.5
521.wrf_r	16	443	81.0	438	81.8	<u>442</u>	<u>81.1</u>	8	196	91.3	194	92.3	<u>195</u>	<u>91.9</u>
526.blender_r	16	211	115	<u>211</u>	<u>115</u>	212	115	16	211	115	<u>211</u>	<u>115</u>	212	115
527.cam4_r	16	<u>213</u>	<u>132</u>	218	128	213	132	16	<u>213</u>	<u>132</u>	218	128	213	132
538.imagick_r	16	<u>90.3</u>	<u>441</u>	89.8	443	90.3	441	16	<u>90.3</u>	<u>441</u>	89.8	443	90.3	441
544.nab_r	16	150	179	<u>150</u>	<u>179</u>	150	179	16	150	179	<u>150</u>	<u>179</u>	150	179
549.fotonik3d_r	16	836	74.6	837	74.5	<u>836</u>	<u>74.6</u>	16	836	74.6	837	74.5	<u>836</u>	<u>74.6</u>
554.roms_r	16	555	45.8	<u>556</u>	<u>45.8</u>	559	45.5	8	258	49.3	258	49.2	<u>258</u>	<u>49.2</u>

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic24u0/lib/intel64:/ic24u0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
VT-d = Disabled
Package C State Limit = C0/C1
AES = Disabled
Engine Boost = Level3(Max)
SR-IOV Support = Disabled
Energy Efficient Turbo = Enabled
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /ic24u0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Mar 15 02:52:11 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

02:52:11 up 16:55, 2 users, load average: 12.53, 15.14, 15.64

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	Thu09	15:25m	0.66s	0.00s	/bin/bash ./rate.sh
root	tty2	-	Thu09	9:13m	0.12s	0.12s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 256577
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 256577
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
ic2024.0.2-lin-xeon_e-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define
physicallogical --define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
ic2024.0.2-lin-xeon_e-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define
physicallogical --define no-numa --tune base,peak --output_format all --define drop_caches --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.038/tempslogs/preenv.fprate.038.0.log --lognum 038.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u0

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) E E-2478
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 8
siblings      : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: apicids 0-15

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 48 bits virtual
Byte Order:           Little Endian
CPU(s):               16
On-line CPU(s) list:  0-15
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) E E-2478
CPU family:           6
Model:                183
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):            1
Stepping:             1
CPU max MHz:          6700.0000
CPU min MHz:          800.0000
BogoMIPS:             5606.40
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                    ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                    tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                    clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                    avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
                    hwp_pkg_req hfi umip pku ospke waitpkg gfni vpcmlmulqdq tme rdpid movdiri
                    movdir64b fsrm md_clear serialize pconfig arch_lbr flush_l1d
                    arch_capabilities

Virtualization:       VT-x
L1d cache:           384 KiB (8 instances)
L1i cache:           256 KiB (8 instances)
L2 cache:            16 MiB (8 instances)
L3 cache:            24 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):   0-15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                    sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 64174 MB
node 0 free: 50512 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 65714420 kB

10. who -r

run-level 3 Mar 14 09:56

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=c7ea704b-969d-4a21-bb75-dacf025811fc
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 0:
current policy: frequency should be within 800 MHz and 6.40 GHz.
The governor "performance" may decide which speed to use
within this range.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes

```
-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
-----
```

```
-----
19. Disk information
SPEC is set to: /ic24u0
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda8   xfs   763G  34G  730G  5% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS300-E12-RS4
Product Family: Server
Serial:      865236000406
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x SK Hynix HMC88MEBEA081N 32 GB 2 rank 4800, configured at 4400
1x SK Hynix HMC88MEBEA084N 32 GB 2 rank 4800, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0502
BIOS Date: 12/28/2023
BIOS Revision: 5.2

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Base Portability Flags (Continued)

544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.80 GHz, Intel Xeon E-2478)

SPECrate®2017_fp_base = 115

SPECrate®2017_fp_peak = 122

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-14 14:52:11-0400.

Report generated on 2024-04-24 14:31:13 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.