



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

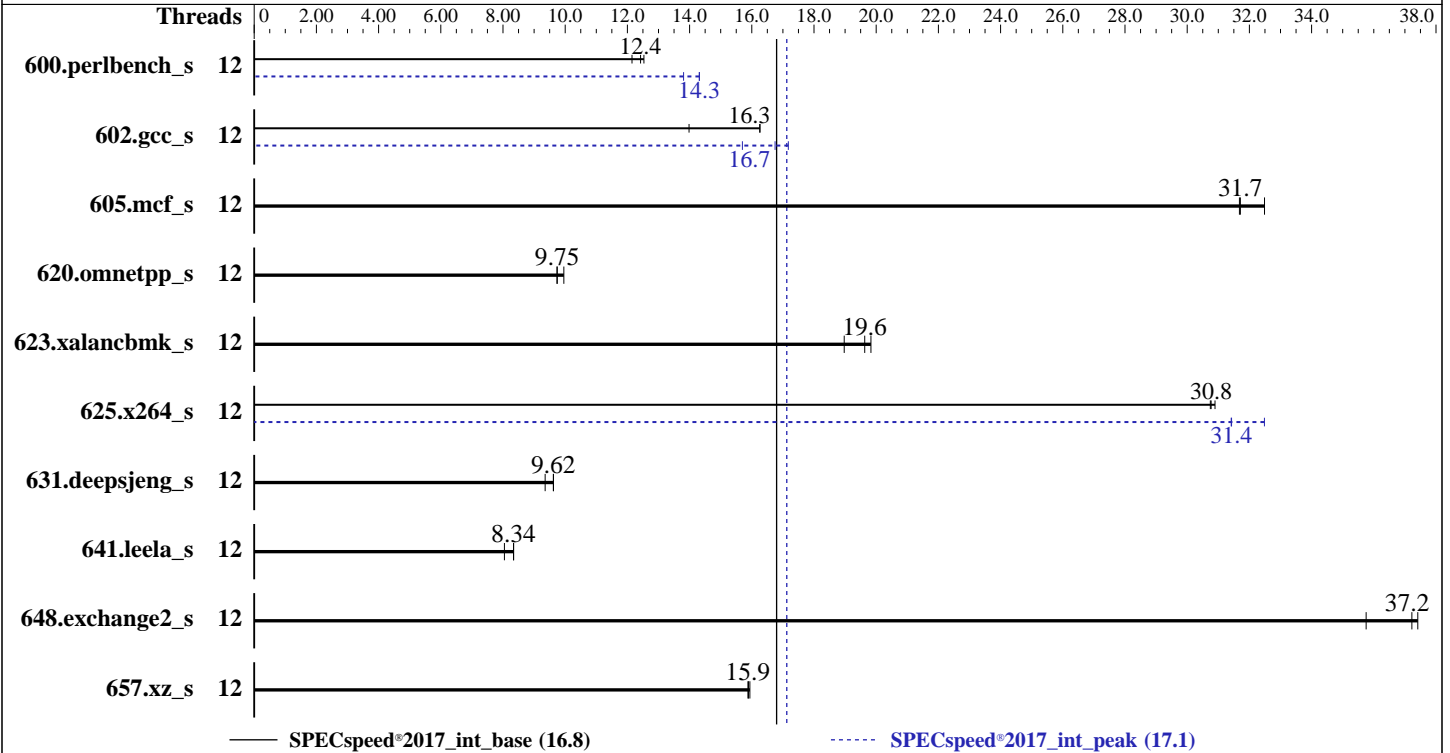

Hardware

CPU Name: Intel Xeon E-2486
 Max MHz: 5600
 Nominal: 3500
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 18 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version CTE105H 1.10 released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	146	12.1	142	12.5	143	12.4	12	124	14.3	124	14.3	129	13.8
602.gcc_s	12	245	16.3	285	14.0	245	16.3	12	232	17.2	254	15.7	238	16.7
605.mcf_s	12	145	32.5	149	31.7	149	31.7	12	145	32.5	149	31.7	149	31.7
620.omnetpp_s	12	164	9.96	168	9.74	167	9.75	12	164	9.96	168	9.74	167	9.75
623.xalancbmk_s	12	71.5	19.8	74.7	19.0	72.2	19.6	12	71.5	19.8	74.7	19.0	72.2	19.6
625.x264_s	12	57.1	30.9	57.4	30.7	57.3	30.8	12	54.3	32.5	56.1	31.4	56.2	31.4
631.deepsjeng_s	12	149	9.62	153	9.36	149	9.62	12	149	9.62	153	9.36	149	9.62
641.leela_s	12	205	8.34	212	8.05	205	8.34	12	205	8.34	212	8.05	205	8.34
648.exchange2_s	12	78.6	37.4	82.2	35.8	79.0	37.2	12	78.6	37.4	82.2	35.8	79.0	37.2
657.xz_s	12	389	15.9	388	15.9	389	15.9	12	389	15.9	388	15.9	389	15.9

SPECspeed®2017_int_base = **16.8**

SPECspeed®2017_int_peak = **17.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 16.8

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode

CPU P-state Control set to Legacy

Turbo Limit for 95W CPU set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon May 13 19:59:04 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
19:59:04 up 0 min, 1 user, load average: 0.00, 0.00, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 19:58 8.00s 0.72s 0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 256771
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 256771
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sierraforest-speed-20231213.cfg --define cores=12 --tune base,peak -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sierraforest-speed-20231213.cfg --define cores=12 --tune base,peak --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.177/temlogs/preenv.intspeed.177.0.log --lognum 177.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) E E-2486
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 6
siblings      : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     42 bits physical, 48 bits virtual
Byte Order:        Little Endian
CPU(s):            12
On-line CPU(s) list: 0-11
Vendor ID:         GenuineIntel
Model name:        Intel(R) Xeon(R) E E-2486

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 16.8

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017

Test Date: May-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```

CPU family:           6
Model:               183
Thread(s) per core:  2
Core(s) per socket:  6
Socket(s):           1
Stepping:            1
Frequency boost:     enabled
CPU max MHz:         3501.0000
CPU min MHz:         800.0000
BogoMIPS:            6988.80
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                    ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                    tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                    clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                    avx_vnni dtherm ida arat pln pts hfi umip pku ospke waitpkg gfni vaes
                    vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig
                    arch_lbr flush_l1d arch_capabilities

Virtualization:      VT-x
L1d cache:           288 KiB (6 instances)
L1i cache:           192 KiB (6 instances)
L2 cache:            12 MiB (6 instances)
L3 cache:            18 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):  0-11
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:  Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBSB-eIBRS SW
sequence
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 64222 MB
node 0 free: 63713 MB
node distances:
node 0
0: 10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

9. /proc/meminfo
MemTotal: 65764252 kB

10. who -r
run-level 3 May 13 19:58

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=178ca5f7-ae8d-49cb-88b7-ce796ad62ec9
splash=silent
quiet
security=apparmor
mitigations=auto

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.50 GHz.
The governor "ondemand" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   893G   30G  863G   4% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem ST50 V3
Product Family:  ThinkSystem
Serial:          1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  1x SK Hynix HMC88AE081N 32 GB 2 rank 4800, configured at 4400
  1x SK Hynix HMC88AE084N 32 GB 2 rank 4800, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

BIOS Version: CTE105H-1.10
BIOS Date: 03/28/2024
BIOS Revision: 1.10
Firmware Revision: 1.20

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

Base Portability Flags (Continued)

```
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 16.8

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST50 V3
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_int_base = 16.8

SPECspeed®2017_int_peak = 17.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-13 07:59:04-0400.

Report generated on 2024-06-24 10:43:10 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-18.