



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

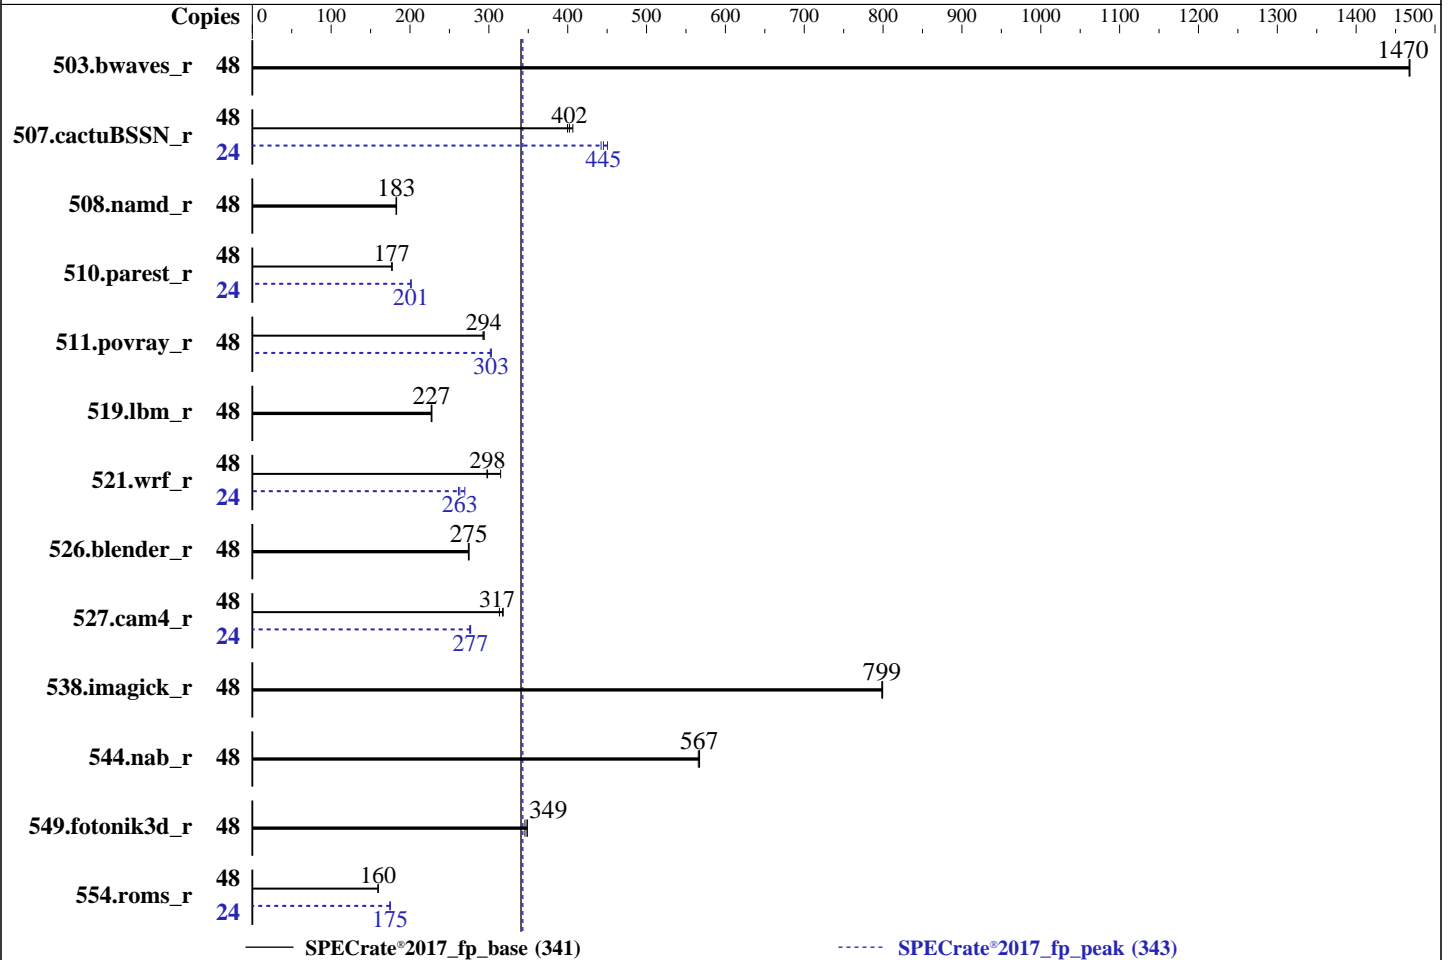

### Hardware

CPU Name: Intel Xeon Silver 4510  
 Max MHz: 4100  
 Nominal: 2400  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)  
 Storage: 1 x 960 GB NVMe  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 5.14.0-362.13.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.1a released Mar-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at cost of additional power.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	328	1470	<b><u>328</u></b>	<b><u>1470</u></b>	328	1470	48	328	1470	<b><u>328</u></b>	<b><u>1470</u></b>	328	1470
507.cactuBSSN_r	48	<b><u>151</u></b>	<b><u>402</u></b>	149	407	152	400	24	68.7	442	<b><u>68.2</u></b>	<b><u>445</u></b>	67.5	450
508.namd_r	48	250	182	<b><u>250</u></b>	<b><u>183</u></b>	249	183	48	250	182	<b><u>250</u></b>	<b><u>183</u></b>	249	183
510.parest_r	48	708	177	<b><u>709</u></b>	<b><u>177</u></b>	710	177	24	312	201	312	201	<b><u>312</u></b>	<b><u>201</u></b>
511.povray_r	48	383	293	<b><u>381</u></b>	<b><u>294</u></b>	381	294	48	<b><u>370</u></b>	<b><u>303</u></b>	370	303	371	302
519.lbm_r	48	<b><u>223</u></b>	<b><u>227</u></b>	222	228	223	227	48	<b><u>223</u></b>	<b><u>227</u></b>	222	228	223	227
521.wrf_r	48	361	298	341	315	<b><u>360</u></b>	<b><u>298</u></b>	24	206	261	<b><u>204</u></b>	<b><u>263</u></b>	199	270
526.blender_r	48	267	274	<b><u>266</u></b>	<b><u>275</u></b>	266	275	48	267	274	<b><u>266</u></b>	<b><u>275</u></b>	266	275
527.cam4_r	48	268	313	<b><u>264</u></b>	<b><u>317</u></b>	264	318	24	152	276	<b><u>152</u></b>	<b><u>277</u></b>	152	277
538.imagick_r	48	149	799	149	799	<b><u>149</u></b>	<b><u>799</u></b>	48	149	799	149	799	<b><u>149</u></b>	<b><u>799</u></b>
544.nab_r	48	142	567	<b><u>142</u></b>	<b><u>567</u></b>	143	566	48	142	567	<b><u>142</u></b>	<b><u>567</u></b>	143	566
549.fotonik3d_r	48	<b><u>537</u></b>	<b><u>349</u></b>	541	346	537	349	48	<b><u>537</u></b>	<b><u>349</u></b>	541	346	537	349
554.roms_r	48	479	159	<b><u>478</u></b>	<b><u>160</u></b>	478	160	24	218	175	218	175	<b><u>218</u></b>	<b><u>175</u></b>

SPECrate®2017\_fp\_base = **341**

SPECrate®2017\_fp\_peak = **343**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
We are using specific Kernel Version

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## General Notes (Continued)

system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

KTI Prefetch = Enable

LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Mon Sep 16 18:03:10 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. systemctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
18:03:10 up 5:29, 1 user, load average: 34.39, 44.66, 46.61

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
xeon	tty1	12:35	5:26m	0.88s	0.03s	login -- xeon

### 3. Username

From environment variable \$USER: xeon

### 4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126772
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126772
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- xeon
-bash
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) SILVER 4510
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 12
siblings       : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

physical id 1: core ids 0-11  
physical id 0: apicids 0-23  
physical id 1: apicids 64-87

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) SILVER 4510
BIOS Model name:       INTEL(R) XEON(R) SILVER 4510
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
Stepping:               8
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-11,24-35
NUMA node1 CPU(s):    12-23,36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-12  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 515674 MB
node 0 free: 500523 MB
node 1 cpus: 12-23,36-47
node 1 size: 516084 MB
node 1 free: 503440 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

9. /proc/meminfo

MemTotal: 1056521204 kB

10. who -r

run-level 3 Sep 16 12:34

11. Systemd service manager version: systemd 252 (252-18.el9)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlonger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmttoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltyty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```

gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiui0 kpatch
kvm_stat ledmon libvirt-guests libvirt0 lldpad man-db-restart-cache-update named
named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvmmf-autoconnect
ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysex target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecret0 virtstoraged
vsftpd wpa_supplicant

indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 4.10 GHz and 4.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

CPU2017 License: 006802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.3 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.3 (Plow)
system-release       Red Hat Enterprise Linux release 9.3 (Plow)
-----

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   856G  733G  124G  86% /home
-----

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:              Tyrone Systems
Product:             Tyrone Camarero SDI200A3N-212
Product Family:     Family
Serial:              A495115X4412722
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4400
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         American Megatrends International, LLC.
BIOS Version:        2.1a
BIOS Date:           03/20/2024
BIOS Revision:       5.32
-----

```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Technologies India Ltd)  
 Tyrone Camarero SDI200A3N-12  
 (2.40 GHz, Intel Xeon Silver 4510)

**SPECrate®2017\_fp\_base = 341**  
**SPECrate®2017\_fp\_peak = 343**

<b>CPU2017 License:</b> 006802	<b>Test Date:</b> Sep-2024
<b>Test Sponsor:</b> Netweb Technologies India Ltd	<b>Hardware Availability:</b> Dec-2023
<b>Tested by:</b> Tyrone Systems	<b>Software Availability:</b> Dec-2023

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran   | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```

## Base Compiler Invocation

C benchmarks:  
 icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

Tyrone Camarero SDI200A3N-212  
(2.40 GHz, Intel Xeon Silver 4510)

SPECrate®2017\_fp\_base = 341

SPECrate®2017\_fp\_peak = 343

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Technologies India Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.40 GHz, Intel Xeon Silver 4510)

**SPECrate®2017\_fp\_base = 341**

**SPECrate®2017\_fp\_peak = 343**

**CPU2017 License:** 006802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Sep-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-16 08:33:10-0400.

Report generated on 2024-10-09 14:01:38 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.