



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

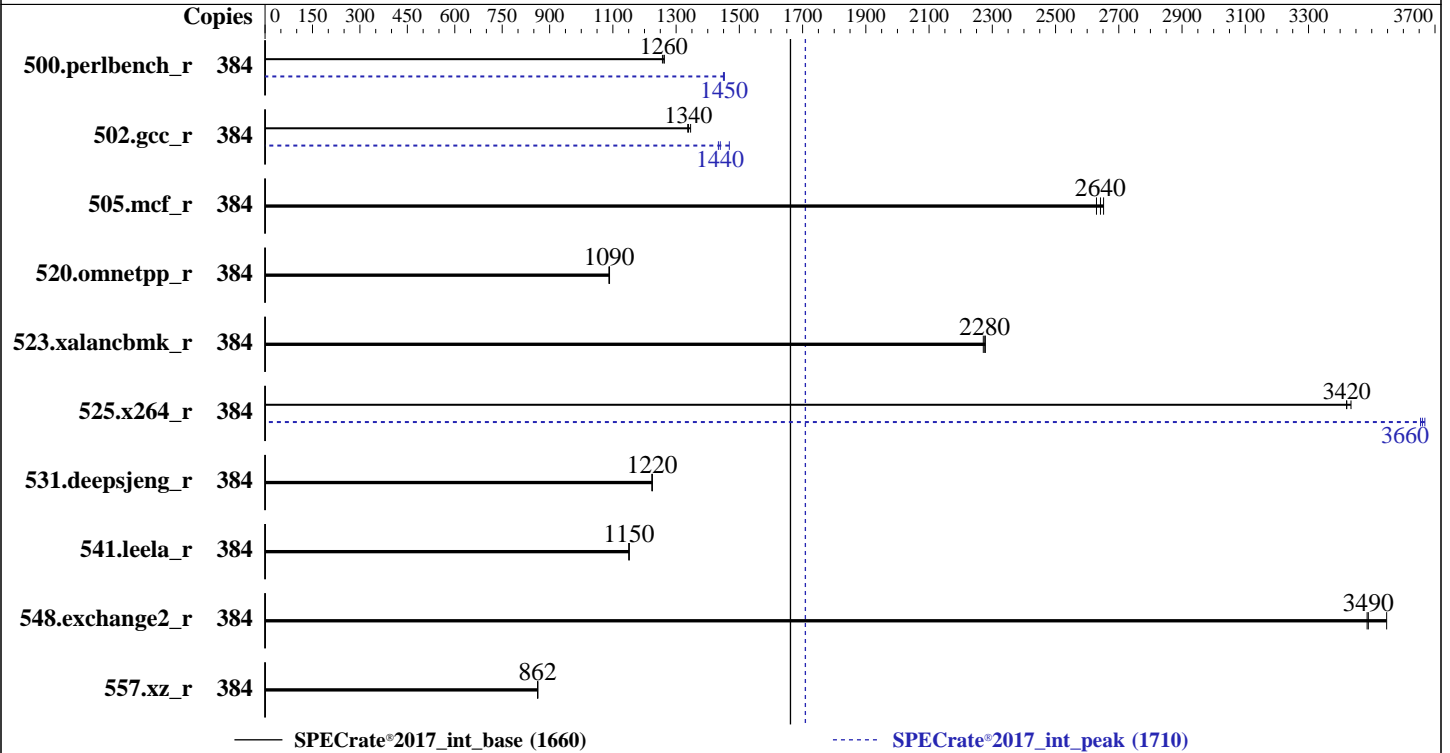

Hardware

CPU Name: Intel Xeon Platinum 8468H
 Max MHz: 3800
 Nominal: 2100
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Version 01.02.02.05 released Oct-2024
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	484	1260	485	1260	486	1260	384	421	1450	421	1450	422	1450
502.gcc_r	384	407	1340	404	1350	406	1340	384	370	1470	379	1430	378	1440
505.mcf_r	384	235	2640	236	2630	234	2650	384	235	2640	236	2630	234	2650
520.omnetpp_r	384	463	1090	462	1090	463	1090	384	463	1090	462	1090	463	1090
523.xalancbmk_r	384	178	2280	179	2270	178	2280	384	178	2280	179	2270	178	2280
525.x264_r	384	196	3430	197	3420	197	3420	384	184	3660	183	3670	184	3650
531.deepsjeng_r	384	359	1220	359	1220	360	1220	384	359	1220	359	1220	360	1220
541.leela_r	384	552	1150	553	1150	552	1150	384	552	1150	553	1150	552	1150
548.exchange2_r	384	284	3550	288	3490	289	3490	384	284	3550	288	3490	289	3490
557.xz_r	384	481	863	481	862	481	862	384	481	863	481	862	481	862

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Nov 29 09:56:23 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
09:56:23 up 3 min,  2 users,  load average: 0.20, 0.16, 0.07
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      :l       09:54   ?xdm?  31:42  0.00s /usr/libexec/gdm-x-session --register-session --run-script
gnome-session
root      pts/0    09:54   29.00s  1.10s  0.02s -bash
```

```
3. Username
From environment variable $USER:  root
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124863
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124863
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 384 -c ic2024.0.2-lin-sierraforest-rate-20231213.cfg
--define smt-on --define cores=192 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all intrate
runcpu --define default-platform-flags --copies 384 --configfile
ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000590
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
physical id 2: apicids 256-351

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 3: apicids 384-479

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8468H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8468H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             4
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_l1d arch_capabilities

```

Virtualization:

```

VT-x
L1d cache:            9 MiB (192 instances)
L1i cache:            6 MiB (192 instances)
L2 cache:             384 MiB (192 instances)
L3 cache:             420 MiB (4 instances)
NUMA node(s):         16
NUMA node0 CPU(s):   0-11,192-203
NUMA node1 CPU(s):   12-23,204-215
NUMA node2 CPU(s):   24-35,216-227
NUMA node3 CPU(s):   36-47,228-239
NUMA node4 CPU(s):   48-59,240-251
NUMA node5 CPU(s):   60-71,252-263
NUMA node6 CPU(s):   72-83,264-275
NUMA node7 CPU(s):   84-95,276-287
NUMA node8 CPU(s):   96-107,288-299
NUMA node9 CPU(s):   108-119,300-311
NUMA node10 CPU(s):  120-131,312-323
NUMA node11 CPU(s):  132-143,324-335

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

NUMA node12 CPU(s):      144-155,336-347
NUMA node13 CPU(s):      156-167,348-359
NUMA node14 CPU(s):      168-179,360-371
NUMA node15 CPU(s):      180-191,372-383
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-11,192-203
node 0 size: 63739 MB
node 0 free: 62884 MB
node 1 cpus: 12-23,204-215
node 1 size: 64506 MB
node 1 free: 64178 MB
node 2 cpus: 24-35,216-227
node 2 size: 64506 MB
node 2 free: 64111 MB
node 3 cpus: 36-47,228-239
node 3 size: 64506 MB
node 3 free: 64169 MB
node 4 cpus: 48-59,240-251
node 4 size: 64506 MB
node 4 free: 64192 MB
node 5 cpus: 60-71,252-263
node 5 size: 64506 MB
node 5 free: 64191 MB
node 6 cpus: 72-83,264-275
node 6 size: 64506 MB
node 6 free: 63817 MB
node 7 cpus: 84-95,276-287
node 7 size: 64470 MB
node 7 free: 64153 MB
node 8 cpus: 96-107,288-299
node 8 size: 64506 MB
node 8 free: 64168 MB
node 9 cpus: 108-119,300-311
node 9 size: 64506 MB
node 9 free: 64174 MB
node 10 cpus: 120-131,312-323
node 10 size: 64506 MB
node 10 free: 64256 MB
node 11 cpus: 132-143,324-335
node 11 size: 64506 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

node 11 free: 64161 MB
node 12 cpus: 144-155,336-347
node 12 size: 64506 MB
node 12 free: 64142 MB
node 13 cpus: 156-167,348-359
node 13 size: 64506 MB
node 13 free: 63959 MB
node 14 cpus: 168-179,360-371
node 14 size: 64506 MB
node 14 free: 62388 MB
node 15 cpus: 180-191,372-383
node 15 size: 64477 MB
node 15 free: 64128 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4:  21 21 21 21 10 12 12 12 12 21 21 21 21 21 21 21
5:  21 21 21 21 12 10 12 12 12 21 21 21 21 21 21 21
6:  21 21 21 21 12 12 10 12 12 21 21 21 21 21 21 21
7:  21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8:  21 21 21 21 21 21 21 21 10 12 12 12 12 21 21 21
9:  21 21 21 21 21 21 21 21 12 10 12 12 12 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 12 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
15: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
MemTotal:      1056026856 kB

```

```

10. who -r
run-level 5 Nov 29 09:54

```

```

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
graphical          running

```

```

12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rshmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgauthd vmttoolsd
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower
cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit iprupdate
iscsid iscsiuiop kpatch kvm_stat ledmon man-db-restart-cache-update nftables

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

indirect
nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmbd-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   201G  18G  184G   9% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      XFUSION
Product:     2488H V7
Product Family: EagleStream
```

21. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      XFUSION
BIOS Version:     01.02.02.05
BIOS Date:        10/17/2024
```

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Peak Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-28 20:56:22-0500.

Report generated on 2024-12-18 18:25:30 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.