



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

### meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

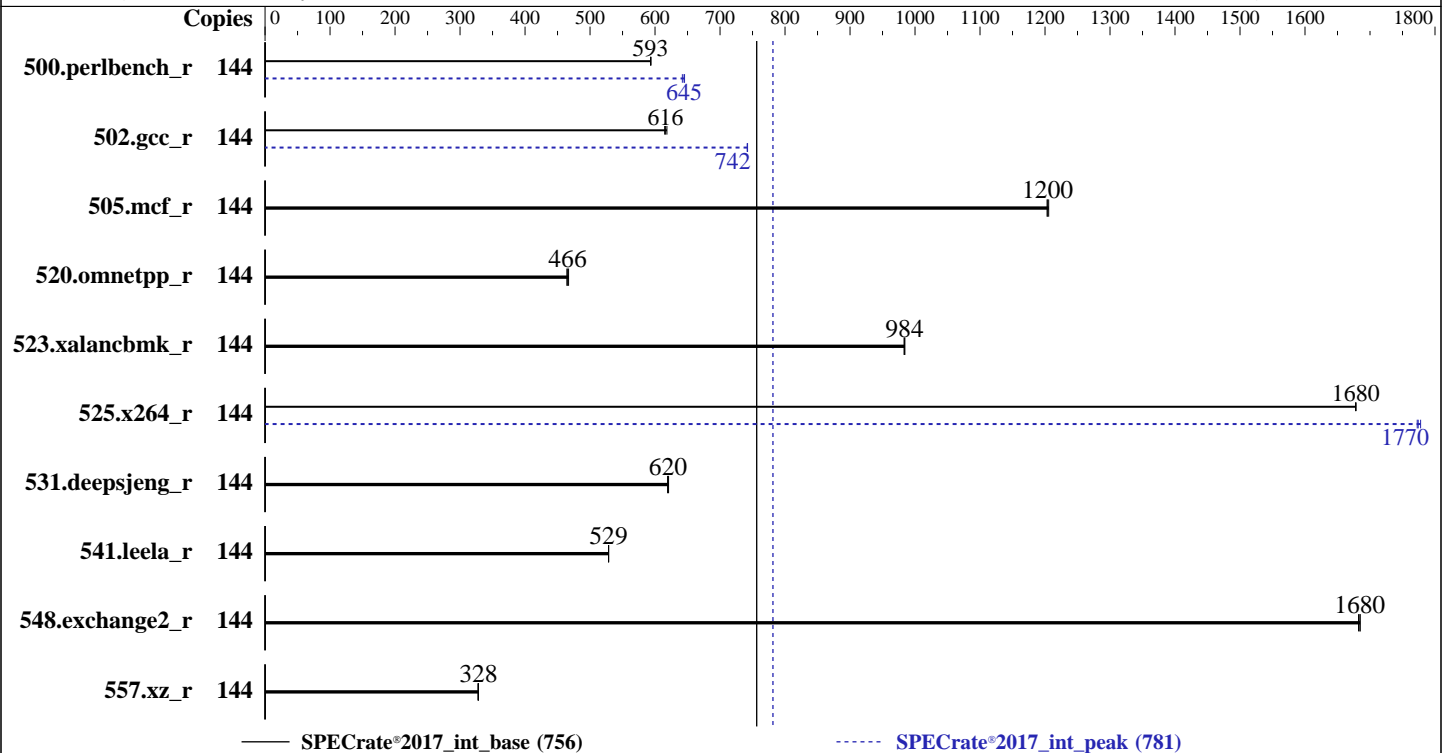

### Hardware

CPU Name: Intel Xeon 6736P  
 Max MHz: 4100  
 Nominal: 2000  
 Enabled: 72 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 144 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 02.03.00 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	386	594	<b>386</b>	<b>593</b>	386	593	144	<b>356</b>	<b>645</b>	355	645	357	642
502.gcc_r	144	<b>331</b>	<b>616</b>	332	615	330	618	144	275	742	275	742	<b>275</b>	<b>742</b>
505.mcf_r	144	193	1200	193	1210	<b>193</b>	<b>1200</b>	144	193	1200	193	1210	<b>193</b>	<b>1200</b>
520.omnetpp_r	144	<b>406</b>	<b>466</b>	407	464	405	467	144	<b>406</b>	<b>466</b>	407	464	405	467
523.xalancbmk_r	144	155	984	155	983	<b>155</b>	<b>984</b>	144	155	984	155	983	<b>155</b>	<b>984</b>
525.x264_r	144	150	1680	<b>150</b>	<b>1680</b>	150	1680	144	142	1770	<b>142</b>	<b>1770</b>	142	1780
531.deepsjeng_r	144	<b>266</b>	<b>620</b>	266	619	266	621	144	<b>266</b>	<b>620</b>	266	619	266	621
541.leela_r	144	451	528	451	529	<b>451</b>	<b>529</b>	144	451	528	451	529	<b>451</b>	<b>529</b>
548.exchange2_r	144	<b>224</b>	<b>1680</b>	224	1680	224	1680	144	<b>224</b>	<b>1680</b>	224	1680	224	1680
557.xz_r	144	<b>474</b>	<b>328</b>	475	327	474	328	144	<b>474</b>	<b>328</b>	475	327	474	328

SPECrate®2017\_int\_base = 756

SPECrate®2017\_int\_peak = 781

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
SNC set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri Mar 21 07:31:52 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
07:31:52 up 1 min,  1 user,  load average: 0.26, 0.18, 0.07
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -             07:31   8.00s  1.44s  0.03s -bash

```

```

3. Username
From environment variable $USER:  root

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

```

-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 4124509
   max locked memory      (kbytes, -l) 8192
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 4124509
   virtual memory         (kbytes, -v) unlimited
   file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=31
   login -- root
   -bash
   -bash
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
     ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
     ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
     --runmode rate --tune base:peak --size reflate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.035/temlogs/preenv.intrate.035.0.log --lognum 035.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/CPU2017

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6736P
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 173
   stepping       : 1
   microcode      : 0x1000341
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
   cpu cores      : 36
   siblings       : 72
   2 physical ids (chips)
   144 processors (hardware threads)
   physical id 0: core ids 0-35
   physical id 1: core ids 0-35
   physical id 0: apicids 0-71
   physical id 1: apicids 128-199
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      144
On-line CPU(s) list:        0-143
Vendor ID:                   GenuineIntel
BIOS Vendor ID:             Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6736P
BIOS Model name:            Intel(R) Xeon(R) 6736P  CPU @ 2.0GHz
BIOS CPU family:            179
CPU family:                  6
Model:                       173
Thread(s) per core:         2
Core(s) per socket:         36
Socket(s):                   2
Stepping:                    1
CPU(s) scaling MHz:         20%
CPU max MHz:                 4100.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                             pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                             xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                             invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                             wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                             hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                             rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities
Lld cache:                   3.4 MiB (72 instances)
L1i cache:                   4.5 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    288 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):          0-35,72-107
NUMA node1 CPU(s):          36-71,108-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

### Platform Notes (Continued)

Vulnerability Srbds:

Vulnerability Tsx async abort:

PBR SB-eIBRS Not affected; BHI BHI\_DIS\_S

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-35,72-107

node 0 size: 515488 MB

node 0 free: 513688 MB

node 1 cpus: 36-71,108-143

node 1 size: 515663 MB

node 1 free: 514646 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 1055900612 kB

10. who -r

run-level 3 Mar 21 07:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

```

enabled      apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
              kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels
              rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
              wickedd-nanny
enabled-runtime systemd-remount-fs
disabled     boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
              exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievd issue-add-ssh-keys
              kexec-load lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@
              systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex
              systemd-time-wait-sync systemd-timesyncd
generated    jexec
indirect     systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=97ebf558-7124-402b-b21a-aea761c5c8d0

splash=silent

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

```

resume=/dev/disk/by-uuid/d3b5c251-8c9f-43f0-9e42-f93d8f2e68b2
mitigations=auto
quiet
security=apparmor
crashkernel=370M,high
crashkernel=72M,low

```

### 14. cpupower frequency-info

```

analyzing CPU 74:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

### 15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0

```

### 16. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

### 18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

### 19. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	1.3T	306G	939G	25%	/home

### 20. /sys/devices/virtual/dmi/id

Vendor: IEIT SYSTEMS  
 Product: NF5466-M8-A0-R0-00  
 Product Family: Not specified  
 Serial: 00000000

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
 BIOS Version: 02.03.00  
 BIOS Date: 02/14/2025

## Compiler Version Notes

```
=====  
C | 502.gcc_r(peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)  
| 557.xz_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
C | 502.gcc_r(peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)  
| 557.xz_r(base, peak)  
=====
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 756

meta brain NF5466G8 (Intel Xeon 6736P)

SPECrate®2017\_int\_peak = 781

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Mar-2025

**Hardware Availability:** Apr-2025

**Software Availability:** Jun-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-20 20:31:51-0400.

Report generated on 2025-04-09 14:56:05 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.