



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12


(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

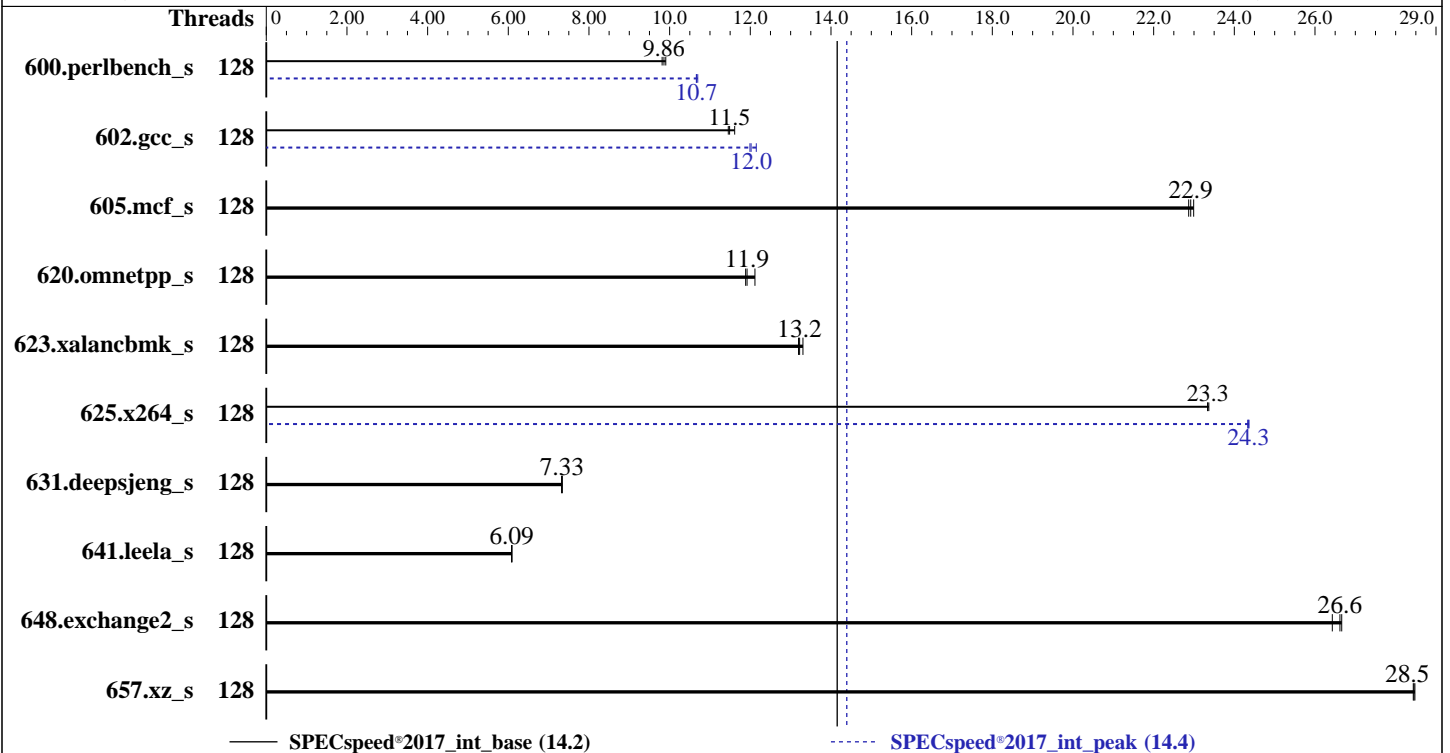

Hardware

CPU Name: Intel Xeon 6767P
 Max MHz: 3900
 Nominal: 2400
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 336 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 3.2 TB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	128	181	9.81	180	9.86	179	9.90	128	166	10.7	166	10.7	166	10.7
602.gcc_s	128	348	11.5	343	11.6	347	11.5	128	331	12.0	328	12.1	332	12.0
605.mcf_s	128	206	22.9	205	23.0	206	22.9	128	206	22.9	205	23.0	206	22.9
620.omnetpp_s	128	137	11.9	137	11.9	135	12.1	128	137	11.9	137	11.9	135	12.1
623.xalancbmk_s	128	107	13.2	107	13.3	107	13.2	128	107	13.2	107	13.3	107	13.2
625.x264_s	128	75.5	23.4	75.6	23.3	75.6	23.3	128	72.4	24.4	72.5	24.3	72.4	24.3
631.deepsjeng_s	128	195	7.34	196	7.32	195	7.33	128	195	7.34	196	7.32	195	7.33
641.leela_s	128	280	6.09	280	6.09	280	6.09	128	280	6.09	280	6.09	280	6.09
648.exchange2_s	128	110	26.6	111	26.4	110	26.7	128	110	26.6	111	26.4	110	26.7
657.xz_s	128	217	28.5	217	28.5	217	28.4	128	217	28.5	217	28.5	217	28.4

SPECspeed®2017_int_base = **14.2**

SPECspeed®2017_int_peak = **14.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Intel UPI Prefetch set to disabled
Intel Hyper-Threading set to Disabled
Sub-NUMA Clustering set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 12 06:58:50 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
06:58:50 up 1 min, 4 users, load average: 1.50, 0.57, 0.20
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size          (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size              (blocks, -f) unlimited
   pending signals        (-i) 2062713
   max locked memory      (kbytes, -l) 8192
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 2062713
   virtual memory         (kbytes, -v) unlimited
   file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root [priv]
   sshd: root@notty
   bash -c cd $SPEC/ && $SPEC/intspeed_spr.sh
   runcpu --nobuild --action validate --define default-platform-flags -c
         ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base,peak -o all --define
         intspeedaffinity --define drop_caches intspeed
   runcpu --nobuild --action validate --define default-platform-flags --configfile
         ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base,peak --output_format all
         --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
         intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
         --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6767P
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 173
   stepping       : 1
   microcode      : 0x1000380
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
   cpu cores      : 64
   siblings       : 64
   2 physical ids (chips)
   128 processors (hardware threads)
   physical id 0: core ids 0-31,64-95
   physical id 1: core ids 0-31,64-95
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,128,130,132,13
   4,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186
   ,188,190
   physical id 1: apicids
   256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
   08,310,312,314,316,318,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,42
   4,426,428,430,432,434,436,438,440,442,444,446
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12
(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      128
On-line CPU(s) list:        0-127
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6767P
BIOS Model name:             Intel(R) Xeon(R) 6767P  CPU @ 2.4GHz
BIOS CPU family:            179
CPU family:                  6
Model:                      173
Thread(s) per core:         1
Core(s) per socket:         64
Socket(s):                   2
Stepping:                   1
BogoMIPS:                   4800.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                             la57 rdpid bus_lock_detect cldemote movdiri movdir64b engcmd fsrm
                             md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                             amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   6 MiB (128 instances)
L1i cache:                   8 MiB (128 instances)
L2 cache:                    256 MiB (128 instances)
L3 cache:                    672 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-31
NUMA node1 CPU(s):           32-63
NUMA node2 CPU(s):           64-95
NUMA node3 CPU(s):           96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31
node 0 size: 128703 MB
node 0 free: 126896 MB
node 1 cpus: 32-63
node 1 size: 129015 MB
node 1 free: 128362 MB
node 2 cpus: 64-95
node 2 size: 129015 MB
node 2 free: 128528 MB
node 3 cpus: 96-127
node 3 size: 128974 MB
node 3 free: 128356 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 528085960 kB

10. who -r

run-level 3 Mar 12 06:58

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```

disabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
              autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
              chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
              exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
              issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
              omtree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
              smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
              systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
              systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect      pcsd saned@ systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=4461ad3b-5550-46a9-a453-c296e0e04d21
splash=silent
resume=/dev/disk/by-uuid/930cc1e7-2c0e-48d3-84ad-33c84ff87515
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 15:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 1.9T 795G 1.2T 42% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: HPE ProLiant Compute DL380 Gen12
Product Family: ProLiant
Serial: CNXD1M02CD

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.11

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

```

=====
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
         | 641.leela_s(base, peak)
=====

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran  | 648.exchange2_s(base, peak)
=====

```

```

-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>



SPEC CPU[®]2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECspeed[®]2017_int_base = 14.2

SPECspeed[®]2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.9 on 2025-03-11 21:28:50-0400.
Report generated on 2025-04-09 14:56:36 by CPU2017 PDF formatter v6716.
Originally published on 2025-04-09.