



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12


(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

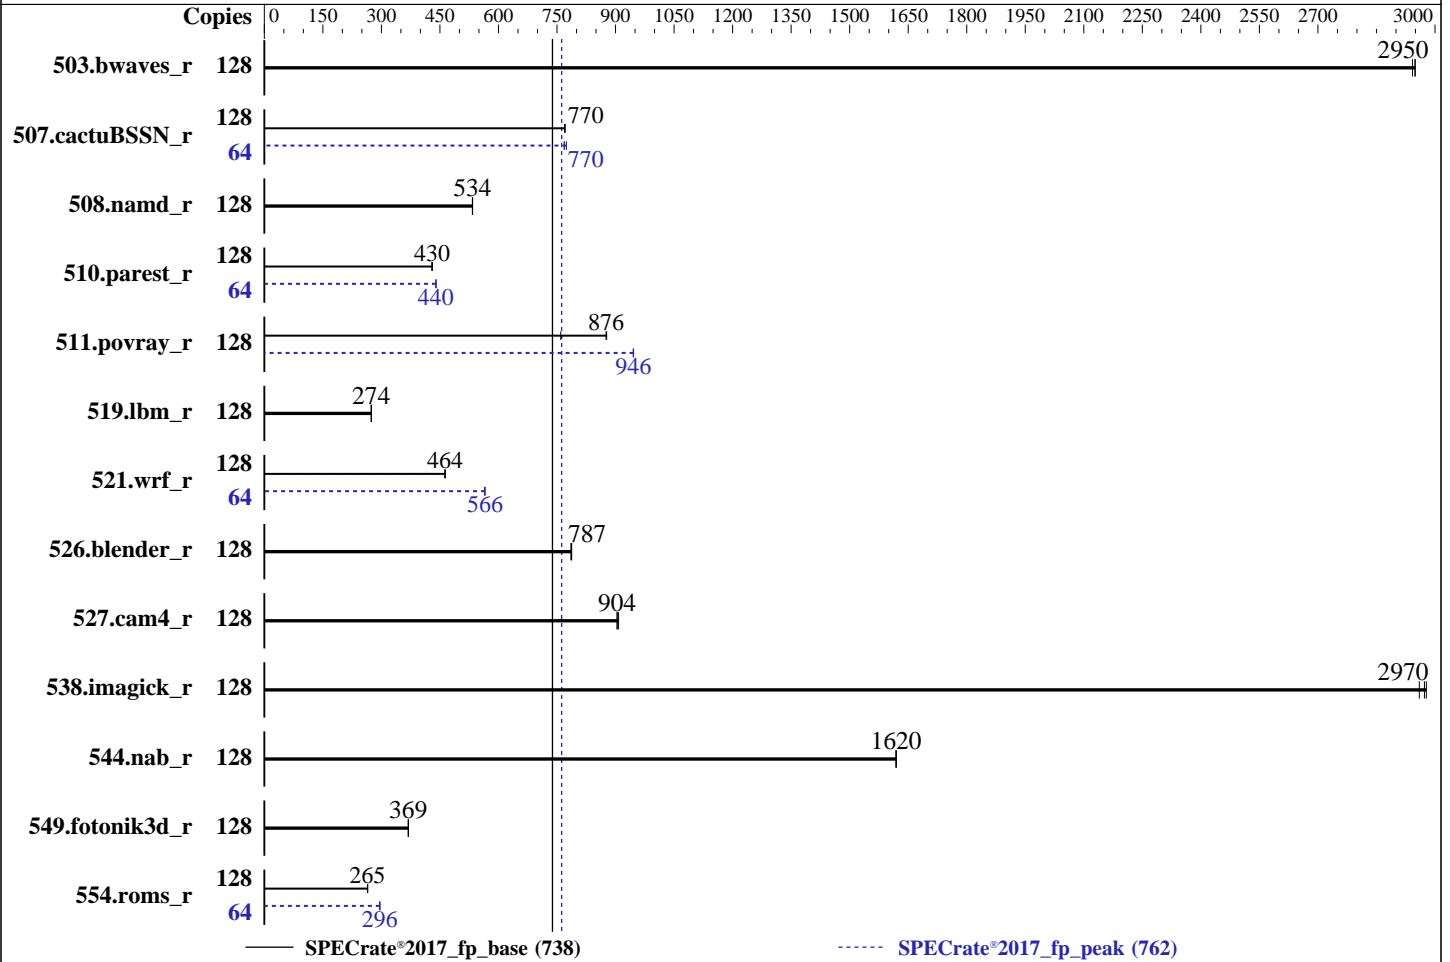

Hardware

CPU Name: Intel Xeon 6767P
 Max MHz: 3900
 Nominal: 2400
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 336 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 1.2 TB NVMe SSD
 Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12
(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	435	2950	436	2940	435	2950	128	435	2950	436	2940	435	2950
507.cactuBSSN_r	128	210	770	210	770	210	770	64	105	768	105	770	105	774
508.namd_r	128	228	534	228	533	228	534	128	228	534	228	533	228	534
510.parest_r	128	778	431	780	429	778	430	64	381	440	381	440	381	440
511.povray_r	128	341	876	393	760	341	877	128	316	946	316	946	316	946
519.lbm_r	128	492	274	492	274	492	274	128	492	274	492	274	492	274
521.wrf_r	128	620	463	619	464	619	464	64	254	566	253	566	254	564
526.blender_r	128	248	788	248	786	248	787	128	248	788	248	786	248	787
527.cam4_r	128	248	904	247	908	248	904	128	248	904	247	908	248	904
538.imagick_r	128	107	2970	108	2960	107	2980	128	107	2970	108	2960	107	2980
544.nab_r	128	133	1620	133	1620	133	1620	128	133	1620	133	1620	133	1620
549.fotonik3d_r	128	1350	369	1351	369	1353	369	128	1350	369	1351	369	1353	369
554.roms_r	128	768	265	769	265	768	265	64	343	296	344	296	344	296

SPECrate®2017_fp_base = **738**

SPECrate®2017_fp_peak = **762**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Workload Profile set to Custom
DCU Stream Prefetcher set to Disabled
Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Feb 28 16:50:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
16:50:44 up 5:24, 8 users, load average: 73.24, 113.89, 122.22
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.17.1.114 22Apr24 ? 0.02s 0.02s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1030551
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1030551
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpratespron.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6767P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000380
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6767P
BIOS Model name:      Intel(R) Xeon(R) 6767P  CPU @ 2.4GHz
BIOS CPU family:      179
CPU family:            6
Model:                 173
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             1
Stepping:              1
BogoMIPS:              4800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vmmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization:       VT-x
L1d cache:            3 MiB (64 instances)
L1i cache:            4 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              336 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):   0-31,64-95
NUMA node1 CPU(s):   32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Srbds:
Vulnerability Tsx async abort:

PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 128695 MB
node 0 free: 99887 MB
node 1 cpus: 32-63,96-127
node 1 size: 128967 MB
node 1 free: 102281 MB
node distances:
node 0 1
0: 10 12
1: 12 10
```

9. /proc/meminfo

```
MemTotal: 263846616 kB
```

10. who -r

```
run-level 3 Apr 22 17:30
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=84964d71-b738-4181-8365-490a27ae412d
splash=silent
resume=/dev/disk/by-uuid/d32c8d7d-0388-4dc2-a4d2-6ac3b24bfd85
mitigations=auto
quiet
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

security=apparmor

```

-----
14. cpupower frequency-info
analyzing CPU 77:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   1.2T  247G  951G  21% /home

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute DL320 Gen12
Product Family: ProLiant
Serial: S84PQDRU0T

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
8x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.11

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017_fp_base = 738

SPECrate®2017_fp_peak = 762

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-28 06:20:43-0500.

Report generated on 2025-04-09 14:58:02 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.