



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

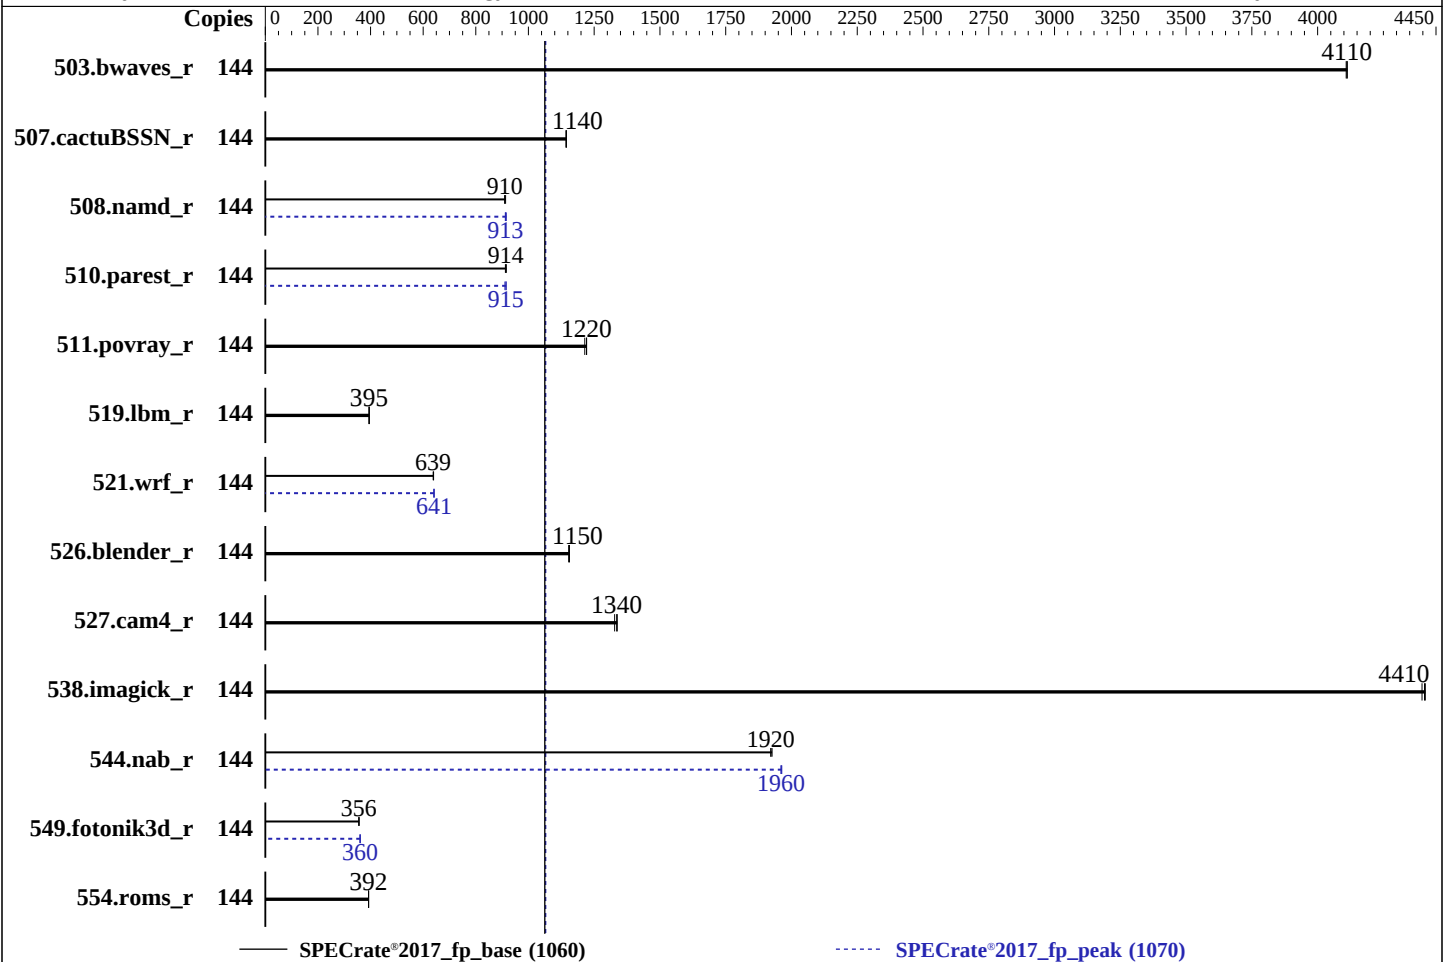

Hardware

CPU Name: AMD EPYC 9825
Max MHz: 3700
Nominal: 2200
Enabled: 144 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 12 cores
Other: None
Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
Kernel 5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	351	4110	<u>351</u>	<u>4110</u>	351	4110	144	351	4110	<u>351</u>	<u>4110</u>	351	4110
507.cactuBSSN_r	144	159	1140	159	1140	<u>159</u>	<u>1140</u>	144	159	1140	159	1140	<u>159</u>	<u>1140</u>
508.namd_r	144	150	910	150	913	<u>150</u>	<u>910</u>	144	<u>150</u>	<u>913</u>	149	916	150	912
510.parest_r	144	<u>412</u>	<u>914</u>	413	913	411	916	144	<u>412</u>	<u>915</u>	414	911	412	915
511.povray_r	144	<u>275</u>	<u>1220</u>	277	1210	275	1220	144	<u>275</u>	<u>1220</u>	277	1210	275	1220
519.lbm_r	144	384	395	385	395	<u>385</u>	<u>395</u>	144	384	395	385	395	<u>385</u>	<u>395</u>
521.wrf_r	144	504	640	505	639	<u>505</u>	<u>639</u>	144	503	641	<u>503</u>	<u>641</u>	503	641
526.blender_r	144	<u>190</u>	<u>1150</u>	190	1150	190	1160	144	<u>190</u>	<u>1150</u>	190	1150	190	1160
527.cam4_r	144	190	1330	<u>189</u>	<u>1340</u>	188	1340	144	190	1330	<u>189</u>	<u>1340</u>	188	1340
538.imagick_r	144	81.2	4410	81.5	4400	<u>81.3</u>	<u>4410</u>	144	81.2	4410	81.5	4400	<u>81.3</u>	<u>4410</u>
544.nab_r	144	<u>126</u>	<u>1920</u>	126	1920	126	1930	144	124	1960	<u>124</u>	<u>1960</u>	123	1960
549.fotonik3d_r	144	1576	356	1579	355	<u>1577</u>	<u>356</u>	144	1559	360	<u>1557</u>	<u>360</u>	1555	361
554.roms_r	144	<u>583</u>	<u>392</u>	583	392	583	393	144	<u>583</u>	<u>392</u>	583	392	583	393

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

L1 Stride Prefetcher set to Disabled

SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Fri Mar 21 20:59:13 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:59:13 up 4 min,  0 users,  load average: 0.08, 0.11, 0.05
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 1545804
max locked memory           (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes           (-u) 1545804
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.435/templogs/preenv.fprate.435.0.log --lognum 435.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
6. /proc/cpuinfo
   model name      : AMD EPYC 9825 144-Core Processor
   vendor_id       : AuthenticAMD
   cpu family      : 26
   model           : 17
   stepping        : 0
   microcode       : 0xb101025
   bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size        : 192 4K pages
   cpu cores       : 144
   siblings        : 144
   1 physical ids (chips)
   144 processors (hardware threads)
   physical id 0:  core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
   physical id 0:  apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	144
On-line CPU(s) list:	0-143
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9825 144-Core Processor
BIOS Model name:	AMD EPYC 9825 144-Core Processor
CPU family:	26
Model:	17
Thread(s) per core:	1
Core(s) per socket:	144
Socket(s):	1
Stepping:	0
BogoMIPS:	4393.52
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization: AMD-V
L1d cache: 6.8 MiB (144 instances)
L1i cache: 4.5 MiB (144 instances)
L2 cache: 144 MiB (144 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-35
NUMA node1 CPU(s): 36-71
NUMA node2 CPU(s): 72-107
NUMA node3 CPU(s): 108-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP disabled, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6.8M	12	Data	1	64	1	64
L1i	32K	4.5M	8	Instruction	1	64	1	64
L2	1M	144M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-35

node 0 size: 96337 MB

node 0 free: 95633 MB

node 1 cpus: 36-71

node 1 size: 96758 MB

node 1 free: 96125 MB

node 2 cpus: 72-107

node 2 size: 96717 MB

node 2 free: 96083 MB

node 3 cpus: 108-143

node 3 size: 96676 MB

node 3 free: 95759 MB

node distances:

node 0 1 2 3

0: 10 12 12 12

1: 12 10 12 12

2: 12 12 10 12

3: 12 12 12 10

9. /proc/meminfo

MemTotal: 395765964 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

10. who -r
run-level 3 Mar 21 20:56

11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
mdmonitor microcode nis-domainname rhsmcrted rsyslog rtkit-daemon selinux-autorelabel-mark
sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
systemd-remount-fs
enabled-runtime canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
disabled chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm
rhsm-facts rpmbd-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=273c79f3-13a9-4ae6-9c36-e82799318ef8
ro
resume=UUID=19c8733f-555f-4142-8f61-7554d0dc64ae

15. cpupower frequency-info
analyzing CPU 120:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 36800MHz

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
system-release  Red Hat Enterprise Linux release 9.4 (Plow)
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   372G  107G  265G  29% /home
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR635V3
Product Family: ThinkSystem
Serial:      1234567890
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x SK Hynix HMC88AHBRA290N 32 GB 2 rank 6400, configured at 6000
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

BIOS Version: KAE131I-5.30
BIOS Date: 12/17/2024
BIOS Revision: 5.30
Firmware Revision: 54.6

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl, -mllvm -Wl, -enable-aggressive-gather=true  
-Wl, -mllvm -Wl, -enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=2000000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIB -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

521.wrf_r (continued):

-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017_fp_base = 1060

SPECrate®2017_fp_peak = 1070

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-21 08:59:12-0400.

Report generated on 2025-04-09 14:59:37 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.