



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

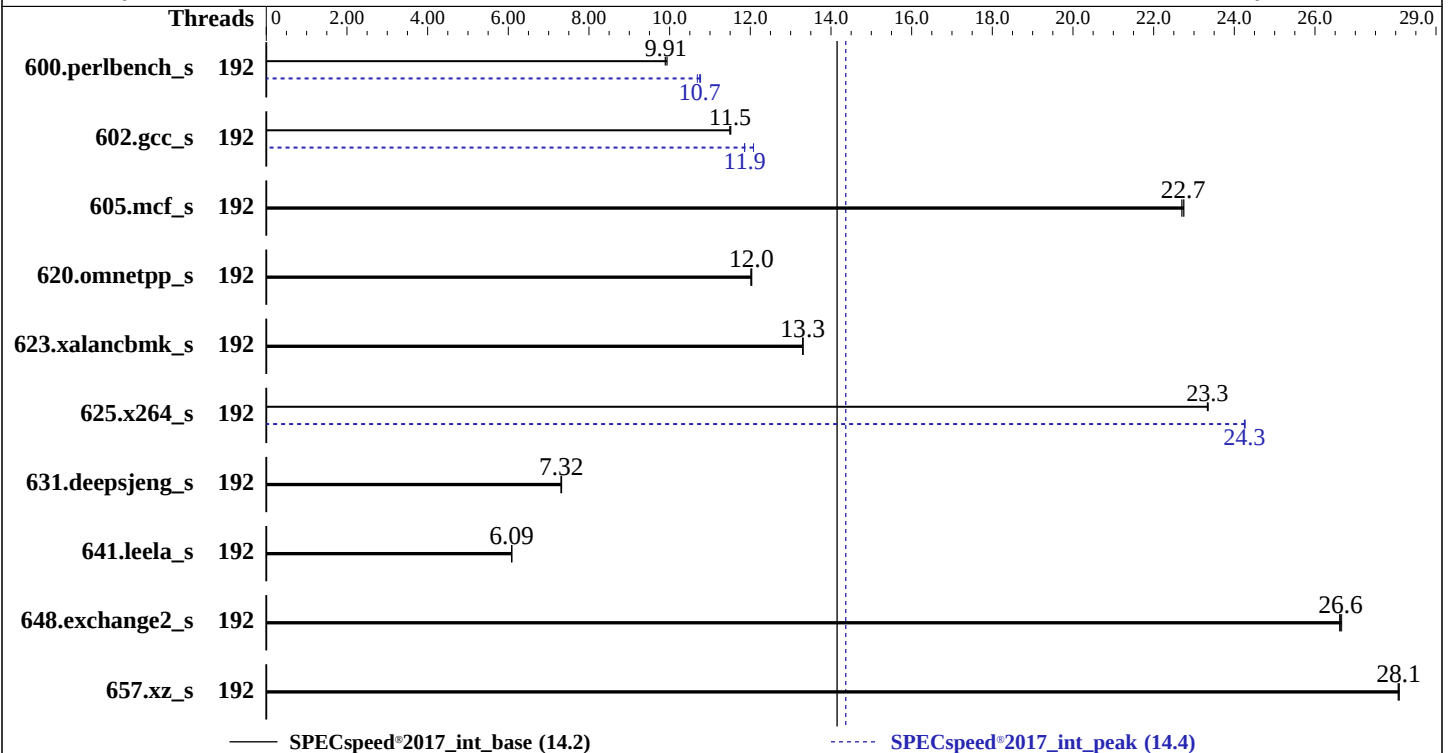

Hardware

CPU Name: Intel Xeon 6747P
Max MHz: 3900
Nominal: 2700
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 288 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.0 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	179	9.89	179	9.94	179	9.91	192	166	10.7	165	10.8	165	10.7
602.gcc_s	192	346	11.5	346	11.5	347	11.5	192	336	11.9	330	12.1	336	11.9
605.mcf_s	192	208	22.7	208	22.8	208	22.7	192	208	22.7	208	22.8	208	22.7
620.omnetpp_s	192	136	12.0	136	12.0	135	12.0	192	136	12.0	136	12.0	135	12.0
623.xalanchmk_s	192	106	13.3	107	13.3	107	13.3	192	106	13.3	107	13.3	107	13.3
625.x264_s	192	75.6	23.3	75.6	23.3	75.5	23.4	192	72.7	24.3	72.7	24.2	72.7	24.3
631.deepsjeng_s	192	196	7.32	196	7.32	196	7.30	192	196	7.32	196	7.32	196	7.30
641.leela_s	192	280	6.09	280	6.09	280	6.08	192	280	6.09	280	6.09	280	6.08
648.exchange2_s	192	110	26.7	110	26.6	110	26.6	192	110	26.7	110	26.6	110	26.6
657.xz_s	192	220	28.1	220	28.1	220	28.1	192	220	28.1	220	28.1	220	28.1

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
Sub-NUMA Clustering (SNC) set to Enabled
Intel UPI Prefetch set to disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Apr 15 01:50:04 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
01:50:04 up 1 min, 3 users, load average: 0.19, 0.08, 0.03
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062668
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062668
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/SMT_ON_intspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=96 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=96 --tune base,peak --output_format all
--define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6747P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23,64-87
physical id 1: core ids 0-23,64-87
physical id 0: apicids 0-47,128-175
physical id 1: apicids 256-303,384-431
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6747P
BIOS Model name: Intel(R) Xeon(R) 6747P CPU @ 2.7GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
Stepping: 1
BogoMIPS: 5400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 4.5 MiB (96 instances)
L1i cache: 6 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 576 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	64K	6M	16	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	288M	576M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-23,96-119

node 0 size: 128699 MB

node 0 free: 128066 MB

node 1 cpus: 24-47,120-143

node 1 size: 129011 MB

node 1 free: 128560 MB

node 2 cpus: 48-71,144-167

node 2 size: 129011 MB

node 2 free: 127755 MB

node 3 cpus: 72-95,168-191

node 3 size: 128970 MB

node 3 free: 128322 MB

node distances:

node	0	1	2	3
0:	10	12	21	21
1:	12	10	21	21
2:	21	21	10	12
3:	21	21	12	10

9. /proc/meminfo

MemTotal: 528069124 kB

10. who -r

run-level 3 Apr 15 01:49

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-sysextd systemd-time-wait-sync systemd-timesyncd target-isns targetcli targetclid
tuned

indirect pcsd systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=b0926514-f0bc-4e0d-a689-28681d2f7407
splash=silent
resume=/dev/disk/by-uuid/9d2c3727-2c1d-4a08-944c-470254403bf8
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
   analyzing CPU 103:
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes
```

```
-----
15. tuned-adm active
   It seems that tuned daemon is not running, preset profile is not activated.
   Preset profile: balanced
```

```
-----
16. sysctl
   kernel.numa_balancing          1
   kernel.randomize_va_space      2
   vm.compaction_proactiveness     20
   vm.dirty_background_bytes       0
   vm.dirty_background_ratio       10
   vm.dirty_bytes                  0
   vm.dirty_expire_centisecs       3000
   vm.dirty_ratio                  20
   vm.dirty_writeback_centisecs    500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold            500
   vm.min_unmapped_ratio           1
   vm.nr_hugepages                 0
   vm.nr_hugepages_mempolicy        0
   vm.nr_overcommit_hugepages      0
   vm.swappiness                   60
   vm.watermark_boost_factor       15000
   vm.watermark_scale_factor        10
   vm.zone_reclaim_mode            0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled          [always] madvice never
   hpage_pmd_size   2097152
   shmem_enabled    always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none           511
   max_ptes_shared         256
   max_ptes_swap           64
   pages_to_scan           4096
   scan_sleep_millisecs    10000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

19. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	390G	198G	193G	51%	/home

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute ML350 Gen12
Product Family: ProLiant
Serial: CNXD1M00H8

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.11

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.70 GHz, Intel Xeon 6747P)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-14 16:50:04-0400.

Report generated on 2025-05-08 10:02:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.