



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

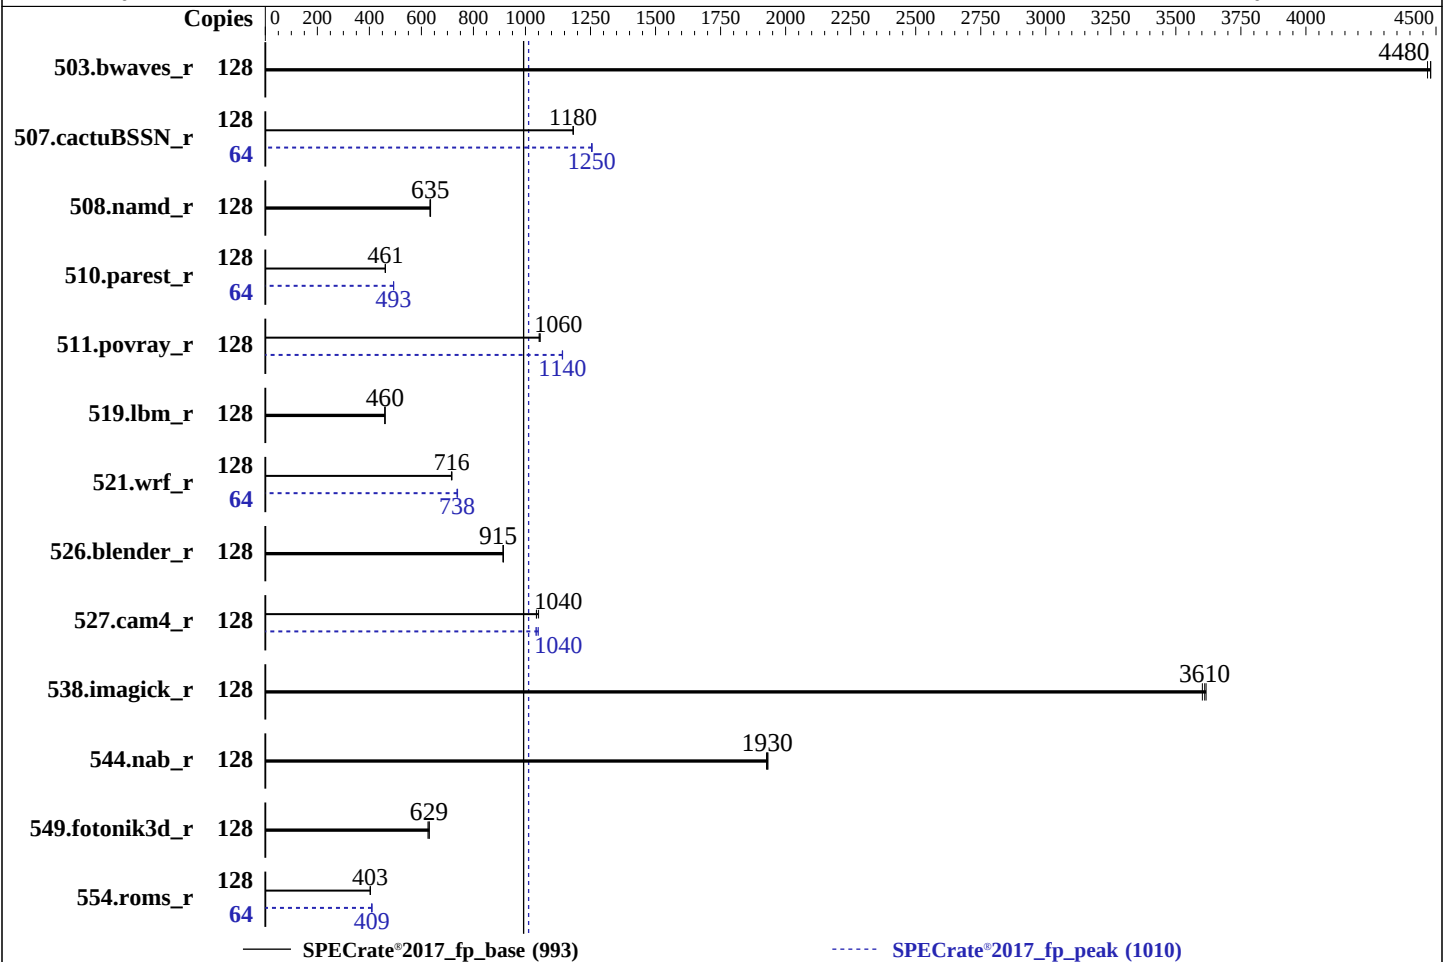

Hardware

CPU Name: Intel Xeon 6732P
Max MHz: 4300
Nominal: 3800
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 144 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.2 TB NVMe SSD
Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	287	4470	<u>287</u>	<u>4480</u>	287	4480	128	287	4470	<u>287</u>	<u>4480</u>	287	4480
507.cactuBSSN_r	128	137	1180	<u>137</u>	<u>1180</u>	137	1180	64	64.6	1250	<u>64.6</u>	<u>1250</u>	64.5	1260
508.namd_r	128	192	633	191	635	<u>192</u>	<u>635</u>	128	192	633	191	635	<u>192</u>	<u>635</u>
510.parest_r	128	<u>726</u>	<u>461</u>	726	461	725	462	64	339	493	340	493	<u>340</u>	<u>493</u>
511.povray_r	128	283	1060	<u>283</u>	<u>1060</u>	284	1050	128	262	1140	262	1140	<u>262</u>	<u>1140</u>
519.lbm_r	128	<u>293</u>	<u>460</u>	293	460	293	460	128	<u>293</u>	<u>460</u>	293	460	293	460
521.wrf_r	128	<u>400</u>	<u>716</u>	401	715	400	717	64	<u>194</u>	<u>738</u>	194	739	194	737
526.blender_r	128	213	915	213	913	<u>213</u>	<u>915</u>	128	213	915	213	913	<u>213</u>	<u>915</u>
527.cam4_r	128	<u>215</u>	<u>1040</u>	213	1050	215	1040	128	215	1040	213	1050	<u>215</u>	<u>1040</u>
538.imagick_r	128	<u>88.2</u>	<u>3610</u>	88.4	3600	88.0	3620	128	<u>88.2</u>	<u>3610</u>	88.4	3600	88.0	3620
544.nab_r	128	111	1930	<u>112</u>	<u>1930</u>	112	1930	128	111	1930	<u>112</u>	<u>1930</u>	112	1930
549.fotonik3d_r	128	798	625	792	630	<u>793</u>	<u>629</u>	128	798	625	792	630	<u>793</u>	<u>629</u>
554.roms_r	128	503	404	<u>504</u>	<u>403</u>	504	403	64	248	410	<u>248</u>	<u>409</u>	249	409

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Apr 18 09:37:05 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

-
1. uname -a
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w

09:37:05 up 8:44, 6 users, load average: 0.00, 0.00, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.17.1.96 00:53 8:40m 0.01s 0.01s -bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062726
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062726
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/fprate_sapphire.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo

model name : Intel(R) Xeon(R) 6732P
vendor_id : GenuineIntel
cpu family : 6
model : 173
stepping : 1
microcode : 0x1000380
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores : 32

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

siblings : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      128
On-line CPU(s) list:         0-127
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6732P
BIOS Model name:             Intel(R) Xeon(R) 6732P  CPU @ 3.8GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       173
Thread(s) per core:          2
Core(s) per socket:          32
Socket(s):                   2
Stepping:                    1
BogoMIPS:                    7600.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                             la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                             md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                             amx_tile amx_int8 flush_lid arch_capabilities
Virtualization:              VT-x
L1d cache:                   3 MiB (64 instances)
L1i cache:                   4 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    288 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):           0-31,64-95
NUMA node1 CPU(s):           32-63,96-127
Vulnerability Gather data sampling: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-31,64-95

node 0 size: 257722 MB

node 0 free: 226819 MB

node 1 cpus: 32-63,96-127

node 1 size: 257990 MB

node 1 free: 231143 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 528089412 kB

10. who -r

run-level 5 Apr 18 00:52

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysex systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=ad77ff4c-3b83-44e0-a924-423ebd972f45
splash=silent
resume=/dev/disk/by-uuid/f1b43a48-2334-43e8-bfc6-98384ea036ac
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 45:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

20. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1n1p3 xfs 2.0T 504G 1.5T 26% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: HPE ProLiant Compute DL360 Gen12
Product Family: ProLiant
Serial: D249RP0108
```

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Hynix HMC688AHBRA471N 32 GB 2 rank 6400
8x Hynix HMC688AHBRA472N 32 GB 2 rank 6400
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.10
```

Compiler Version Notes

```
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12
(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(3.80 GHz, Intel Xeon 6732P)

SPECrate®2017_fp_base = 993

SPECrate®2017_fp_peak = 1010

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-18 00:07:05-0400.

Report generated on 2025-07-14 14:33:35 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-14.