



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

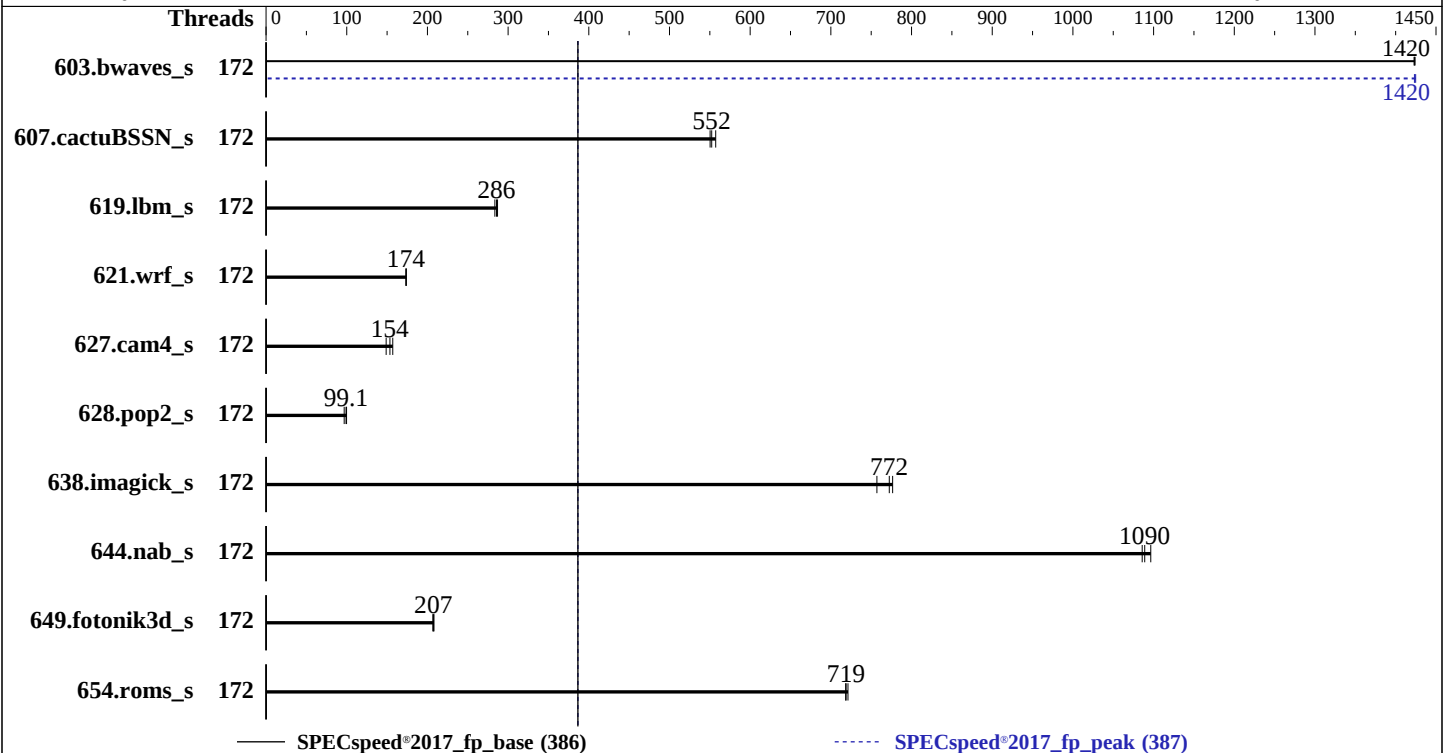

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1, 2 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.2 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
File System: btrfs
System State: Run level 5 (multi-user graphical)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	172	<u>41.5</u>	<u>1420</u>	41.4	1420	41.5	1420	<u>172</u>	<u>41.5</u>	<u>1420</u>	41.4	1420	<u>41.4</u>	<u>1420</u>
607.cactuBSSN_s	172	30.3	550	<u>30.2</u>	<u>552</u>	29.9	557	<u>172</u>	30.3	550	<u>30.2</u>	<u>552</u>	29.9	557
619.lbm_s	172	<u>18.3</u>	<u>286</u>	18.5	284	18.3	287	<u>172</u>	<u>18.3</u>	<u>286</u>	18.5	284	18.3	287
621.wrf_s	172	76.1	174	<u>76.2</u>	<u>174</u>	76.3	173	<u>172</u>	76.1	174	<u>76.2</u>	<u>174</u>	76.3	173
627.cam4_s	172	<u>57.7</u>	<u>154</u>	56.4	157	59.5	149	<u>172</u>	<u>57.7</u>	<u>154</u>	56.4	157	59.5	149
628.pop2_s	172	<u>120</u>	<u>99.1</u>	123	96.8	119	99.8	<u>172</u>	<u>120</u>	<u>99.1</u>	123	96.8	119	99.8
638.imagick_s	172	<u>18.7</u>	<u>772</u>	18.6	777	19.1	757	<u>172</u>	<u>18.7</u>	<u>772</u>	18.6	777	19.1	757
644.nab_s	172	16.1	1090	<u>16.0</u>	<u>1090</u>	15.9	1100	<u>172</u>	<u>16.1</u>	1090	<u>16.0</u>	<u>1090</u>	15.9	1100
649.fotonik3d_s	172	44.1	207	<u>43.9</u>	<u>207</u>	43.8	208	<u>172</u>	44.1	207	<u>43.9</u>	<u>207</u>	43.8	208
654.roms_s	172	21.9	718	<u>21.9</u>	<u>719</u>	21.8	721	<u>172</u>	21.9	718	<u>21.9</u>	<u>719</u>	21.8	721

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to balanced using "tuned-adm profile balanced"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

Collaborative Power Control set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu May 15 07:48:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
07:48:44 up 2:28, 4 users, load average: 113.56, 143.09, 148.63
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062083
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062083
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed_avx512_smt_on_tuned.sh
bash -c cd $SPEC/ && $SPEC/fpspeed_avx512_smt_on_tuned.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=172 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=172 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/temlogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6788P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 86
siblings       : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	344
On-line CPU(s) list:	0-343
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6788P
BIOS Model name:	Intel(R) Xeon(R) 6788P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	86
Socket(s):	2
Stepping:	1
CPU(s) scaling MHz:	23%
CPU max MHz:	3800.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	8.1 MiB (172 instances)
L1i cache:	10.8 MiB (172 instances)
L2 cache:	344 MiB (172 instances)
L3 cache:	672 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-85,172-257
NUMA node1 CPU(s):	86-171,258-343
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-85,172-257
node 0 size: 257627 MB
node 0 free: 253613 MB
node 1 cpus: 86-171,258-343
node 1 size: 257924 MB
node 1 free: 249573 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 527924532 kB

10. who -r

run-level 5 May 15 05:21

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@ pcscd saned@ systemd-userdbd wickedd
indirect	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=f6b0717c-45db-4fdb-bacc-150fc0536ac9
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 242:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 445G 251G 192G 57% /home

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute DL380 Gen12
Product Family: ProLiant
Serial: CNXD1M02CK

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -wl, -z, muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flt0 -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align_array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_fp_base = 386

SPECspeed®2017_fp_peak = 387

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-14 22:18:44-0400.
Report generated on 2025-07-14 14:33:12 by CPU2017 PDF formatter v6716.
Originally published on 2025-07-14.