



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

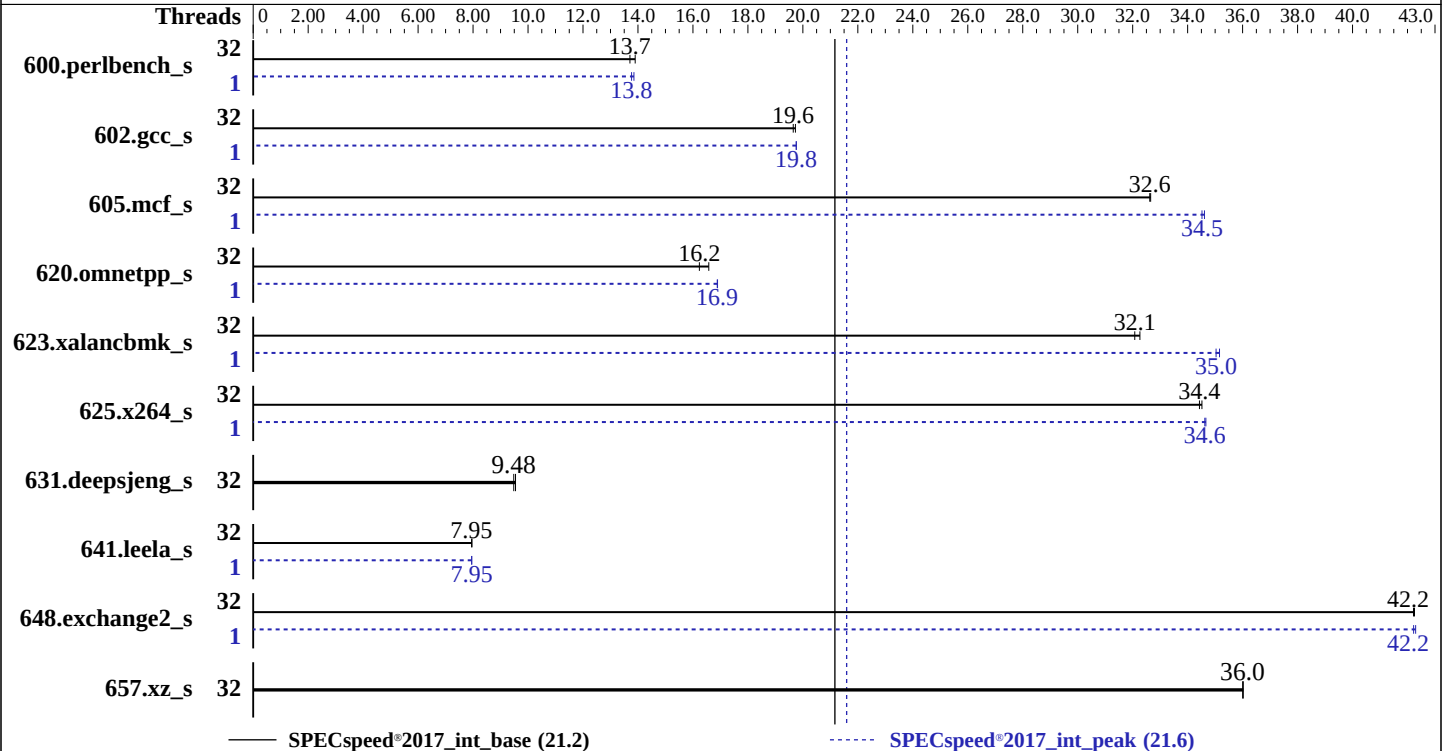

Hardware

CPU Name: AMD EPYC 9175F
Max MHz: 5000
Nominal: 4200
Enabled: 32 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 1 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 40 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
6.8.0-58-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 1.1.3 released Feb-2025
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<u>129</u>	<u>13.7</u>	128	13.9			1	<u>129</u>	<u>13.8</u>	128	13.9		
602.gcc_s	32	202	19.7	<u>203</u>	<u>19.6</u>			1	201	19.8	<u>202</u>	<u>19.8</u>		
605.mcf_s	32	<u>145</u>	<u>32.6</u>	145	32.7			1	136	34.6	<u>137</u>	<u>34.5</u>		
620.omnetpp_s	32	98.4	16.6	<u>100</u>	<u>16.2</u>			1	<u>96.6</u>	<u>16.9</u>	96.5	16.9		
623.xalancbmk_s	32	43.9	32.3	<u>44.2</u>	<u>32.1</u>			1	40.3	35.2	<u>40.4</u>	<u>35.0</u>		
625.x264_s	32	<u>51.2</u>	<u>34.4</u>	51.1	34.5			1	<u>50.9</u>	<u>34.6</u>	50.9	34.7		
631.deepsjeng_s	32	<u>151</u>	<u>9.48</u>	150	9.54			32	<u>151</u>	<u>9.48</u>	150	9.54		
641.leela_s	32	<u>215</u>	<u>7.95</u>	214	7.96			1	215	7.95	<u>215</u>	<u>7.95</u>		
648.exchange2_s	32	69.6	42.3	<u>69.6</u>	<u>42.2</u>			1	<u>69.6</u>	<u>42.2</u>	69.5	42.3		
657.xz_s	32	<u>172</u>	<u>36.0</u>	172	36.0			32	<u>172</u>	<u>36.0</u>	172	36.0		

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "15"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

Optimizer Mode : Enabled
Algorithm Performance Boost Disable : Enabled
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R7725 Tue Jun 3 17:26:19 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux 1234567-R7725 6.8.0-58-generic #60-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 14 18:29:48 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux

2. w
17:26:19 up 5 min, 1 user, load average: 0.39, 0.11, 0.03
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 17:24 48.00s 1.03s 0.30s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
data(kbytes)      unlimited
stack(kbytes)     unlimited
coredump(blocks)  0
memory(kbytes)    unlimited
locked memory(kbytes) 2097152
process           3092888
nofiles           1024
vmemory(kbytes)   unlimited
locks             unlimited
rtprio            0
```

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.3_T6 --output_format
html, pdf, txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.3_T6 --output_format html, pdf, txt intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.3_T6 --output_format html, pdf, txt --nopower --runmode speed --tune base:peak --size
test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9175F 16-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 16
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0:  core ids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 1:  core ids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 0:  apicids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 1:  apicids 256,272,288,304,320,336,352,368,384,400,416,432,448,464,480,496
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	AMD
Model name:	AMD EPYC 9175F 16-Core Processor
BIOS Model name:	AMD EPYC 9175F 16-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	1
Core(s) per socket:	16
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	43%
CPU max MHz:	5003.9058
CPU min MHz:	1500.0000
BogoMIPS:	8388.44
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca avx512_vp2intersect flush_lld debug_swap
L1d cache:	1.5 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	32 MiB (32 instances)
L3 cache:	1 GiB (32 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-3
NUMA node1 CPU(s):	4-7
NUMA node2 CPU(s):	8-11
NUMA node3 CPU(s):	12-15
NUMA node4 CPU(s):	16-19
NUMA node5 CPU(s):	20-23
NUMA node6 CPU(s):	24-27
NUMA node7 CPU(s):	28-31
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-3

node 0 size: 96048 MB

node 0 free: 95900 MB

node 1 cpus: 4-7

node 1 size: 96762 MB

node 1 free: 96412 MB

node 2 cpus: 8-11

node 2 size: 96719 MB

node 2 free: 92930 MB

node 3 cpus: 12-15

node 3 size: 96746 MB

node 3 free: 96641 MB

node 4 cpus: 16-19

node 4 size: 96762 MB

node 4 free: 96121 MB

node 5 cpus: 20-23

node 5 size: 96762 MB

node 5 free: 96529 MB

node 6 cpus: 24-27

node 6 size: 96762 MB

node 6 free: 96639 MB

node 7 cpus: 28-31

node 7 size: 96733 MB

node 7 free: 96615 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

9. /proc/meminfo

MemTotal: 791855640 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

run-level 5 Jun 3 17:23

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)

Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* systemd-networkd-wait-online.service	loaded	failed	failed	Wait for Network to be Configured

Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.

1 loaded units listed.

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysexit systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uuuid
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0-58-generic
root=UUID=c330b932-4a2a-48ee-a22b-539a12ed1698
ro

15. cpupower frequency-info

analyzing CPU 24:
current policy: frequency should be within 1.50 GHz and 4.20 GHz.
The governor "schedutil" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 4200MHz

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS
```

```
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs  40G   3.3G   37G   9% /mnt/ramdisk
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge R7725
Product Family: PowerEdge
Serial:         1234567
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x 802C0000802C MTC20F2085S1RC64BD2 32 GB 2 rank 6400
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.3
BIOS Date: 02/25/2025
BIOS Revision: 1.1

Compiler Version Notes

=====

C	600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
	657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====

C++	620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
	641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====

Fortran	648.exchange2_s(base, peak)
---------	-----------------------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

SPECspeed®2017_int_peak = 21.6

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 21.2

PowerEdge R7725 (AMD EPYC 9175F 16-Core Processor)

SPECspeed®2017_int_peak = 21.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

641.leela_s (continued):
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -fltto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-03 13:26:19-0400.
Report generated on 2025-07-01 19:10:15 by CPU2017 PDF formatter v6716.
Originally published on 2025-07-01.