



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

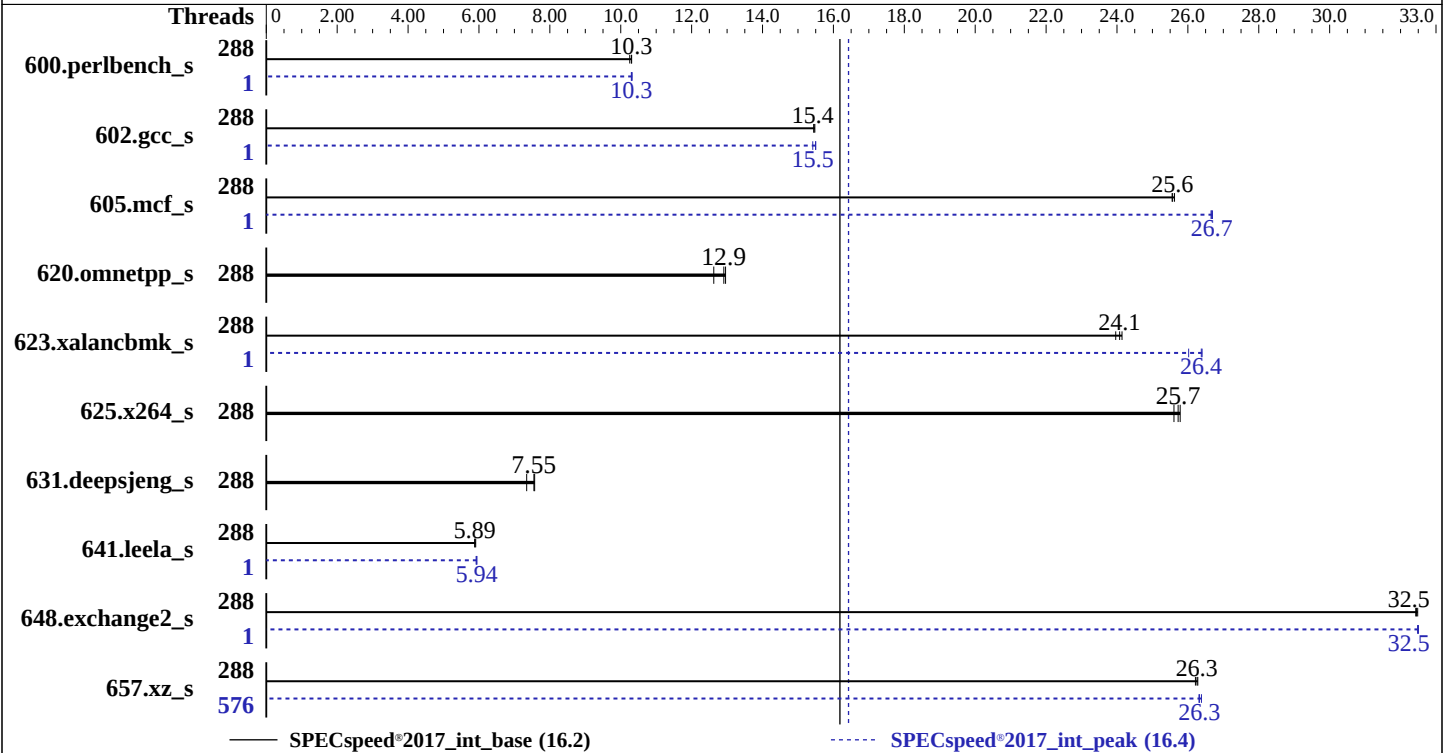

Hardware

CPU Name: AMD EPYC 9825
Max MHz: 3700
Nominal: 2200
Enabled: 288 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 12 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.84 TB NVME SSD
Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Lenovo BIOS Version QGE139H 8.21 released May-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	288	<u>172</u>	<u>10.3</u>	173	10.3	172	10.3	<u>1</u>	<u>172</u>	<u>10.3</u>	172	10.3	172	10.3
602.gcc_s	288	258	15.4	257	15.5	<u>258</u>	<u>15.4</u>	<u>1</u>	258	15.4	257	15.5	<u>257</u>	<u>15.5</u>
605.mcf_s	288	185	25.6	<u>185</u>	<u>25.6</u>	184	25.6	<u>1</u>	177	26.7	<u>177</u>	<u>26.7</u>	177	26.7
620.omnetpp_s	288	<u>126</u>	<u>12.9</u>	129	12.6	126	13.0	<u>288</u>	<u>126</u>	<u>12.9</u>	129	12.6	126	13.0
623.xalancbmk_s	288	59.1	24.0	<u>58.9</u>	<u>24.1</u>	58.7	24.1	<u>1</u>	54.5	26.0	<u>53.7</u>	<u>26.4</u>	53.7	26.4
625.x264_s	288	68.9	25.6	68.4	25.8	<u>68.6</u>	<u>25.7</u>	<u>288</u>	68.9	25.6	68.4	25.8	<u>68.6</u>	<u>25.7</u>
631.deepsjeng_s	288	189	7.57	<u>190</u>	<u>7.55</u>	195	7.35	<u>288</u>	189	7.57	<u>190</u>	<u>7.55</u>	195	7.35
641.leela_s	288	290	5.88	289	5.91	<u>290</u>	<u>5.89</u>	<u>1</u>	288	5.92	287	5.94	<u>287</u>	<u>5.94</u>
648.exchange2_s	288	<u>90.6</u>	<u>32.5</u>	90.7	32.4	90.5	32.5	<u>1</u>	90.5	32.5	<u>90.5</u>	<u>32.5</u>	90.4	32.5
657.xz_s	288	235	26.3	236	26.2	<u>235</u>	<u>26.3</u>	<u>576</u>	235	26.3	<u>235</u>	<u>26.3</u>	234	26.4

SPECspeed®2017_int_base = **16.2**

SPECspeed®2017_int_peak = **16.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-575"

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "576"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-575"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jun 6 03:23:38 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
03:23:38 up 3:05, 1 user, load average: 1.40, 3.27, 2.41
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3092270
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3092270
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.497/temlogs/preenv.intspeerd.497.0.log --lognum 497.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
-----
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb101047
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 144
siblings        : 288
2 physical ids (chips)
576 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids
0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247,256-279,288-311,320-343,352-375
physical id 1: apicids
512-535,544-567,576-599,608-631,640-663,672-695,704-727,736-759,768-791,800-823,832-855,864-887
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64	
CPU op-mode(s):	32-bit, 64-bit	
Address sizes:	52 bits physical, 57 bits virtual	
Byte Order:	Little Endian	
CPU(s):	576	
On-line CPU(s) list:	0-575	
Vendor ID:	AuthenticAMD	
BIOS Vendor ID:	Advanced Micro Devices, Inc.	
Model name:	AMD EPYC 9825 144-Core Processor	
BIOS Model name:	AMD EPYC 9825 144-Core Processor	Unknown CPU @ 2.2GHz
BIOS CPU family:	107	
CPU family:	26	
Model:	17	
Thread(s) per core:	2	
Core(s) per socket:	144	

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Socket(s): 2
Stepping: 0
Frequency boost: enabled
CPU(s) scaling MHz: 101%
CPU max MHz: 2200.0000
CPU min MHz: 1500.0000
BogoMIPS: 4400.13
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap
AMD-V
13.5 MiB (288 instances)
9 MiB (288 instances)
288 MiB (288 instances)
768 MiB (24 instances)
8
0-35,288-323
36-71,324-359
72-107,360-395
108-143,396-431
144-179,432-467
180-215,468-503
216-251,504-539
252-287,540-575
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	13.5M	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

L1i	32K	9M	8 Instruction	1	64	1	64
L2	1M	288M	16 Unified	2	1024	1	64
L3	32M	768M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-35,288-323
node 0 size: 96095 MB
node 0 free: 95413 MB
node 1 cpus: 36-71,324-359
node 1 size: 96749 MB
node 1 free: 96416 MB
node 2 cpus: 72-107,360-395
node 2 size: 96749 MB
node 2 free: 96404 MB
node 3 cpus: 108-143,396-431
node 3 size: 96749 MB
node 3 free: 95726 MB
node 4 cpus: 144-179,432-467
node 4 size: 96749 MB
node 4 free: 96510 MB
node 5 cpus: 180-215,468-503
node 5 size: 96749 MB
node 5 free: 96500 MB
node 6 cpus: 216-251,504-539
node 6 size: 96749 MB
node 6 free: 96512 MB
node 7 cpus: 252-287,540-575
node 7 size: 96503 MB
node 7 free: 96276 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 791648196 kB

10. who -r

run-level 3 Jun 6 00:19

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

enabled-runtime kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix
disabled purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
systemd-remount-fs
autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9444ad63-6600-41de-9db7-026811eaf134
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 316:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none             511
max_ptes_shared           256
max_ptes_swap             64
pages_to_scan             4096
scan_sleep_millisecs     10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   3.5T   98G  3.4T   3% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SD665 V3
Product Family: ThinkSystem
Serial:          1234567890
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 12x SK Hynix HMC88AHBRA471N 32 GB 2 rank 6400
  2x SK Hynix HMC88AHBRA472N 32 GB 2 rank 6400
 10x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     QGE139H-8.21
BIOS Date:        05/14/2025
BIOS Revision:    8.21
Firmware Revision: 13.10
-----
```

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====  
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
          | 641.leela_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran  | 648.exchange2_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3  
-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp -DSPEC_OPENMP  
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm  
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIB -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIB  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.20 GHz, AMD EPYC 9825)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-05 15:23:38-0400.

Report generated on 2025-07-01 19:11:24 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.