



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

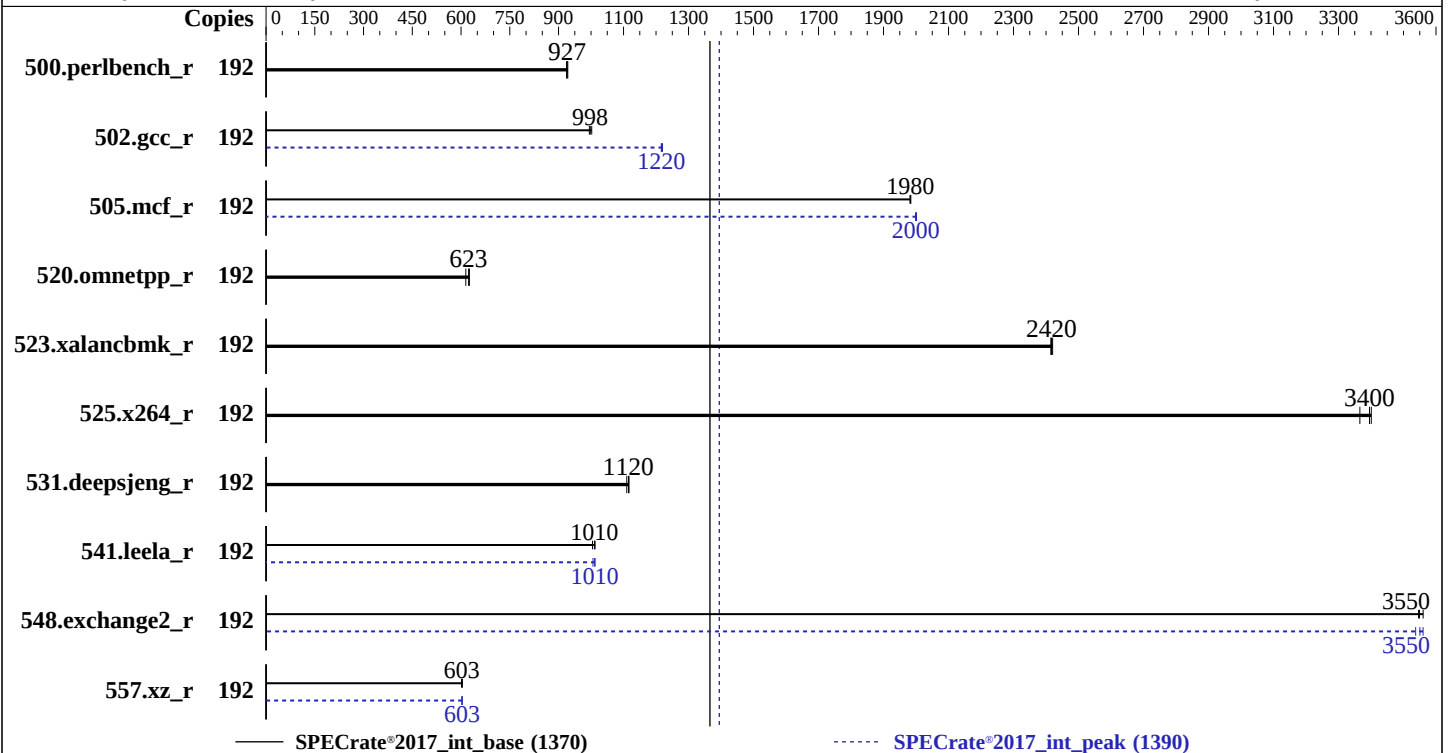

Hardware

CPU Name: AMD EPYC 9475F
Max MHz: 4800
Nominal: 3650
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 4.3.5c released Dec-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	330	927	329	928	331	925	192	330	927	329	928	331	925
502.gcc_r	192	273	995	271	1000	272	998	192	224	1220	223	1220	223	1220
505.mcf_r	192	156	1980	156	1980	157	1980	192	155	2000	155	2000	155	2000
520.omnetpp_r	192	410	615	403	626	404	623	192	410	615	403	626	404	623
523.xalancbmk_r	192	83.8	2420	84.0	2410	83.9	2420	192	83.8	2420	84.0	2410	83.9	2420
525.x264_r	192	99.0	3400	98.9	3400	99.9	3370	192	99.0	3400	98.9	3400	99.9	3370
531.deepsjeng_r	192	198	1110	197	1120	197	1120	192	198	1110	197	1120	197	1120
541.leela_r	192	317	1000	314	1010	315	1010	192	316	1010	314	1010	314	1010
548.exchange2_r	192	142	3550	141	3560	142	3550	192	142	3540	141	3560	142	3550
557.xz_r	192	343	604	345	601	344	603	192	344	603	344	603	344	603

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jun 13 05:42:01 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:42:01 up 6:41, 3 users, load average: 0.07, 0.02, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -              23:07    22.00s 0.90s  0.14s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190622
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 6190622
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=43
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b intrate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --noprerev --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9475F 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

TLB size : 192 4K pages
cpu cores : 48
siblings : 96

2 physical ids (chips)

192 processors (hardware threads)

physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61

physical id 1: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61

physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123

physical id 1: apicids 128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9475F 48-Core Processor
BIOS Model name:       AMD EPYC 9475F 48-Core Processor
BIOS CPU family:       107
CPU family:            26
Model:                 2
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    76%
CPU max MHz:           4819.1401
CPU min MHz:           1500.0000
BogoMIPS:              7288.71
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                    avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                    movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                    flush_l1d debug_swap
Virtualization:        AMD-V
L1d cache:             4.5 MiB (96 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-11,96-107
NUMA node1 CPU(s): 12-23,108-119
NUMA node2 CPU(s): 24-35,120-131
NUMA node3 CPU(s): 36-47,132-143
NUMA node4 CPU(s): 48-59,144-155
NUMA node5 CPU(s): 60-71,156-167
NUMA node6 CPU(s): 72-83,168-179
NUMA node7 CPU(s): 84-95,180-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 193074 MB
node 0 free: 191939 MB
node 1 cpus: 12-23,108-119
node 1 size: 193529 MB
node 1 free: 192710 MB
node 2 cpus: 24-35,120-131
node 2 size: 193529 MB
node 2 free: 192687 MB
node 3 cpus: 36-47,132-143
node 3 size: 193529 MB
node 3 free: 192641 MB
node 4 cpus: 48-59,144-155
node 4 size: 193529 MB
node 4 free: 192666 MB
node 5 cpus: 60-71,156-167
node 5 size: 193529 MB
node 5 free: 192713 MB
node 6 cpus: 72-83,168-179
node 6 size: 193529 MB
node 6 free: 192733 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 7 cpus: 84-95,180-191
node 7 size: 193430 MB
node 7 free: 192559 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

```
9. /proc/meminfo
MemTotal:      1584826464 kB
```

```
10. who -r
run-level 3 Jun 12 23:05
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target    Status
multi-user        running
```

```
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
           issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
           smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
           wickedd-nanny
enabled-runtime systemd-remount-fs
disabled    autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
           chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
           firewallld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvq_daemon hv_vss_daemon
           hwloc-dump-hwdata ipmi ipmiev d iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
           kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
           nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
           snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
           systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
           systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
           virtnetworkd virtnodedevd virtnwfilterd virtsecret d virtstoraged
indirect    pcsd systemd-userdbd tftpd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=c83597cb-e37b-43a6-bd1c-58cd7f1f9316
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 114:
current policy: frequency should be within 1.50 GHz and 3.65 GHz.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

```
-----
15. sysctl
   kernel.numa_balancing      1
   kernel.randomize_va_space  0
   vm.compaction_proactiveness 20
   vm.dirty_background_bytes   0
   vm.dirty_background_ratio   10
   vm.dirty_bytes              0
   vm.dirty_expire_centisecs    3000
   vm.dirty_ratio               8
   vm.dirty_writeback_centisecs 500
   vm.dirtytime_expire_seconds 43200
   vm.extfrag_threshold         500
   vm.min_unmapped_ratio        1
   vm.nr_hugepages              0
   vm.nr_hugepages_mempolicy    0
   vm.nr_overcommit_hugepages   0
   vm.swappiness                1
   vm.watermark_boost_factor    15000
   vm.watermark_scale_factor    10
   vm.zone_reclaim_mode         1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
   defrag      [always] defer defer+madvise madvise never
   enabled     [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem      Type      Size      Used Avail Use% Mounted on
  /dev/sda2       btrfs    224G      9.5G   210G   5% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
   Vendor:      Cisco Systems Inc
   Product:     UCSC-C245-M8SX
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Product Family: Cisco UCS Rack Server
Serial: WZP2750Z0CS

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000
1x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
1x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C245M8.4.3.5c.0.1202241033
BIOS Date: 12/02/2024
BIOS Revision: 5.35

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=2000000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9475F
3.65 GHz Processor)

SPECrate®2017_int_base = 1370

SPECrate®2017_int_peak = 1390

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-13 05:42:01-0400.

Report generated on 2025-07-01 19:12:02 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.