



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

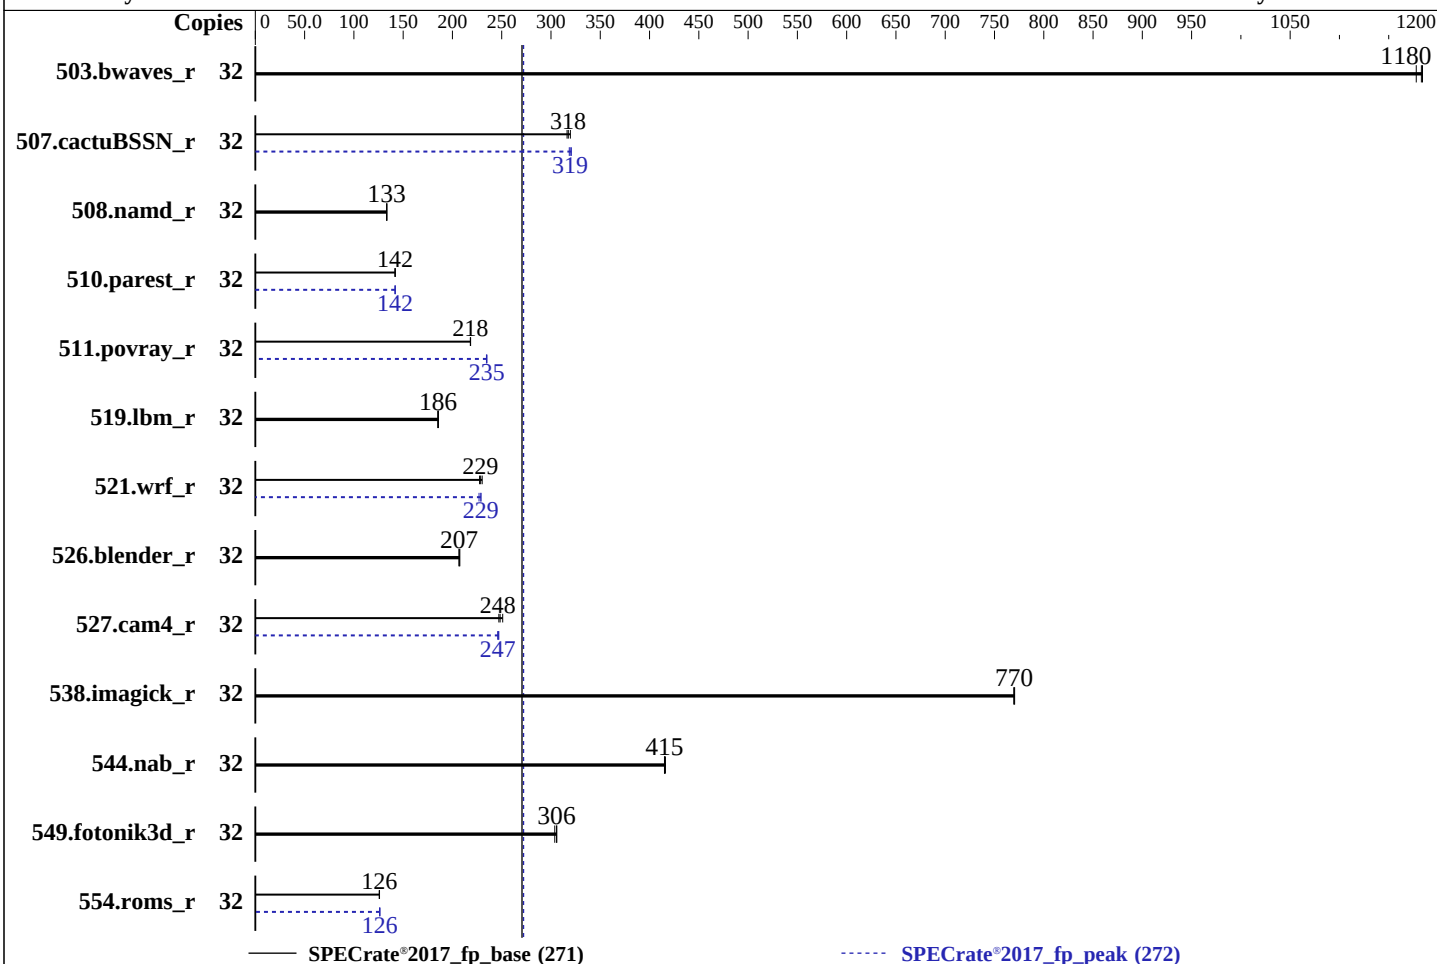

Hardware

CPU Name: Intel Xeon Silver 4509Y
Max MHz: 4100
Nominal: 2600
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 22.5 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
5.14.0-284.11.1.el9_2.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 01.01.06.16 Released May-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<u>271</u>	<u>1180</u>	271	1180	272	1180	32	<u>271</u>	<u>1180</u>	271	1180	272	1180
507.cactuBSSN_r	32	<u>128</u>	<u>318</u>	127	320	128	316	32	126	321	<u>127</u>	<u>319</u>	127	319
508.namd_r	32	<u>228</u>	<u>133</u>	228	133	228	133	32	<u>228</u>	<u>133</u>	228	133	228	133
510.parest_r	32	<u>590</u>	<u>142</u>	591	142	590	142	32	<u>590</u>	<u>142</u>	590	142	590	142
511.povray_r	32	342	218	<u>342</u>	<u>218</u>	342	218	32	318	235	319	235	<u>318</u>	<u>235</u>
519.lbm_r	32	<u>182</u>	<u>186</u>	182	186	182	185	32	<u>182</u>	<u>186</u>	182	186	182	185
521.wrf_r	32	315	228	<u>314</u>	<u>229</u>	311	230	32	316	227	<u>313</u>	<u>229</u>	313	229
526.blender_r	32	<u>236</u>	<u>207</u>	236	207	235	208	32	<u>236</u>	<u>207</u>	236	207	235	208
527.cam4_r	32	227	247	<u>225</u>	<u>248</u>	223	251	32	227	247	<u>227</u>	<u>247</u>	228	246
538.imagick_r	32	103	770	<u>103</u>	<u>770</u>	103	770	32	103	770	<u>103</u>	<u>770</u>	103	770
544.nab_r	32	<u>130</u>	<u>415</u>	129	416	130	415	32	<u>130</u>	<u>415</u>	129	416	130	415
549.fotonik3d_r	32	410	304	408	306	<u>408</u>	<u>306</u>	32	410	304	408	306	<u>408</u>	<u>306</u>
554.roms_r	32	404	126	404	126	<u>404</u>	<u>126</u>	32	403	126	<u>403</u>	<u>126</u>	402	126

SPECrate®2017_fp_base = 271

SPECrate®2017_fp_peak = 272

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017/lib/intel64:/home/spec2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/spec2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Wed Jun 25 05:14:30 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:14:30 up 4:57, 2 users, load average: 21.44, 29.21, 30.83
USER  TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1      00:24   4:50m  1.11s  0.06s  -bash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

root pts/0 00:22 4:50m 0.04s 0.04s -bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2060248
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2060248
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 32 -c ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define
smt-on --define cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 32 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.013/templots/preenv.fprate.013.0.log --lognum 013.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4509Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000603
bugs             : spectre_v1 spectre_v2 spec_store_bypass swaps eibrs_pbrsb
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0:  core ids 0-7
physical id 1:  core ids 0-7
physical id 0:  apicids 0-15
physical id 1:  apicids 64-79
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2025
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:    0-31
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             INTEL(R) XEON(R) SILVER 4509Y
BIOS Model name:        INTEL(R) XEON(R) SILVER 4509Y
CPU family:             6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     8
Socket(s):              2
Stepping:               8
BogoMIPS:               5200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip
                        pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                        avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                        movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                        ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              768 KiB (16 instances)
L1i cache:              512 KiB (16 instances)
L2 cache:               32 MiB (16 instances)
L3 cache:               45 MiB (2 instances)
NUMA node(s):           4
NUMA node0 CPU(s):      0-3,16-19
NUMA node1 CPU(s):      4-7,20-23
NUMA node2 CPU(s):      8-11,24-27
NUMA node3 CPU(s):      12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

Vulnerability Srbds: sequence
Vulnerability Tsx async abort: Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 128040 MB
node 0 free: 120465 MB
node 1 cpus: 4-7,20-23
node 1 size: 129022 MB
node 1 free: 124854 MB
node 2 cpus: 8-11,24-27
node 2 size: 129022 MB
node 2 free: 124903 MB
node 3 cpus: 12-15,28-31
node 3 size: 129017 MB
node 3 free: 124903 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 527464592 kB

10. who -r

run-level 3 Jun 25 00:17

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables nvme-autoconnect pesign
rdisc rhcd rhsm rhsm-facts rpmbd-rebuild selinux-check-proper-disable serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

20. OS release

```
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)
```

21. Disk information

SPEC is set to: /home/spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	69G	750G	9%	/home

22. /sys/devices/virtual/dmi/id

```
Vendor: XFUSION
Product: 1288H V7
Product Family: Eagle Stream
```

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
14x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400
2x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800, configured at 4400
```

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: XFUSION
BIOS Version: 01.01.06.16
BIOS Date: 05/08/2025
BIOS Revision: 6.16
```

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:

`-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:

`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -WL,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -WL,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -WL,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -WL,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 271

FusionServer 1288H V7 (Intel Xeon Silver 4509Y)

SPECrate®2017_fp_peak = 272

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2025

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-25 05:14:29-0400.

Report generated on 2025-07-16 11:04:44 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-15.