



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

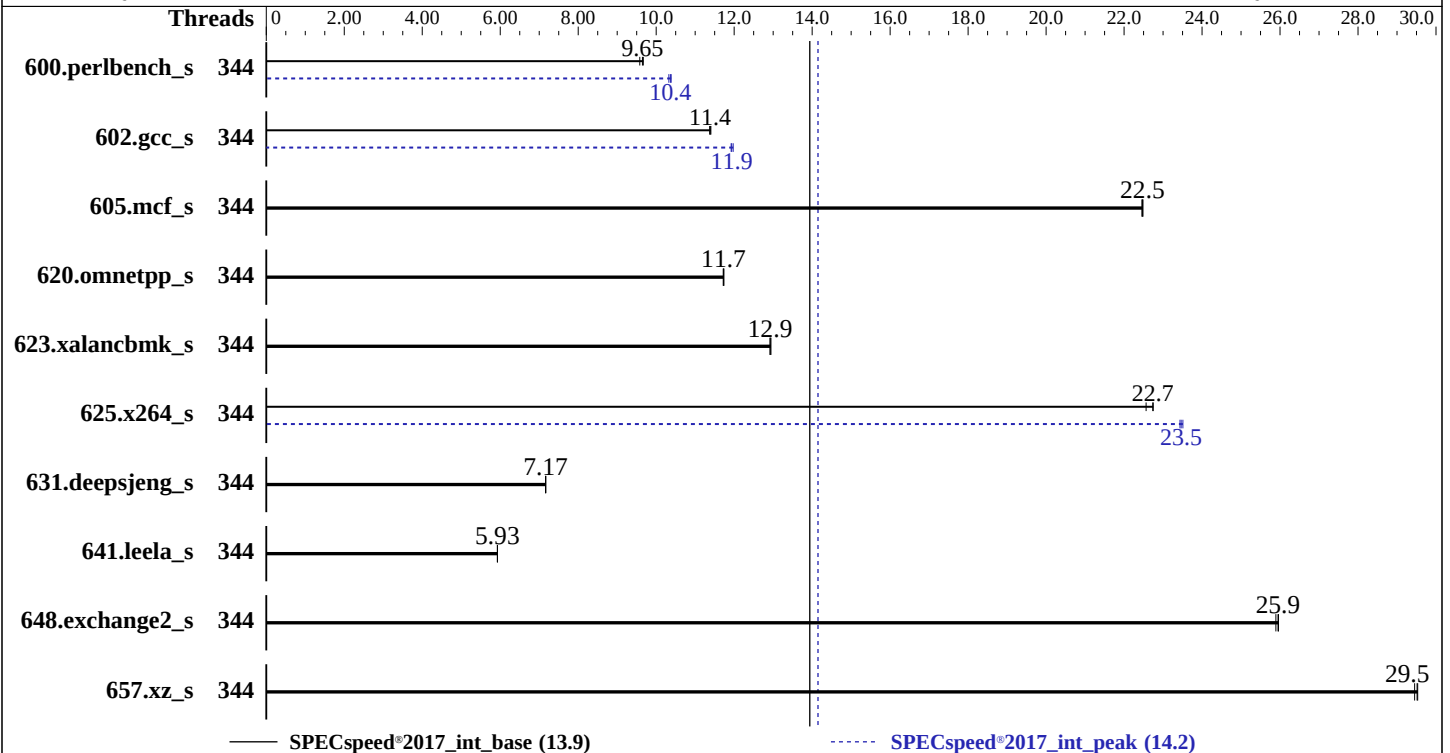

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 344 cores, 4 chips
Orderable: 1,2,4 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.2 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.34 04/18/2025 released Apr-2025
File System: btrfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	344	184	9.65	184	9.67	185	9.58	344	171	10.4	171	10.4	172	10.3
602.gcc_s	344	350	11.4	349	11.4	350	11.4	344	333	12.0	334	11.9	334	11.9
605.mcf_s	344	210	22.5	210	22.5	210	22.5	344	210	22.5	210	22.5	210	22.5
620.omnetpp_s	344	139	11.7	139	11.7	139	11.7	344	139	11.7	139	11.7	139	11.7
623.xalancbmk_s	344	110	12.9	110	12.9	109	12.9	344	110	12.9	110	12.9	109	12.9
625.x264_s	344	77.5	22.7	77.6	22.7	78.2	22.6	344	75.0	23.5	75.3	23.4	75.2	23.5
631.deepsjeng_s	344	200	7.16	200	7.17	200	7.17	344	200	7.16	200	7.17	200	7.17
641.leela_s	344	288	5.93	288	5.93	288	5.93	344	288	5.93	288	5.93	288	5.93
648.exchange2_s	344	113	25.9	113	26.0	114	25.9	344	113	25.9	113	26.0	114	25.9
657.xz_s	344	209	29.5	209	29.5	210	29.5	344	209	29.5	209	29.5	210	29.5

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Intel UPI Prefetch set to Disabled
Intel Hyper-Threading set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jun 19 04:53:19 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:53:19 up 2 min,  4 users,  load average: 0.30, 0.19, 0.07
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 8254690
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 8254690
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intspeed_spr_off.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=344 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=344 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeak
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6788P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003a5
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 86
4 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 2:  core ids 0-42,64-106
physical id 3:  core ids 0-42,64-106
physical id 0:  apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
physical id 1:  apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,40
2,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

, 456, 458, 460, 462, 464, 466, 468

physical id 2: apicids

512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 5

64, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 640, 642, 644, 646, 648, 650, 652, 654, 656, 65

8, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710

, 712, 714, 716, 718, 720, 722, 724

physical id 3: apicids

768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 8

20, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 896, 898, 900, 902, 904, 906, 908, 910, 912, 91

4, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966

, 968, 970, 972, 974, 976, 978, 980

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 344
On-line CPU(s) list:    0-343
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             Intel(R) Xeon(R) 6788P
BIOS Model name:        Intel(R) Xeon(R) 6788P   CPU @ 2.0GHz
BIOS CPU family:        179
CPU family:             6
Model:                  173
Thread(s) per core:     1
Core(s) per socket:     86
Socket(s):              4
Stepping:               1
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                        vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                        rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                        vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              16.1 MiB (344 instances)
L1i cache:              21.5 MiB (344 instances)
L2 cache:               688 MiB (344 instances)
L3 cache:               1.3 GiB (4 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

NUMA node(s): 8
NUMA node0 CPU(s): 0-42
NUMA node1 CPU(s): 43-85
NUMA node2 CPU(s): 86-128
NUMA node3 CPU(s): 129-171
NUMA node4 CPU(s): 172-214
NUMA node5 CPU(s): 215-257
NUMA node6 CPU(s): 258-300
NUMA node7 CPU(s): 301-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-42
node 0 size: 257567 MB
node 0 free: 256811 MB
node 1 cpus: 43-85
node 1 size: 258036 MB
node 1 free: 257328 MB
node 2 cpus: 86-128
node 2 size: 258036 MB
node 2 free: 257353 MB
node 3 cpus: 129-171
node 3 size: 258036 MB
node 3 free: 257169 MB
node 4 cpus: 172-214
node 4 size: 257998 MB
node 4 free: 257199 MB
node 5 cpus: 215-257
node 5 size: 258036 MB
node 5 free: 257252 MB
node 6 cpus: 258-300
node 6 size: 258036 MB
node 6 free: 257130 MB
node 7 cpus: 301-343
node 7 size: 257955 MB
node 7 free: 256733 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	21	21	21	21	21	21
1:	12	10	21	21	21	21	21	21
2:	21	21	10	12	21	21	21	21
3:	21	21	12	10	21	21	21	21
4:	21	21	21	21	10	12	21	21
5:	21	21	21	21	12	10	21	21
6:	21	21	21	21	21	21	10	12
7:	21	21	21	21	21	21	12	10

9. /proc/meminfo

MemTotal: 2113232152 kB

10. who -r

run-level 5 Jun 19 04:52

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievad issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=5667ef14-6c0b-4ce8-916f-276c467fba18
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 325:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: virtual-host

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	btrfs	1.5T	361G	1.2T	25%	/home

21. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	HPE ProLiant Compute DL580 Gen12

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Product Family: ProLiant
Serial: 7CED2FP020

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMC94AHBRA480N 64 GB 2 rank 6400
8x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.34
BIOS Date: 04/18/2025
BIOS Revision: 1.34
Firmware Revision: 1.13

Compiler Version Notes

```
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
Fortran | 648.exchange2_s(base, peak)
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -w -std=c11 -m64 -Wl, -z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-18 19:23:19-0400.

Report generated on 2025-07-16 11:04:54 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-15.