



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

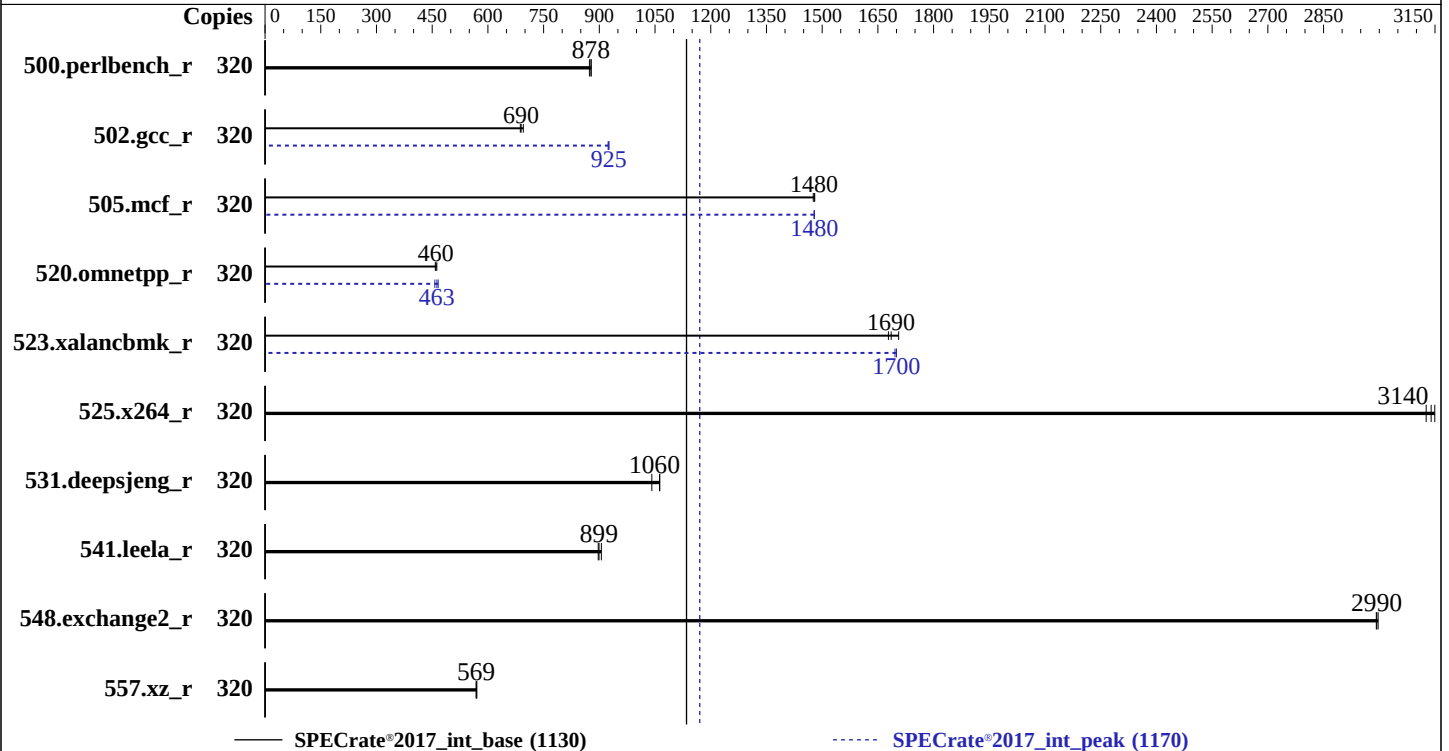

Hardware

CPU Name: AMD EPYC 9845
Max MHz: 3700
Nominal: 2100
Enabled: 160 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 3 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	320	581	878	580	878	583	873	320	581	878	580	878	583	873
502.gcc_r	320	657	690	659	687	652	695	320	491	924	490	925	489	926
505.mcf_r	320	350	1480	349	1480	350	1480	320	350	1480	350	1480	350	1480
520.omnetpp_r	320	913	460	916	458	908	462	320	907	463	901	466	918	457
523.xalancbmk_r	320	200	1690	201	1680	198	1710	320	199	1700	199	1700	199	1700
525.x264_r	320	178	3140	179	3130	178	3150	320	178	3140	179	3130	178	3150
531.deepsjeng_r	320	352	1040	345	1060	345	1060	320	352	1040	345	1060	345	1060
541.leela_r	320	591	897	589	899	585	905	320	591	897	589	899	585	905
548.exchange2_r	320	280	2990	280	2990	280	3000	320	280	2990	280	2990	280	3000
557.xz_r	320	608	569	608	569	606	570	320	608	569	608	569	606	570

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to High Performance Compute (HPC)

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

AMD Periodic Directory Rinse set to Periodic

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Sep 18 00:05:05 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:05:05 up 2 min, 3 users, load average: 3.96, 3.68, 1.54
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      pts/1    10.79.30.182: 00:04      17.00s     0.94s   0.04s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093878
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093878
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.047/temlogs/preenv.intrate.047.0.log --lognum 047.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9845 160-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb10104e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 160
siblings        : 320
1 physical ids (chips)
320 processors (hardware threads)
physical id 0:  core ids 0-159
physical id 0:  apicids 0-319
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            320
On-line CPU(s) list: 0-319
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 9845 160-Core Processor
CPU family:        26
Model:             17
Thread(s) per core: 2
Core(s) per socket: 160
Socket(s):         1
Stepping:          0
Frequency boost:    enabled
CPU(s) scaling MHz: 101%
CPU max MHz:       2100.0000
CPU min MHz:       1500.0000
BogoMIPS:          4200.16
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                   pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                   rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                   extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                   cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                   osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                   ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                   cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                   xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                   nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

NUMA node8 CPU(s):

NUMA node9 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

AMD-V

7.5 MiB (160 instances)

5 MiB (160 instances)

160 MiB (160 instances)

320 MiB (10 instances)

10

0-15,160-175

16-31,176-191

32-47,192-207

48-63,208-223

64-79,224-239

80-95,240-255

96-111,256-271

112-127,272-287

128-143,288-303

144-159,304-319

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	1M	160M	16	Unified	2	1024	1	64
L3	32M	320M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 10 nodes (0-9)

node 0 cpus: 0-15,160-175

node 0 size: 77026 MB

node 0 free: 69940 MB

node 1 cpus: 16-31,176-191

node 1 size: 77405 MB

node 1 free: 76998 MB

node 2 cpus: 32-47,192-207

node 2 size: 77403 MB

node 2 free: 77049 MB

node 3 cpus: 48-63,208-223

node 3 size: 77407 MB

node 3 free: 77004 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 4 cpus: 64-79,224-239
node 4 size: 77407 MB
node 4 free: 77080 MB
node 5 cpus: 80-95,240-255
node 5 size: 77407 MB
node 5 free: 77051 MB
node 6 cpus: 96-111,256-271
node 6 size: 77407 MB
node 6 free: 77089 MB
node 7 cpus: 112-127,272-287
node 7 size: 77405 MB
node 7 free: 72834 MB
node 8 cpus: 128-143,288-303
node 8 size: 77367 MB
node 8 free: 76971 MB
node 9 cpus: 144-159,304-319
node 9 size: 77262 MB
node 9 free: 76649 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9
0: 10 11 11 11 11 12 12 12 12 12
1: 11 10 11 11 11 12 12 12 12 12
2: 11 11 10 11 11 12 12 12 12 12
3: 11 11 11 10 11 12 12 12 12 12
4: 11 11 11 11 10 12 12 12 12 12
5: 12 12 12 12 12 10 11 11 11 11
6: 12 12 12 12 12 11 10 11 11 11
7: 12 12 12 12 12 11 11 10 11 11
8: 12 12 12 12 12 11 11 11 10 11
9: 12 12 12 12 12 11 11 11 11 10
```

```
-----
9. /proc/meminfo
   MemTotal:      792064292 kB
```

```
-----
10. who -r
    run-level 5 Sep 18 00:03
```

```
-----
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
    Default Target   Status
    graphical        running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog
lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect oracle postfix purge-kernels
rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemud virtxend
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
clamav-milter clamd clamonnacc console-getty corosync corosync-notifyd crm_mon ctdb cups
cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewallld
fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
raccoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd
speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter sysstat
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2
update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodedev
virtnwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsole
xendomains xenstored zebra
indirect pcsd saned@ systemd-userdbd tftpd uidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=31eb4e3c-f432-4a30-b618-dd595ca988cb  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 126:  
current policy: frequency should be within 1.50 GHz and 2.10 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
  
boost state support:  
Supported: yes  
Active: yes
```

15. sysctl

```
kernel.numa_balancing          0  
kernel.randomize_va_space      0  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      314572800  
vm.dirty_background_ratio      0  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs      3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   1  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never  
enabled     [always] madvise never  
hpage_pmd_size 2097152
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme7n1p3	ext4	2.9T	20G	2.7T	1%	/

20. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant
Serial: SANJACSCM
```

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
6x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
6x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 07/11/2025
BIOS Revision: 1.20
Firmware Revision: 1.16
```

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C | 502.gcc_r(peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flt0
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1130

SPECrate®2017_int_peak = 1170

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-18 01:05:04-0400.

Report generated on 2025-11-05 12:07:54 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.