



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Nov-2023

Software Availability: Oct-2024

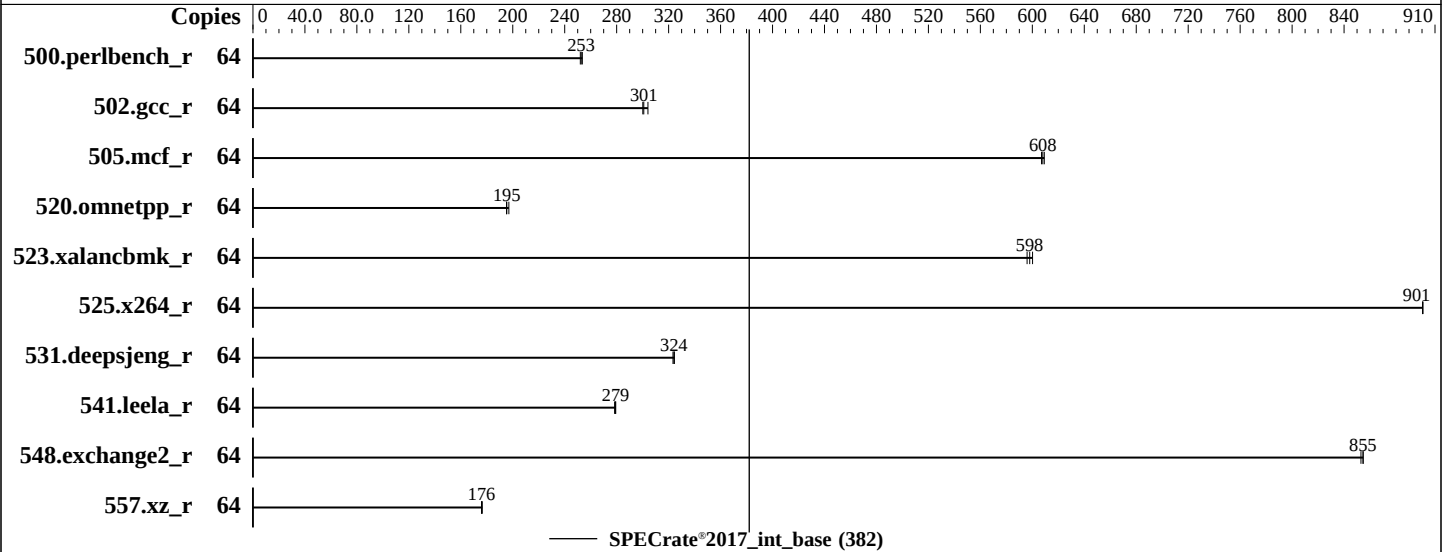

Hardware

CPU Name: AMD EPYC 9124
Max MHz: 3700
Nominal: 3000
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 240 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 2.11.17 released Aug-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	404	252	403	253	402	254							
502.gcc_r	64	301	301	298	304	302	300							
505.mcf_r	64	170	608	170	609	170	607							
520.omnetpp_r	64	430	195	430	195	426	197							
523.xalancbmk_r	64	113	600	113	596	113	598							
525.x264_r	64	124	900	124	901	124	901							
531.deepsjeng_r	64	226	324	227	323	226	324							
541.leela_r	64	380	279	380	279	381	278							
548.exchange2_r	64	197	853	196	855	196	855							
557.xz_r	64	392	176	392	177	393	176							

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

TDP: 400
Determinism Enable set to Power
PPT: 400
NPS: 4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Oct 30 06:05:30 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

1. `uname -a`
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
06:05:30 up 3 min, 1 user, load average: 1.00, 1.54, 0.76
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 06:02 9.00s 1.51s 0.19s tail -f nohup.out

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6189315
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6189315
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.025/temlogs/preenv.intrate.025.0.log --lognum 025.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. `/proc/cpuinfo`
model name : AMD EPYC 9124 16-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 17
stepping : 1
microcode : 0xa101154
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size : 3584 4K pages
cpu cores : 16

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 1: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:        0-63
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9124 16-Core Processor
BIOS Model name:             AMD EPYC 9124 16-Core Processor
BIOS CPU family:             107
CPU family:                  25
Model:                       17
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                   2
Stepping:                    1
Frequency boost:              enabled
CPU(s) scaling MHz:          81%
CPU max MHz:                 3711.9141
CPU min MHz:                 1500.0000
BogoMIPS:                    5990.86
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                             erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                             amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                             flushbyasid decodeassists pausefilter pfthreshold avic
                             v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                             ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                             debug_swap
Virtualization:              AMD-V
L1d cache:                   1 MiB (32 instances)
L1i cache:                   1 MiB (32 instances)
L2 cache:                    32 MiB (32 instances)
L3 cache:                    128 MiB (8 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 193082 MB
node 0 free: 192703 MB
node 1 cpus: 4-7,36-39
node 1 size: 193533 MB
node 1 free: 193236 MB
node 2 cpus: 8-11,40-43
node 2 size: 193533 MB
node 2 free: 193210 MB
node 3 cpus: 12-15,44-47
node 3 size: 193533 MB
node 3 free: 193233 MB
node 4 cpus: 16-19,48-51
node 4 size: 193495 MB
node 4 free: 193109 MB
node 5 cpus: 20-23,52-55
node 5 size: 193533 MB
node 5 free: 193215 MB
node 6 cpus: 24-27,56-59
node 6 size: 193533 MB
node 6 free: 193181 MB
node 7 cpus: 28-31,60-63
node 7 size: 193109 MB
node 7 free: 192716 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

9. /proc/meminfo

MemTotal: 1584491120 kB

10. who -r

run-level 3 Oct 30 06:02

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6a0e1725-852e-4de4-b169-0d120ff68381
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=364M,high
crashkernel=72M,low
nohz_full=1-63

14. cpupower frequency-info

analyzing CPU 56:
current policy: frequency should be within 1.50 GHz and 3.00 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Platform Notes (Continued)

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	219G	34G	182G	16%	/home

20. /sys/devices/virtual/dmi/id

Vendor: XFUSION
Product: 2258 V7
Product Family: Genoa

21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Nov-2023

Software Availability: Oct-2024

Platform Notes (Continued)

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology MTC40F2046S1RC56BD1 64 GB 2 rank 5600, configured at 4800
8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION
BIOS Version: 2.11.17
BIOS Date: 08/07/2025
BIOS Revision: 2.11

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 548.exchange2_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
AMD EPYC 9124

SPECrate®2017_int_base = 382

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Nov-2023
Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -inline-recursion=4 -Wl, -mllvm -Wl, -lsr-in-nested-loop  
-Wl, -mllvm -Wl, -enable-iv-split -z muldefs -O3 -march=znver5  
-fvecLib=AMDLIBM -ffast-math -fltO  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-30 06:05:30-0400.

Report generated on 2025-11-19 10:38:11 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.