



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

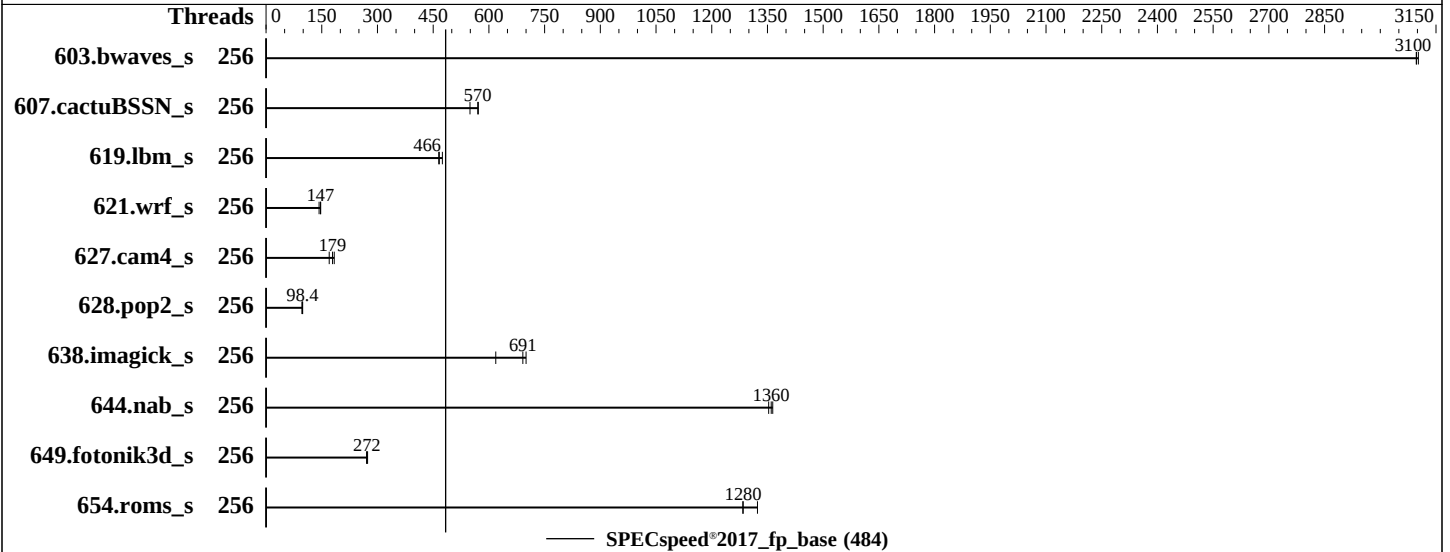

Hardware

CPU Name: Intel Xeon 6768P
Max MHz: 3900
Nominal: 2400
Enabled: 256 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x SSD PCIe M.2, 2 TB
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.0.2 of Intel Fortran
Compiler for Linux;
Parallel: Yes
Firmware: Fsas Technologies Inc. BIOS Version V1.0.0.0
R1.2.0 for D4136-A1x. Released Dec-2025
tested as V1.0.0.0 R1.0.0 for D4136-A1x Oct-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	256	19.0	3100	19.1	3100	<u>19.0</u>	<u>3100</u>							
607.cactuBSSN_s	256	<u>29.2</u>	<u>570</u>	29.2	572	30.4	549							
619.lbm_s	256	11.3	465	<u>11.2</u>	<u>466</u>	11.0	475							
621.wrf_s	256	92.6	143	90.0	147	<u>90.1</u>	<u>147</u>							
627.cam4_s	256	52.1	170	48.3	184	<u>49.5</u>	<u>179</u>							
628.pop2_s	256	121	98.4	123	96.5	<u>121</u>	<u>98.4</u>							
638.imagick_s	256	<u>20.9</u>	<u>691</u>	23.3	619	20.6	700							
644.nab_s	256	12.8	1360	12.9	1350	<u>12.8</u>	<u>1360</u>							
649.fotonik3d_s	256	<u>33.5</u>	<u>272</u>	33.7	271	33.3	273							
654.roms_s	256	<u>12.3</u>	<u>1280</u>	11.9	1320	12.3	1280							

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/Benchmark/speccpu-24.0/lib/intel64:/home/Benchmark/speccpu-24.0/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes

BIOS configuration:

Fan Control = Full

CPU Performance Boost = Aggressive

Adjacent Cache Line Prefetch = Disabled

LLC Prefetch = Enabled

Homeless Prefetch = Enabled

XPT Prefetch = Disabled

UPI Link L0p = Disabled

UPI Link L1 = Disabled

CPU C1 auto demotion = Enabled

Sysinfo program /home/Benchmark/speccpu-24.0/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Nov 29 14:59:26 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
 14:59:26 up 7:03, 1 user, load average: 20.22, 135.37, 180.72
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              08:00    6:58m  6.10s  1.55s pcm-memory 15 --nocxl -csv=pcm-memory.csv
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 8254294
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 8254294
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=256 --tune base -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=256 --tune base --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/temlogs/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu-24.0
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6768P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings       : 128
4 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95
physical id 2: core ids 0-31,64-95
physical id 3: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
physical id 1: apicids 256-319,384-447
physical id 2: apicids 512-575,640-703
physical id 3: apicids 768-831,896-959
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	512
On-line CPU(s) list:	0-511
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6768P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	64
Socket(s):	4
Stepping:	1
CPU(s) scaling MHz:	21%
CPU max MHz:	3900.0000
CPU min MHz:	800.0000
BogoMIPS:	4800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	12 MiB (256 instances)
L1i cache:	16 MiB (256 instances)
L2 cache:	512 MiB (256 instances)
L3 cache:	1.3 GiB (4 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-63,256-319
NUMA node1 CPU(s):	64-127,320-383
NUMA node2 CPU(s):	128-191,384-447
NUMA node3 CPU(s):	192-255,448-511
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	64K	16M	16	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-63,256-319
node 0 size: 515604 MB
node 0 free: 514145 MB
node 1 cpus: 64-127,320-383
node 1 size: 516061 MB
node 1 free: 514937 MB
node 2 cpus: 128-191,384-447
node 2 size: 516023 MB
node 2 free: 514875 MB
node 3 cpus: 192-255,448-511
node 3 size: 515910 MB
node 3 free: 514861 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10

9. /proc/meminfo

MemTotal: 2113126880 kB

10. who -r

run-level 3 Nov 29 07:57

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autovast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

firewalld fsidd gpm grub2-once haveged ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
vncserver@
systemd-userdbd wickedd

indirect

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=6490486a-f020-45c4-b83e-03e98fc56a3b
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 327:

current policy: frequency should be within 800 MHz and 3.90 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information

SPEC is set to: /home/Benchmark/speccpu-24.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	btrfs	1.9T	146G	1.8T	8%	/home

20. /sys/devices/virtual/dmi/id

Vendor: Fsas Technologies
Product: PRIMERGY RX4770 M8
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Fsas Technologies
BIOS Version: V1.0.0.0 R1.0.0 for D4136-A1x
BIOS Date: 10/28/2025
BIOS Revision: 1.0
Firmware Revision: 3.6

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECspeed®2017_fp_base = 484

SPECspeed®2017_fp_peak = Not Run

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-29 00:59:25-0500.

Report generated on 2025-12-16 21:31:48 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-16.