



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

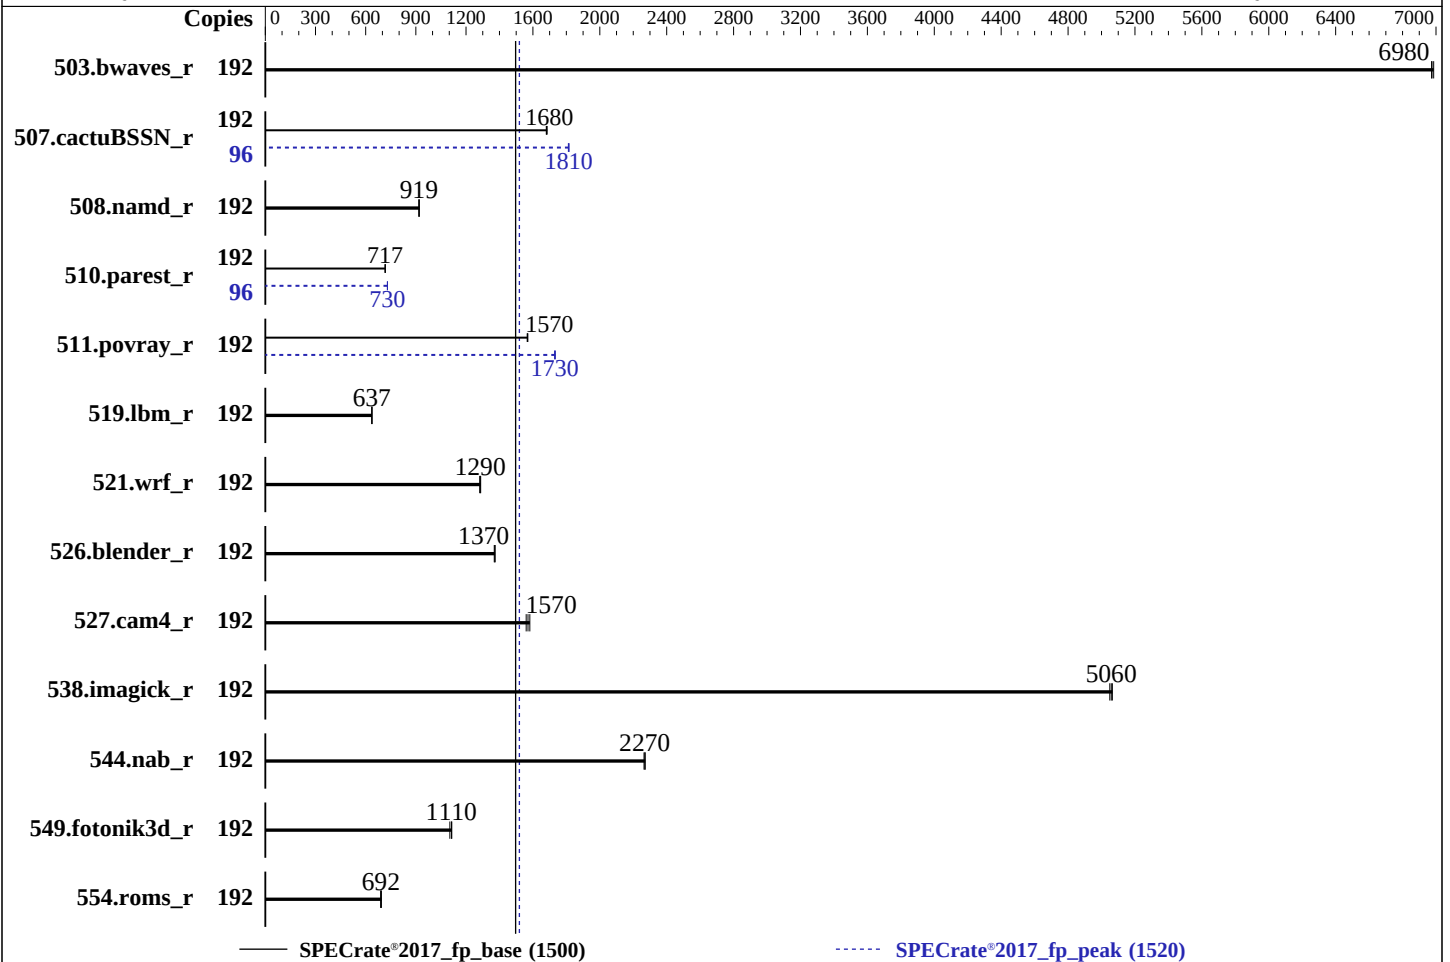

Hardware

CPU Name: Intel Xeon 6728P
Max MHz: 4100
Nominal: 2700
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 1,2,4 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 144 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 1.8 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.23.60-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.43 07/09/2025 released Jul-2025
File System: btrfs
System State: Run level 3 (multi-user graphical)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	276	6970	276	6990	276	6980	192	276	6970	276	6990	276	6980
507.cactuBSSN_r	192	144	1690	145	1680	145	1680	96	67.0	1820	67.1	1810	67.0	1810
508.namd_r	192	199	919	199	918	198	921	192	199	919	199	918	198	921
510.parest_r	192	701	717	701	717	701	717	96	344	730	344	730	344	730
511.povray_r	192	286	1570	286	1570	286	1570	192	259	1730	259	1730	259	1730
519.lbm_r	192	317	637	317	637	318	637	192	317	637	317	637	318	637
521.wrf_r	192	335	1290	334	1290	336	1280	192	335	1290	334	1290	336	1280
526.blender_r	192	213	1370	213	1370	214	1370	192	213	1370	213	1370	214	1370
527.cam4_r	192	215	1560	212	1580	214	1570	192	215	1560	212	1580	214	1570
538.imagick_r	192	94.6	5050	94.4	5060	94.3	5060	192	94.6	5050	94.4	5060	94.3	5060
544.nab_r	192	142	2270	143	2260	142	2270	192	142	2270	143	2260	142	2270
549.fotonik3d_r	192	672	1110	671	1110	678	1100	192	672	1110	671	1110	678	1100
554.roms_r	192	442	690	440	694	441	692	192	442	690	440	694	441	692

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

Collaborative Power Control set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Sep 5 19:57:48 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. `uname -a`
 2. `w`
 3. Username
 4. `ulimit -a`
 5. `sysinfo process ancestry`
 6. `/proc/cpuinfo`
 7. `lscpu`
 8. `numactl --hardware`
 9. `/proc/meminfo`
 10. `who -r`
 11. Systemd service manager version: `systemd 254 (254.27+suse.167.g130293e510)`
 12. Services, from `systemctl list-unit-files`
 13. Linux kernel boot-time arguments, from `/proc/cmdline`
 14. `cpupower frequency-info`
 15. `tuned-adm active`
 16. `sysctl`
 17. `/sys/kernel/mm/transparent_hugepage`
 18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
 19. OS release
 20. Disk information
 21. `/sys/devices/virtual/dmi/id`
 22. `dmidecode`
 23. BIOS
-

1. `uname -a`
Linux localhost 6.4.0-150600.23.60-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:43:49 UTC 2025 (6f98261)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

2. w

```
19:57:48 up 9:06, 1 user, load average: 138.31, 184.44, 192.04
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
benchmark pts/5    :pts/3:S.0      11:01    8:52m 0.87s  0.03s sudo su
```

3. Username

```
From environment variable $USER: root
From the command 'logname':      benchmark
```

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 8255269
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 8255269
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
SCREEN -S spec
/bin/bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
6728P-avx512-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
6728P-avx512-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate
--tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6728P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

microcode : 0x10003c2
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores : 24
siblings : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 2: core ids 0-23
physical id 3: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
physical id 2: apicids 256-303
physical id 3: apicids 384-431

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	192
On-line CPU(s) list:	0-191
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6728P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	24
Socket(s):	4
Stepping:	1
BogoMIPS:	5400.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	4.5 MiB (96 instances)
L1i cache:	6 MiB (96 instances)
L2 cache:	192 MiB (96 instances)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

L3 cache: 576 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	64K	6M	16	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	144M	576M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 515683 MB
node 0 free: 488608 MB
node 1 cpus: 24-47,120-143
node 1 size: 516083 MB
node 1 free: 491440 MB
node 2 cpus: 48-71,144-167
node 2 size: 516044 MB
node 2 free: 495514 MB
node 3 cpus: 72-95,168-191
node 3 size: 516039 MB
node 3 free: 487897 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10

9. /proc/meminfo

MemTotal: 2113382636 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

run-level 3 Sep 5 11:01 last=5

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemu-wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autoyast-init-scripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfs-server nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd-generate_opts smb snmpd snmptrapd speech-dispatcher systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcshd tuned udisks2 update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodevdev virtnwfilterd virtsecret virtstoraged vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd tftpd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.60-default
root=UUID=31ddc59e-f5ed-47da-8154-f16fa2fc98b8
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 105:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

Current active profile: virtual-host

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	5
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

```
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1n1p3 btrfs 1.8T 316G 1.5T 18% /home
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     HPE ProLiant Compute DL580 Gen12
Product Family: ProLiant
Serial:      SANJACSCM
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x Hynix HMC694AHBRA480N 64 GB 2 rank 6400
  5x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
  23x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Platform Notes (Continued)

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.43
BIOS Date: 07/09/2025
BIOS Revision: 1.43
Firmware Revision: 1.17

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -wl, -z, muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -wl, -z, muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017_fp_base = 1500

SPECrate®2017_fp_peak = 1520

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl, -z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-05 20:57:47-0400.

Report generated on 2026-02-10 19:32:25 by CPU2017 PDF formatter v6716.

Originally published on 2026-02-10.