



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL380 Gen12


(2.70 Ghz, Intel Xeon 6728P)

## SPECrate®2017\_fp\_base = 796

## SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2025  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jun-2024

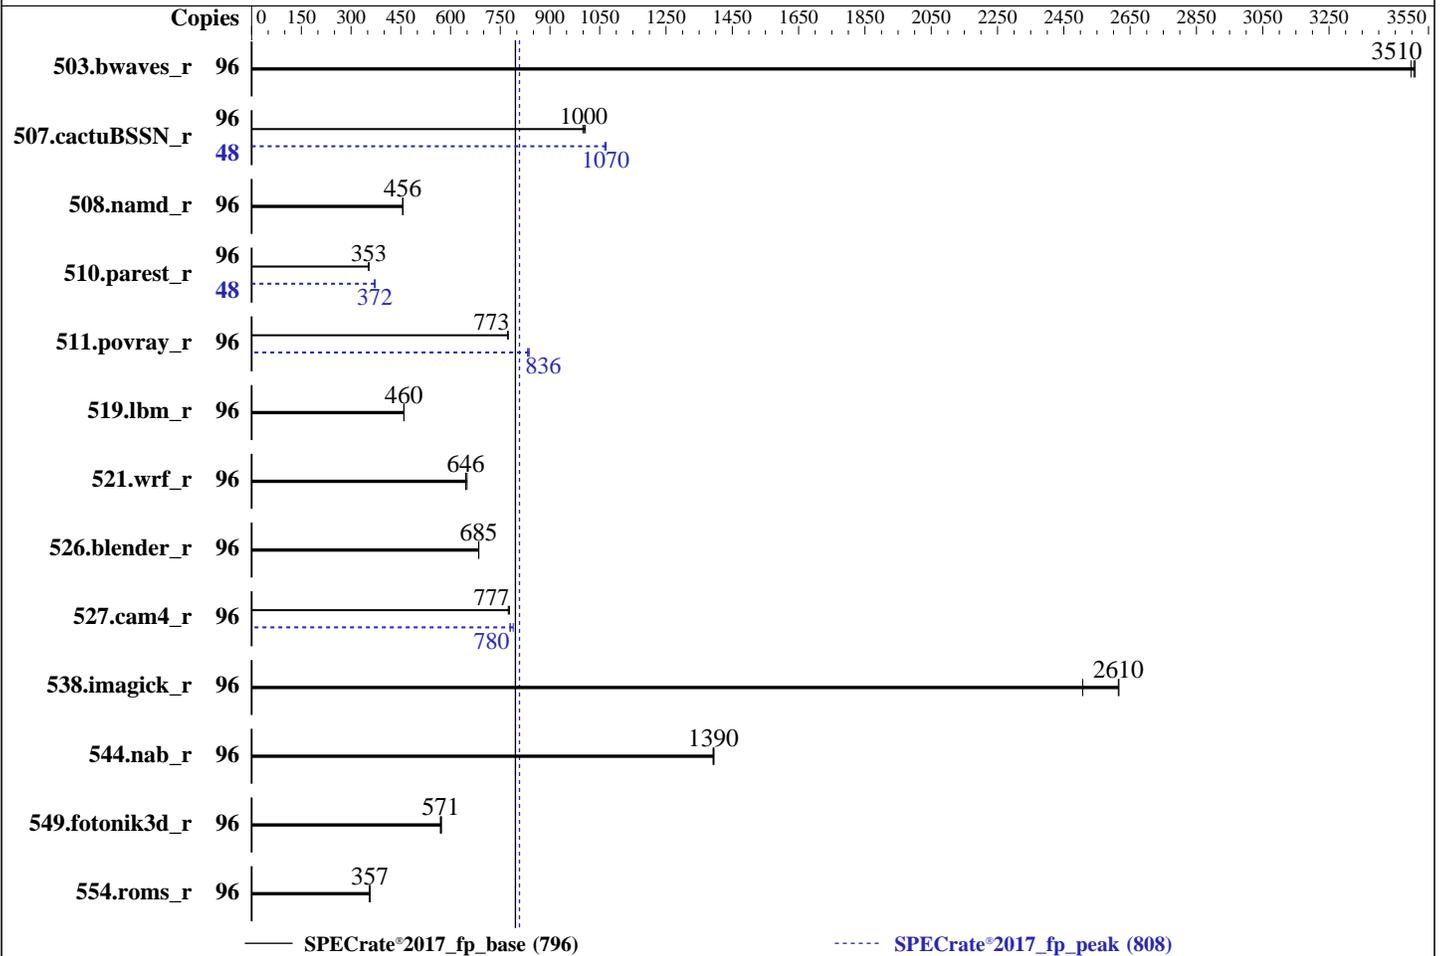

### Hardware

CPU Name: Intel Xeon 6728P  
 Max MHz: 4100  
 Nominal: 2700  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 144 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 3.2 TB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.52 10/03/2025 released Oct-2025  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.70 Ghz, Intel Xeon 6728P)

SPECrate®2017\_fp\_base = 796

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2025  
Hardware Availability: Jul-2025  
Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<b>275</b>	<b>3510</b>	274	3510	275	3500	96	<b>275</b>	<b>3510</b>	274	3510	275	3500
507.cactuBSSN_r	96	121	1010	<b>121</b>	<b>1000</b>	122	999	48	<b>56.9</b>	<b>1070</b>	56.9	1070	57.0	1070
508.namd_r	96	200	456	200	456	<b>200</b>	<b>456</b>	96	200	456	200	456	<b>200</b>	<b>456</b>
510.parest_r	96	<b>711</b>	<b>353</b>	711	353	711	353	48	<b>338</b>	<b>372</b>	338	371	338	372
511.povray_r	96	290	774	290	773	<b>290</b>	<b>773</b>	96	269	832	<b>268</b>	<b>836</b>	268	837
519.lbm_r	96	220	460	<b>220</b>	<b>460</b>	220	459	96	220	460	<b>220</b>	<b>460</b>	220	459
521.wrf_r	96	331	650	<b>333</b>	<b>646</b>	333	646	96	331	650	<b>333</b>	<b>646</b>	333	646
526.blender_r	96	<b>213</b>	<b>685</b>	213	685	213	685	96	<b>213</b>	<b>685</b>	213	685	213	685
527.cam4_r	96	<b>216</b>	<b>777</b>	216	777	217	774	96	<b>215</b>	<b>780</b>	213	789	215	780
538.imagick_r	96	<b>91.3</b>	<b>2610</b>	95.2	2510	91.3	2620	96	<b>91.3</b>	<b>2610</b>	95.2	2510	91.3	2620
544.nab_r	96	116	1390	116	1390	<b>116</b>	<b>1390</b>	96	116	1390	116	1390	<b>116</b>	<b>1390</b>
549.fotonik3d_r	96	657	569	653	573	<b>655</b>	<b>571</b>	96	657	569	653	573	<b>655</b>	<b>571</b>
554.roms_r	96	427	357	<b>427</b>	<b>357</b>	430	355	96	427	357	<b>427</b>	<b>357</b>	430	355

SPECrate®2017\_fp\_base = **796**

SPECrate®2017\_fp\_peak = **808**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

Collaborative Power Control set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun Nov 9 09:20:37 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

**(2.70 Ghz, Intel Xeon 6728P)**

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
09:20:37 up 3 days, 7:00, 2 users, load average: 0.00, 0.00, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 172.24.77.124 Thu02 3days 0.03s 0.03s -bash  
root pts/1 172.16.0.100 Fri01 12.00s 0.78s 0.00s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062766  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062766  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/1  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak -o all fprate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak --output\_format all --nopower  
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.005/templogs/preenv.fprate.005.0.log --lognum 005.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) 6728P  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 173  
stepping : 1  
microcode : 0x10003f3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL380 Gen12

(2.70 Ghz, Intel Xeon 6728P)

## SPECrate®2017\_fp\_base = 796

## SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2025  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swappgs bhi
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) 6728P
BIOS Model name:       Intel(R) Xeon(R) 6728P  CPU @ 2.7GHz
BIOS CPU family:       179
CPU family:             6
Model:                  173
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               1
BogoMIPS:               5400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:              2.3 MiB (48 instances)
L1i cache:              3 MiB (48 instances)
L2 cache:               96 MiB (48 instances)
L3 cache:               288 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):     0-23,48-71
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL380 Gen12

(2.70 Ghz, Intel Xeon 6728P)

## SPECrate®2017\_fp\_base = 796

## SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2025  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

```

NUMA node1 CPU(s):                24-47,72-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability Lltf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                   PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	64K	3M	16	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 257709 MB
node 0 free: 229203 MB
node 1 cpus: 24-47,72-95
node 1 size: 258012 MB
node 1 free: 233227 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 528099424 kB

10. who -r

run-level 3 Nov 6 02:20

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

disabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
              autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
              chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
              exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
              issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
              omtree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
              smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
              systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
              systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect      pcsd saned@ systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=4461ad3b-5550-46a9-a453-c296e0e04d21
splash=silent
resume=/dev/disk/by-uuid/930cc1e7-2c0e-48d3-84ad-33c84ff87515
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 94:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

-----  
19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

-----  
20. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 1.9T 817G 1.1T 43% /home
```

-----  
21. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: HPE ProLiant Compute DL380 Gen12
Product Family: ProLiant
Serial: CNXD1M02CD
```

-----  
22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Hynix HMCG88AHBRA471N 32 GB 2 rank 6400

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 1.52
BIOS Date: 10/03/2025
BIOS Revision: 1.52
Firmware Revision: 1.11
```

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:

`-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:

`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.70 Ghz, Intel Xeon 6728P)

**SPECrate®2017\_fp\_base = 796**

**SPECrate®2017\_fp\_peak = 808**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-08 22:50:37-0500.

Report generated on 2026-02-10 19:32:29 by CPU2017 PDF formatter v6716.

Originally published on 2026-02-10.