



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

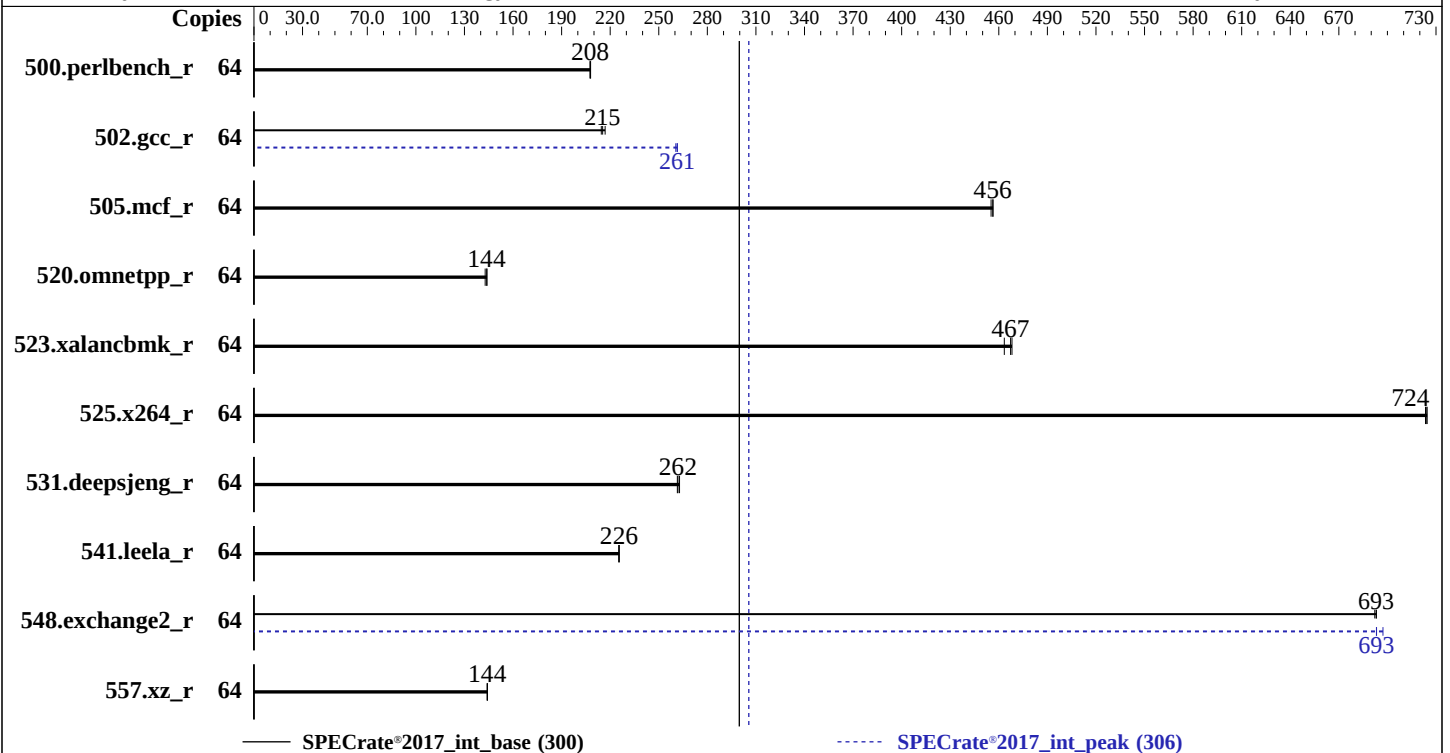

Hardware

CPU Name: AMD EPYC 8324PN
Max MHz: 3000
Nominal: 2050
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip,
16 MB shared / 4 cores
Other: None
Memory: 192 GB (6 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB M.2 NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Lenovo BIOS Version MBE119H 6.30 released Sep-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<u>491</u>	<u>208</u>	491	208	490	208	64	<u>491</u>	<u>208</u>	491	208	490	208
502.gcc_r	64	422	214	418	217	<u>421</u>	<u>215</u>	64	<u>347</u>	<u>261</u>	347	261	348	261
505.mcf_r	64	227	456	<u>227</u>	<u>456</u>	227	455	64	227	456	<u>227</u>	<u>456</u>	227	455
520.omnetpp_r	64	583	144	588	143	<u>584</u>	<u>144</u>	64	583	144	588	143	<u>584</u>	<u>144</u>
523.xalancbmk_r	64	146	463	<u>145</u>	<u>467</u>	144	468	64	146	463	<u>145</u>	<u>467</u>	144	468
525.x264_r	64	<u>155</u>	<u>724</u>	155	724	155	725	64	<u>155</u>	<u>724</u>	155	724	155	725
531.deepsjeng_r	64	<u>280</u>	<u>262</u>	281	261	279	263	64	<u>280</u>	<u>262</u>	281	261	279	263
541.leela_r	64	470	225	<u>470</u>	<u>226</u>	470	226	64	470	225	<u>470</u>	<u>226</u>	470	226
548.exchange2_r	64	<u>242</u>	<u>693</u>	242	693	242	692	64	<u>242</u>	<u>693</u>	240	697	242	693
557.xz_r	64	479	144	<u>480</u>	<u>144</u>	480	144	64	479	144	<u>480</u>	<u>144</u>	480	144

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Dec 2 11:52:36 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Platform Notes (Continued)

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
11:52:36 up 3 min, 1 user, load average: 0.09, 0.08, 0.03
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 771779
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 771779
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.069/temlogs/preenv.intrate.069.0.log --lognum 069.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

6. /proc/cpuinfo
model name : AMD EPYC 8324PN 32-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 160
stepping : 2
microcode : 0xaa00219
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size : 3584 4K pages
cpu cores : 32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Platform Notes (Continued)

siblings : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:        0-63
Vendor ID:                   AuthenticAMD
Model name:                  AMD EPYC 8324PN 32-Core Processor
CPU family:                  25
Model:                      160
Thread(s) per core:         2
Core(s) per socket:         32
Socket(s):                   1
Stepping:                    2
Frequency boost:             enabled
CPU(s) scaling MHz:         74%
CPU max MHz:                 2050.0000
CPU min MHz:                 1500.0000
BogoMIPS:                   4093.75
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                             erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                             amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
                             vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                             v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                             ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                             debug_swap
Virtualization:              AMD-V
L1d cache:                   1 MiB (32 instances)
L1i cache:                   1 MiB (32 instances)
L2 cache:                    32 MiB (32 instances)
L3 cache:                    128 MiB (8 instances)
NUMA node(s):                1
NUMA node0 CPU(s):          0-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; Safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 192972 MB
node 0 free: 192090 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 197603364 kB

10. who -r

run-level 3 Dec 2 11:50

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fs-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievld issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=10ab2479-28f4-4c63-abf5-3887b0081c47
splash=silent
quiet
security=apparmor
mitigations=auto

14. cpupower frequency-info
analyzing CPU 48:
current policy: frequency should be within 1.50 GHz and 2.05 GHz.
The governor "ondemand" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Platform Notes (Continued)

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 446G 37G 409G 9% /

20. /sys/devices/virtual/dmi/id

Vendor: Lenovo
Product: ThinkEdge SE455 V3 Planar
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
6x SK Hynix HMC88AEBRA173N 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: MBE119H-6.30
BIOS Date: 09/03/2025
BIOS Revision: 6.30
Firmware Revision: 8.10

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Base Portability Flags (Continued)

502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3
(2.05 GHz, AMD EPYC 8324PN)

SPECrate®2017_int_base = 300

SPECrate®2017_int_peak = 306

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2025

Hardware Availability: Nov-2023

Software Availability: Jun-2025

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-K.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-K.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-01 22:52:36-0500.

Report generated on 2026-01-14 13:47:01 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-13.