



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

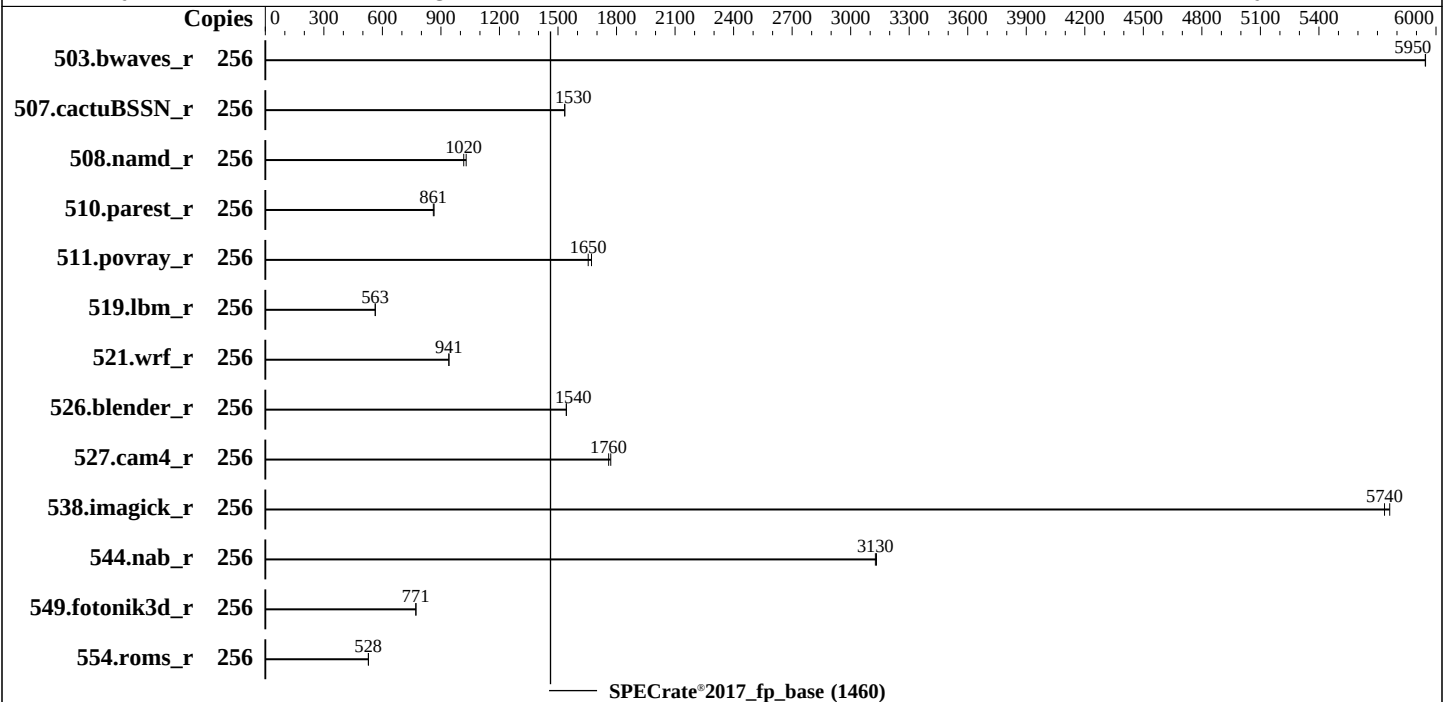

Hardware

CPU Name: Intel Xeon 6760P
Max MHz: 3800
Nominal: 2200
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 320 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 7.00.19 released Sep-2025 BIOS
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Dec-2025

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	432	5950	<u>432</u>	<u>5950</u>									
507.cactuBSSN_r	256	211	1530	<u>211</u>	<u>1530</u>									
508.namd_r	256	236	1030	<u>239</u>	<u>1020</u>									
510.parest_r	256	774	865	<u>778</u>	<u>861</u>									
511.povray_r	256	<u>361</u>	<u>1650</u>	358	1670									
519.lbm_r	256	<u>479</u>	<u>563</u>	479	564									
521.wrf_r	256	<u>610</u>	<u>941</u>	609	941									
526.blender_r	256	<u>253</u>	<u>1540</u>	253	1540									
527.cam4_r	256	253	1770	<u>254</u>	<u>1760</u>									
538.imagick_r	256	110	5760	<u>111</u>	<u>5740</u>									
544.nab_r	256	138	3130	<u>138</u>	<u>3130</u>									
549.fotonik3d_r	256	<u>1294</u>	<u>771</u>	1292	772									
554.roms_r	256	770	528	<u>770</u>	<u>528</u>									

SPECrate®2017_fp_base = 1460

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable

ACPI C6x Enumeration = C6 as ACPI C2

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Mon Dec 29 14:05:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
14:05:44 up 7 min, 1 user, load average: 0.02, 0.11, 0.08
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 14:00 8.00s 1.40s 0.02s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2061635
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2061635
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate -n 2
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --iterations 2
--nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.160/temlogs/preenv.fprate.160.0.log --lognum 160.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6760P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003d0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-31,64-95
physical id 1:  core ids 0-31,64-95
physical id 0:  apicids 0-63,128-191
physical id 1:  apicids 256-319,384-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6760P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):             2
Stepping:              1
CPU(s) scaling MHz:    24%
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                        vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             8 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-31,128-159
NUMA node1 CPU(s):     32-63,160-191
NUMA node2 CPU(s):     64-95,192-223
NUMA node3 CPU(s):     96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	16	Unified	3	327680	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 128535 MB
node 0 free: 127948 MB
node 1 cpus: 32-63,160-191
node 1 size: 128968 MB
node 1 free: 128440 MB
node 2 cpus: 64-95,192-223
node 2 size: 129006 MB
node 2 free: 128405 MB
node 3 cpus: 96-127,224-255
node 3 size: 128927 MB
node 3 free: 128352 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 527809188 kB

10. who -r

run-level 3 Dec 29 13:59

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
ebtables exchange-bmc-os-info firewallld fsidd gnome-remote-desktop gpm grub2-once haveged
ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd
nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck
rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=caa76791-ac18-477b-958c-517956aed673
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 252:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs    60000
    defrag                    1
    max_ptes_none             511
    max_ptes_shared           256
    max_ptes_swap              64
    pages_to_scan              4096
    scan_sleep_millisecs      10000
```

```
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP7
```

```
19. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        btrfs 892G  418G  475G  47% /home
```

```
20. /sys/devices/virtual/dmi/id
Vendor:          New H3C Technologies Co., Ltd.
Product:         H3C UniServer R4700 G7
Product Family:  Rack
Serial:          210235A51FH247000008
```

```
21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

```
Memory:
10x Hynix HMC688AHBRA290N 32 GB 2 rank 6400
1x Hynix HMC688AHBRA472N 32 GB 2 rank 6400
5x Hynix HMC688AHBRA478N 32 GB 2 rank 6400
```

```
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     7.00.19
BIOS Date:        09/26/2025
BIOS Revision:    5.35
Firmware Revision: 2.8
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1460

H3C UniServer R4700 G7 (Intel Xeon 6760P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-29 01:05:44-0500.

Report generated on 2026-01-27 17:51:22 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-27.