



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

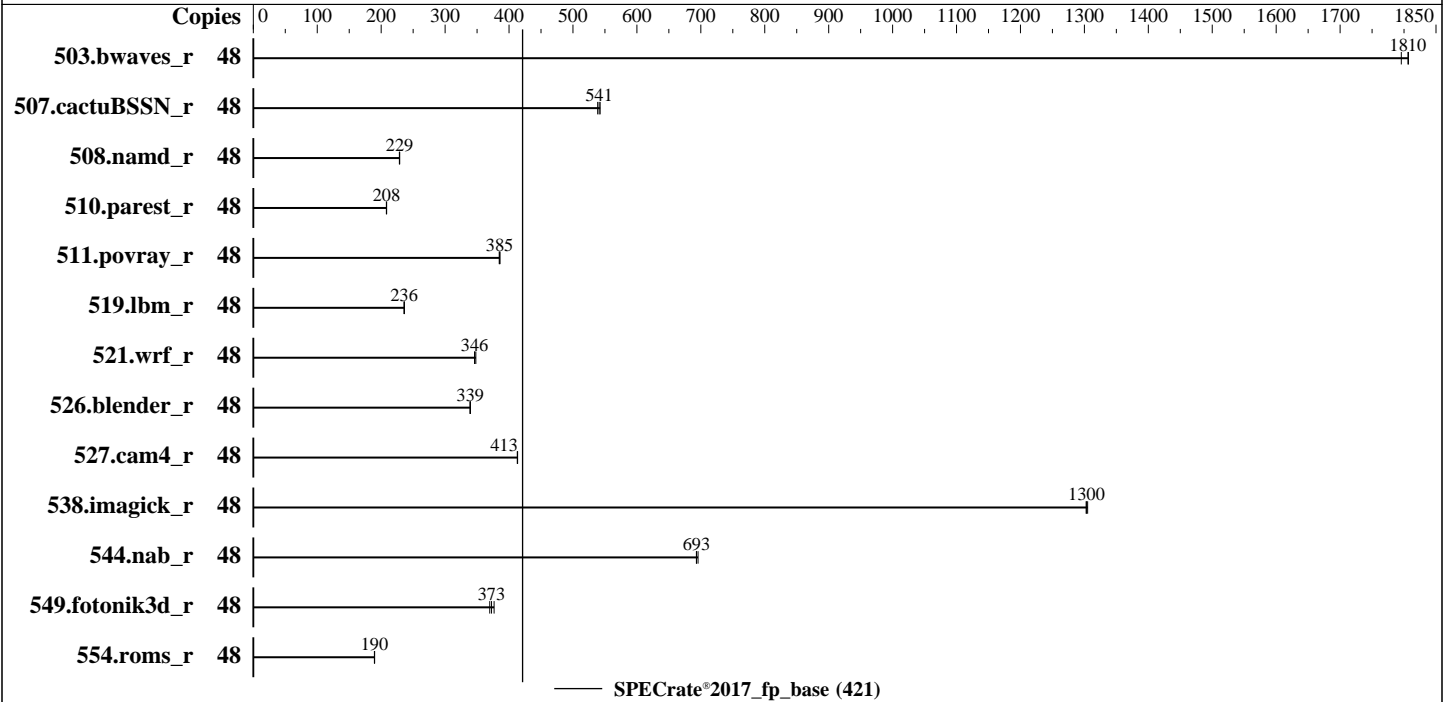

Hardware

CPU Name: Intel Xeon 6505P
 Max MHz: 4100
 Nominal: 2200
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 7.00.19 released Sep-2025 BIOS
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	266	1810	268	1800	267	1810							
507.cactuBSSN_r	48	112	543	112	541	113	539							
508.namd_r	48	199	229	200	228	199	229							
510.parest_r	48	603	208	602	209	603	208							
511.povray_r	48	291	385	290	386	291	385							
519.lbm_r	48	214	236	214	236	214	236							
521.wrf_r	48	309	348	311	346	311	346							
526.blender_r	48	215	340	216	339	215	339							
527.cam4_r	48	203	413	203	413	203	413							
538.imagick_r	48	91.5	1310	91.6	1300	91.6	1300							
544.nab_r	48	117	693	116	696	117	693							
549.fotonik3d_r	48	502	373	497	377	506	370							
554.roms_r	48	402	190	402	190	403	189							

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable

ACPI C6x Enumeration = C6 as ACPI C2

Latency Optimized Mode = Enabled

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jan 16 12:04:04 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
12:04:04 up 2:20, 1 user, load average: 22.56, 41.07, 45.41
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
root      tty1      -                09:45      2:18m  1.01s  0.02s  -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062145
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062145
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.205/templogs/preenv.fprate.205.0.log --lognum 205.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6505P
vendor_id      : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003d0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 12
siblings        : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-11
physical id 1:  core ids 0-11
physical id 0:  apicids 0-23
physical id 1:  apicids 128-151
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) 6505P
CPU family:             6
Model:                  173
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
Stepping:               1
CPU(s) scaling MHz:    43%
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               4400.00
Flags:                  fpu_vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pcdm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsave xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnni avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities

Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             1.5 MiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              96 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-11,24-35
NUMA node1 CPU(s):    12-23,36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability Lltf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Spec rstack overflow: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	64K	1.5M	16	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	48M	96M	16	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 257578 MB
node 0 free: 248632 MB
node 1 cpus: 12-23,36-47
node 1 size: 257987 MB
node 1 free: 251370 MB
node distances:
node  0  1
  0: 10  21
  1: 21  10
```

9. /proc/meminfo

MemTotal: 527939784 kB

10. who -r

run-level 3 Jan 16 09:44

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
ebtables exchange-bmc-os-info firewallld fsidd gnome-remote-desktop gpm grub2-once haveged
ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd
nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck
rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

indirect update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=caa76791-ac18-477b-958c-517956aed673
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 39:
current policy: frequency should be within 800 MHz and 4.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information

SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 892G 425G 468G 48% /home

20. /sys/devices/virtual/dmi/id

Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R4300 G7
Product Family: Rack
Serial: 210235A5DCH259000004

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
10x Hynix HMC88AHBRA290N 32 GB 2 rank 6400
1x Hynix HMC88AHBRA472N 32 GB 2 rank 6400
5x Hynix HMC88AHBRA478N 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.00.19
BIOS Date: 09/26/2025
BIOS Revision: 5.35
Firmware Revision: 2.8

Compiler Version Notes

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base) 526.blender_r(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
 C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
 Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
 Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 421

H3C UniServer R4300 G7 (Intel Xeon 6505P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-01-15 23:04:04-0500.

Report generated on 2026-04-07 22:09:35 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-07.