



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081


Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

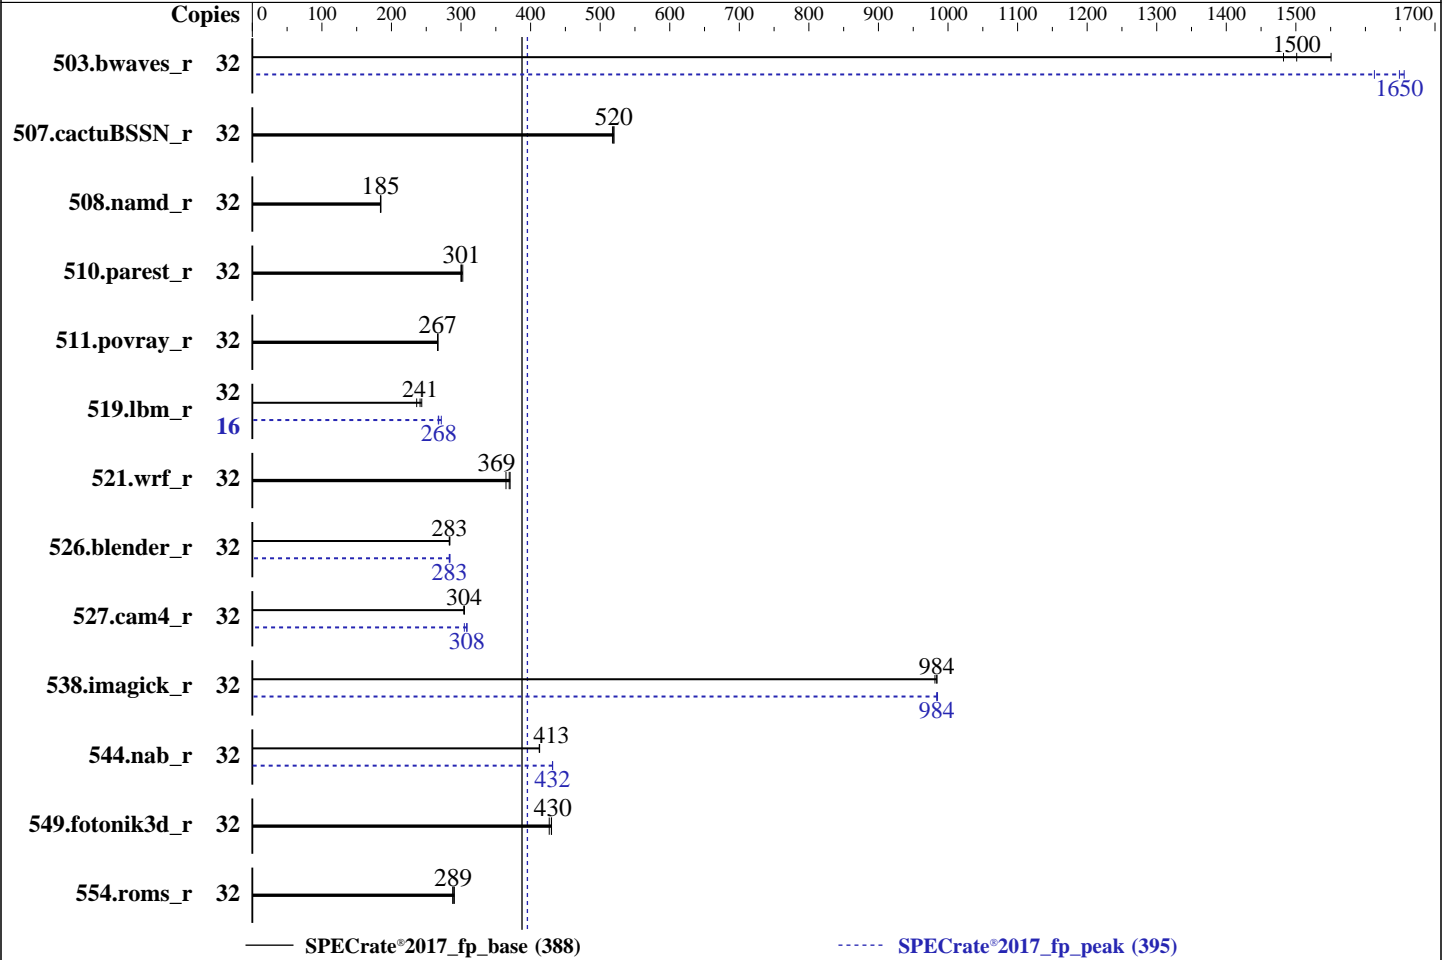

Hardware

CPU Name: AMD EPYC 9015
 Max MHz: 4100
 Nominal: 3600
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1.92 TB SATA III SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-106-generic x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: BIOS Version 1002 released Oct-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	214	1500	216	1480	207	1550	32	195	1650	199	1610	194	1660
507.cactuBSSN_r	32	77.9	520	78.0	520	78.3	518	32	77.9	520	78.0	520	78.3	518
508.namd_r	32	165	185	165	185	165	184	32	165	185	165	185	165	184
510.parest_r	32	277	302	279	300	278	301	32	277	302	279	300	278	301
511.povray_r	32	281	266	280	267	280	267	32	281	266	280	267	280	267
519.lbm_r	32	140	241	138	244	143	236	16	63.1	267	62.1	272	62.9	268
521.wrf_r	32	197	365	193	371	194	369	32	197	365	193	371	194	369
526.blender_r	32	172	283	172	283	172	284	32	172	284	172	283	172	283
527.cam4_r	32	184	304	184	304	184	305	32	182	308	184	305	181	309
538.imagick_r	32	81.1	981	80.9	984	80.9	984	32	80.9	984	80.8	985	80.9	984
544.nab_r	32	131	413	131	413	130	413	32	125	432	125	431	125	432
549.fotonik3d_r	32	292	427	290	430	290	430	32	292	427	290	430	290	430
554.roms_r	32	176	289	177	288	175	290	32	176	289	177	288	175	290

SPECrate®2017_fp_base = **388**

SPECrate®2017_fp_peak = **395**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

The Linux operating system is running in graphical.target.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Operating System Notes (Continued)

'systemctl stop tuned; systemctl disable tuned' were used to disable the tuned daemon.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Bios settings:

```
SR-IOV Support = Disable  
SVM Mode = Disable  
NUMA nodes per socket = NPS2  
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 155  
PPT Control = Manual  
PPT = 155  
SMT Control = Enable
```

BMC Configuration:

```
Fan mode = Full speed mode
```

```
Sysinfo program /cpu2017-1.1.9/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sut Wed Mar 25 21:08:40 2026
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Platform Notes (Continued)

- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.14)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux sut 6.8.0-106-generic #106-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 6 07:58:08 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
21:08:40 up 11:49, 1 user, load average: 22.99, 29.92, 31.18
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      ttyl    -              09:19       3:46m      1.08s    0.20s    /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   unlimited
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189757
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --system --deserialize=83
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Platform Notes (Continued)

```

/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017-1.1.9

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9015 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-3,8-11
physical id 1: core ids 0-3,8-11
physical id 0: apicids 0-7,16-23
physical id 1: apicids 32-39,48-55

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       32
On-line CPU(s) list:         0-31
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9015 8-Core Processor
BIOS Model name:             AMD EPYC 9015 8-Core Processor           Unknown CPU @
                               3.6GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        2
Thread(s) per core:          2
Core(s) per socket:          8
Socket(s):                    2
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          90%
CPU max MHz:                  4113.2808
CPU min MHz:                  1500.0000
BogoMIPS:                     7272.49
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                               pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                               nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Platform Notes (Continued)

```

monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq adx smap avx512ifma clflushopt clwb
avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsmr
avx512_vp2intersect flush_lld debug_swap srsrso_user_kernel_no

```

```

L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 128 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	32M	128M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 386384 MB
node 0 free: 385800 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Platform Notes (Continued)

```

node 1 cpus: 4-7,20-23
node 1 size: 387068 MB
node 1 free: 386346 MB
node 2 cpus: 8-11,24-27
node 2 size: 387025 MB
node 2 free: 386350 MB
node 3 cpus: 12-15,28-31
node 3 size: 387019 MB
node 3 free: 386477 MB
node distances:
node  0  1  2  3
  0:  10 12 32 32
  1:  12 10 32 32
  2:  32 32 10 12
  3:  32 32 12 10

```

```

9. /proc/meminfo
   MemTotal:      1584639112 kB

```

```

10. who -r
    run-level 5 Mar 25 09:19

```

```

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.14)
    Default Target   Status
    graphical        running

```

```

12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             apparmor apport blk-availability console-setup e2scrub_reap finalrd getty@ gpu-manager
                                     grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                                     networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb systemd-networkd
                                     systemd-pstore systemd-resolved thermald ufw unattended-upgrades
enabled-runtime                     netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled                             console-getty debug-shell ipmievd iscsid nftables numad serial-getty@ ssh
                                     systemd-boot-check-no-failures systemd-confext systemd-network-generator
                                     systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                                     systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                                     systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
                                     systemd-time-wait-sync tuned upower
generated                           openipmi
indirect                             systemd-sysupdate systemd-sysupdate-reboot
masked                               cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo systemd-networkd-wait-online
                                     x11-common

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-106-generic
root=UUID=40338855-ed28-479d-9fce-40874beafd7
ro

```

```

14. cpupower frequency-info
    analyzing CPU 3:
        current policy: frequency should be within 1.50 GHz and 3.60 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3600MHz

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

20. Disk information
SPEC is set to: /cpu2017-1.1.9
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Platform Notes (Continued)

/dev/sda2 ext4 1.8T 145G 1.5T 9% /

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS700A-E13-RS12U
Product Family: Server
Serial:      T4S0CG0000KU
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R8GA0PB2-CCPWF 64 GB 2 rank 6400
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:   American Megatrends Inc.
  BIOS Version:  1002
  BIOS Date:    10/14/2025
  BIOS Revision: 10.2
-----

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
 526.blender_r: -funsigned-char -DSPEC_LP64
 527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
 -Wl,-mllvm -Wl,-reduce-array-computations=3
 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
 -fstruct-layout=7 -mllvm -unroll-threshold=50
 -mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
 -lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
 -Wl,-mllvm -Wl,-reduce-array-computations=3
 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
 -O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
 -mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
 -lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Mar-2026

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 388

eterio 217 RZ3 (3.60 GHz, AMD EPYC 9015)

SPECrate®2017_fp_peak = 395

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Mar-2026

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-25 17:08:40-0400.

Report generated on 2026-04-22 12:57:15 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-22.