



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

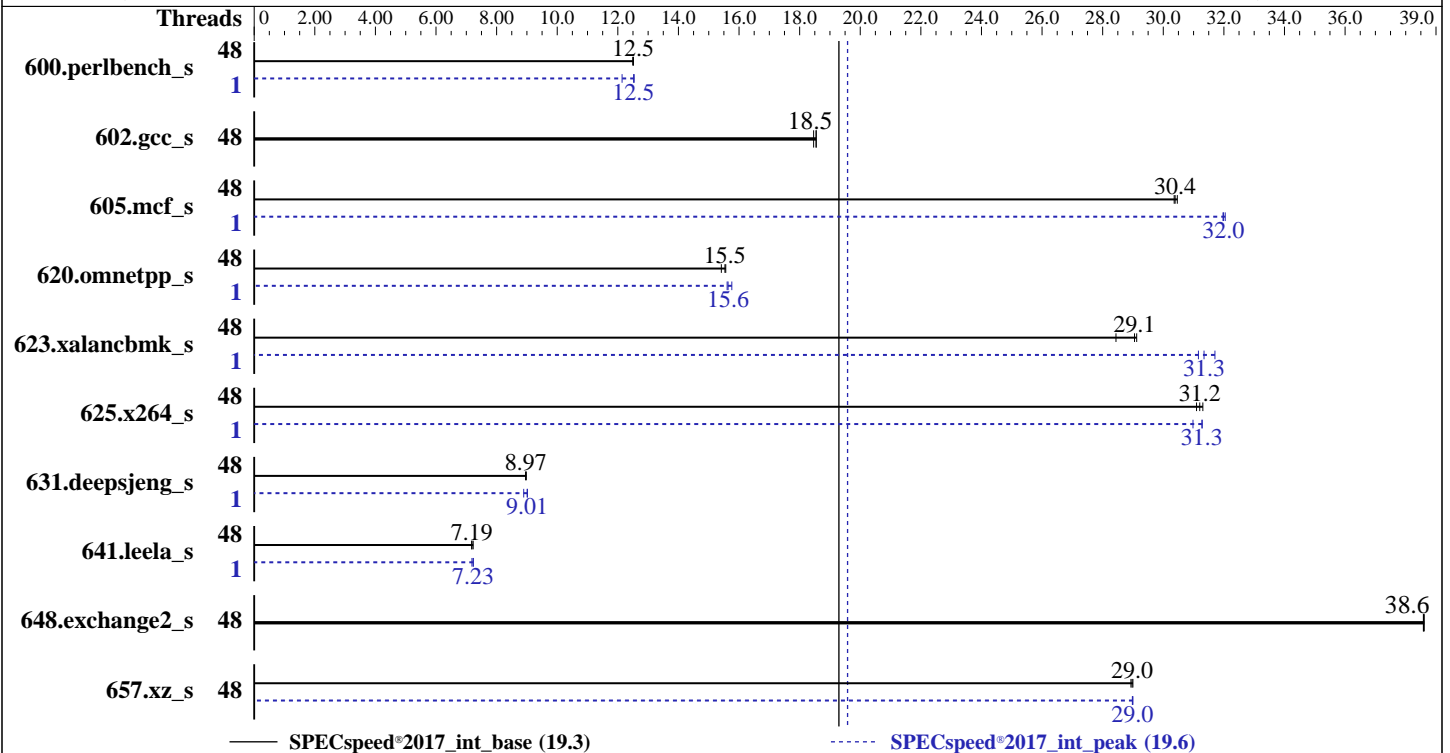

Hardware

CPU Name: AMD EPYC 8435P
 Max MHz: 4500
 Nominal: 2450
 Enabled: 48 cores, 1 chip
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 192 GB (6 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 480 GB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.53.6-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version v2.10 04/02/2026
 released Apr-2026
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2026
Hardware Availability: Jun-2026
Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	142	12.5	142	12.5	142	12.5	1	142	12.5	146	12.1	142	12.5
602.gcc_s	48	215	18.5	215	18.5	216	18.5	48	215	18.5	215	18.5	216	18.5
605.mcf_s	48	156	30.4	155	30.5	155	30.4	1	148	32.0	148	32.0	147	32.0
620.omnetpp_s	48	105	15.6	105	15.5	106	15.4	1	105	15.6	104	15.6	103	15.8
623.xalancbmk_s	48	49.8	28.4	48.7	29.1	48.8	29.1	1	45.5	31.2	44.7	31.7	45.2	31.3
625.x264_s	48	56.3	31.3	56.7	31.1	56.5	31.2	1	56.4	31.3	56.4	31.3	56.9	31.0
631.deepsjeng_s	48	160	8.96	160	8.97	160	8.98	1	161	8.89	159	9.01	159	9.02
641.leela_s	48	238	7.18	237	7.19	236	7.23	1	237	7.19	236	7.23	236	7.23
648.exchange2_s	48	76.1	38.6	76.2	38.6	76.2	38.6	48	76.1	38.6	76.2	38.6	76.2	38.6
657.xz_s	48	213	29.0	214	28.9	213	29.0	48	213	29.0	213	29.0	213	29.0

SPECspeed®2017_int_base = **19.3**

SPECspeed®2017_int_peak = **19.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

tuned-adm profile was turned off using 'tuned-adm off'



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2026
Hardware Availability: Jun-2026
Software Availability: Jul-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

NUMA memory domains per socket set to Two memory domains per socket

AMD Periodic Directory Rinse Tuning set to Blended

ACPI CST C2 Latency set to 18 microseconds

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling
Package Power Limit Control Mode set to Manual
Package Power Limit Value set to 225

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jun 4 14:16:42 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
14:16:42 up 11 min, 3 users, load average: 0.00, 0.07, 0.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.16.0.100 14:13 3.00s 0.01s 0.00s sudo ./run_intspeed.py
root pts/1 172.16.0.100 14:13 3.00s 0.66s 0.03s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2026
Hardware Availability: Jun-2026
Software Availability: Jul-2025

Platform Notes (Continued)

```

pending signals          (-i) 772306
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files                (-n) 999999
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes       (-u) unlimited
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/bash ./run_intspeed_sh.sh
sudo ./run_intspeed.py
sudo ./run_intspeed.py
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeer
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.intspeer.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 8435P 48-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 26
model          : 2
stepping       : 1
microcode      : 0xb002162
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 192 4K pages
cpu cores      : 48
siblings       : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2026
Hardware Availability: Jun-2026
Software Availability: Jul-2025

Platform Notes (Continued)

```

On-line CPU(s) list:          0-47
Vendor ID:                    AuthenticAMD
Model name:                   AMD EPYC 8435P 48-Core Processor
CPU family:                   26
Model:                        2
Thread(s) per core:          1
Core(s) per socket:          48
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4892.74
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                               pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                               nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                               monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave
                               avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                               sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                               perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                               hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                               vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                               rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                               avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                               cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                               avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                               amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                               tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                               pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnm
                               avx512vbmi umip pku ospke avx512_vbmi2 gfn1 vaes vpclmulqdq
                               avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                               bus_lock_detect movdiri movdir64b overflow_recov succor smca fsm
                               avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed
                               srso_user_kernel_no amd_lbr_pmc_freeze

Virtualization:               AMD-V
L1d cache:                    2.3 MiB (48 instances)
L1i cache:                    1.5 MiB (48 instances)
L2 cache:                     48 MiB (48 instances)
L3 cache:                     256 MiB (8 instances)
NUMA node(s):                 2
NUMA node0 CPU(s):           0-23
NUMA node1 CPU(s):           24-47
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer
                               sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                               disabled; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2026
Hardware Availability: Jun-2026
Software Availability: Jul-2025

Platform Notes (Continued)

L1d	48K	2.3M	12 Data	1	64	1	64
L1i	32K	1.5M	8 Instruction	1	64	1	64
L2	1M	48M	16 Unified	2	1024	1	64
L3	32M	256M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23
node 0 size: 96445 MB
node 0 free: 95847 MB
node 1 cpus: 24-47
node 1 size: 96660 MB
node 1 free: 95421 MB
node distances:
node  0  1
  0:  10  12
  1:  12  10

```

9. /proc/meminfo

MemTotal: 197740556 kB

10. who -r

run-level 3 Jun 4 14:05

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@

indirect pcsd saned@ systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=3b2a6c4c-85d4-4fc4-a0f9-42d5898806b6
splash=silent
mitigations=auto
quiet

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

security=apparmor

14. cpupower frequency-info

analyzing CPU 32:

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

No current active profile.

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	447G	20G	423G	5%	/home

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:    ProLiant DL145 Gen11
Product Family: ProLiant
Serial:     41600016J0A1
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
3x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
3x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:    HPE
BIOS Version:   2.10
BIOS Date:      04/02/2026
BIOS Revision:  2.10
Firmware Revision: 1.76
```

Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
  | 657.xz_s(base, peak)  
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
    | 641.leela_s(base, peak)  
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

602.gcc_s: basepeak = yes

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.3.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.45 GHz, AMD EPYC 8435P)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-04 04:46:42-0400.

Report generated on 2026-06-30 17:08:54 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-30.